


high-performance audio Matrix switcher for balanced stereo audio signals. The unit switches balanced stereo audio to the selected preview and program outputs.

- Stand alone or VP-727(xl) Companion Switcher.
- Inputs - 8 balanced stereo audio on dual XLR (F) connectors.
- Outputs - 2 balanced stereo (1 program & 1 preview) on dual XLR (M) connectors, and a single S/PDIF program output on a RCA connector.
- Headphone Output - Program or preview (selectable).
- Input Level Control - Each input and output.
- Take Button - For executing preview to program switching (with the option to either CUT or FADE (mix) between the audio sources).
- Front Panel Lockout.
- Preview & Program Mute Buttons.
- Audio-Follow-Video - When connected to the VP-727 (xl).
- Proc Amp - Base, treble, balance & delay (per input).
- Flexible Control - Front Panel, RS-232 and RS-485 (to connect to VP-727(xl) and VP-727T T-Bar controller).
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 2U. Rack "ears" included.

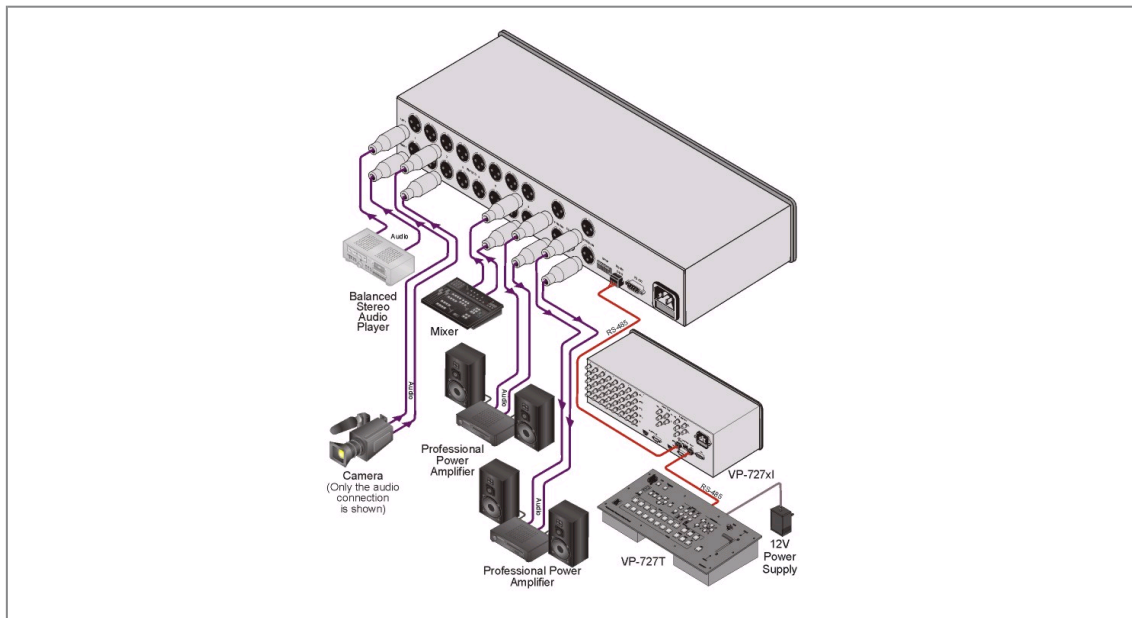

(F) connectors.

- **Outputs** - 2 balanced stereo (1 program & 1 preview) on dual XLR (M) connectors, and a single S/PDIF program output on a RCA connector.
- **Headphone Output** - Program or preview (selectable).
- **Input Level Control** - Each input and output.
- **Take Button** - For executing preview to program switching (with the option to either CUT or FADE (mix) between the audio sources).
- **Front Panel Lockout.**
- **Preview & Program Mute Buttons.**
- **Audio-Follow-Video** - When connected to the VP-727(xl).
- **Proc Amp** - Base, treble, balance & delay (per input).
- **Flexible Control** - Front Panel, RS-232 and RS-485 (to connect to VP-727(xl) and VP-727T T-Bar controller).
- **Worldwide Power Supply** - 100-240V AC.
- **Standard 19" Rack Mount Size** - 2U. Rack "ears" included.

OUTPUTS: 1 Program left and right and 1 Preview left and right stereo balanced audio outputs + 4dBm/50kΩ on XLR M connectors 1 Headphone output on a 6.5mm jack 1 Program S/PDIF output on an RCA connector

MAX. OUTPUT LEVEL: >4.5Vpp
BANDWIDTH (-3dB): >22kHz
S/N RATIO: >85dB
CROSSTALK @1kHz (all hostile): Program: <-88dB Preview: <-92dB Balanced: <-88dB Phones (Preview): <-82dB Phones (Program): <-80dB

CONTROLS: Preview level: <-72dB to 62dB in and out Program level: <-73dB to 45dB in and out Program bass: 0dB to 27dB @100kHz Program treble: 0dB to 11dB @10kHz Program balance: -18dB to 0dB Program balanced (+/-) level: <-80db to 47dB Phones level (preview and program level): <-80dB to 57dB

COUPLING: AC, input and output
AUDIO THD + NOISE: Program: 0.02%; Preview: 0.002%;

Program phones: 0.034%; Preview phones: 0.018%

AUDIO 2nd HARMONIC: Preview phones: 0.03%; Program phones: 0.04%; Program: 0.03%; Preview: 0.04%; Program balanced: 0.04%

POWER SOURCE: 100-240 VAC, 50/60 Hz; 10VA

DIMENSIONS: 19-inch (W), 7-inch (D) 2U (H) rack-mountable

WEIGHT: 3.5kg (7.7lbs) approx.

ACCESSORIES: Power cord, Null modem adapter, Windows®-based Kramer control software