

# ATC-AMFM2

## Dual AM/FM Tuner Card

The ATC-AMFM2 tuner card is designed for use with Crestron's **CEN-TRACK** Tuner Rack, and with Adagio systems that features tuner card slots. The ATC-AMFM2 provides two (2) fully independent AM/FM tuners on a single card.

### SPECIFICATIONS

#### Audio

**Maximum Output:** 1 Vrms @ 1kHz

#### FM Tuner (Typical of 2)

**Frequency Range:** 87.50 to 108 MHz (50 or 100 kHz steps)

**Intermediate Frequency:** 10.7 MHz

**Usable Sensitivity:** 11 dBf mono

**S/N Ratio:** 64dB @ 65 dBf mono; 60dB @ 65 dBf stereo

**IF Rejection:** 100dB

**AM Rejection:** 55dB

**Stereo Separation:** 40dB

#### AM Tuner (Typical of 2)

**Frequency Range:** 530 to 1710 kHz (9 or 10 kHz steps)

**Sensitivity:** 3.5  $\mu$ V (RF input level 10dB S+N/N)

**Selectivity:** 10 kHz

**Alternate Channel Selectivity:** 55dB

**Image Rejection:** 35dB

**IF Rejection:** 60dB

#### Connectors

**AM ANT A - B:** (2) 2-pin spring-loaded terminals;

(2) AM shielded loop antennas included;

Impedance: 50 ohms

**FM ANT A - B:** (2) IEC 169-2 coaxial (IEC-to-F adapters included);

(2) FM wire antennas included;

Impedance: 75 ohms


#### Weight

9.84 oz (279 g)




# ATC-AMFM2 Dual AM/FM Tuner Card

Top

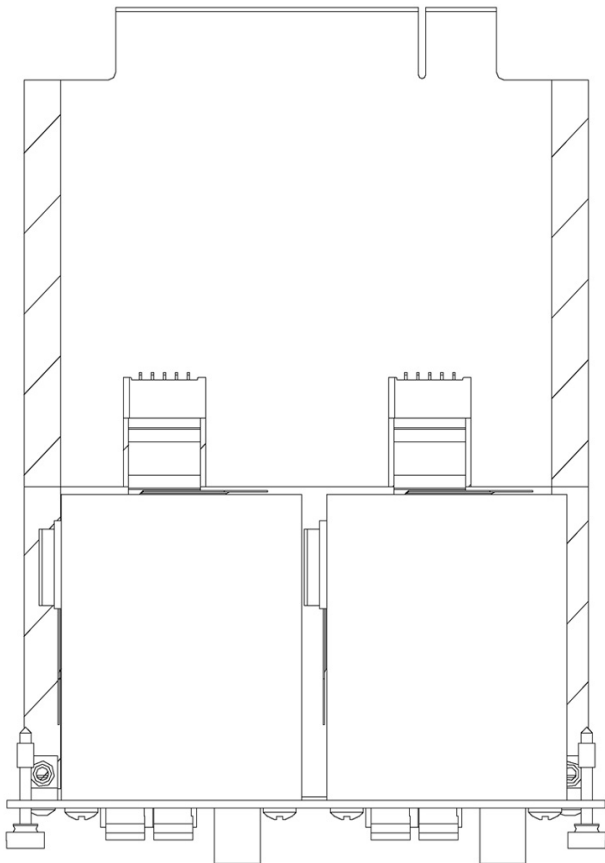

Front

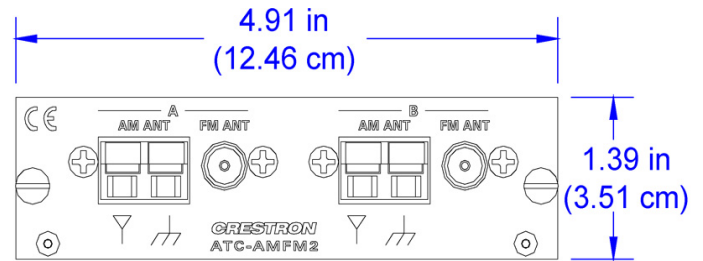

Side

