


The VP-4x8 is a high-performance matrix switcher for computer graphics video signals, with resolutions ranging from VGA through UXGA and higher on 15-pin HD connectors. The unit can route any or all inputs to any or all outputs simultaneously.

- Bandwidth - 400MHz.
- Looping Inputs.
- Delayed Switching™0-3.5sec.
- Take Button - Execute multiple switches all at once.
- Memory Locations - Store multiple switches as presets to be recalled and executed when needed.
- Control - RS-232 (K-Router™ Windows® based software is included), RS- 485, IR remote (included) & Ethernet.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

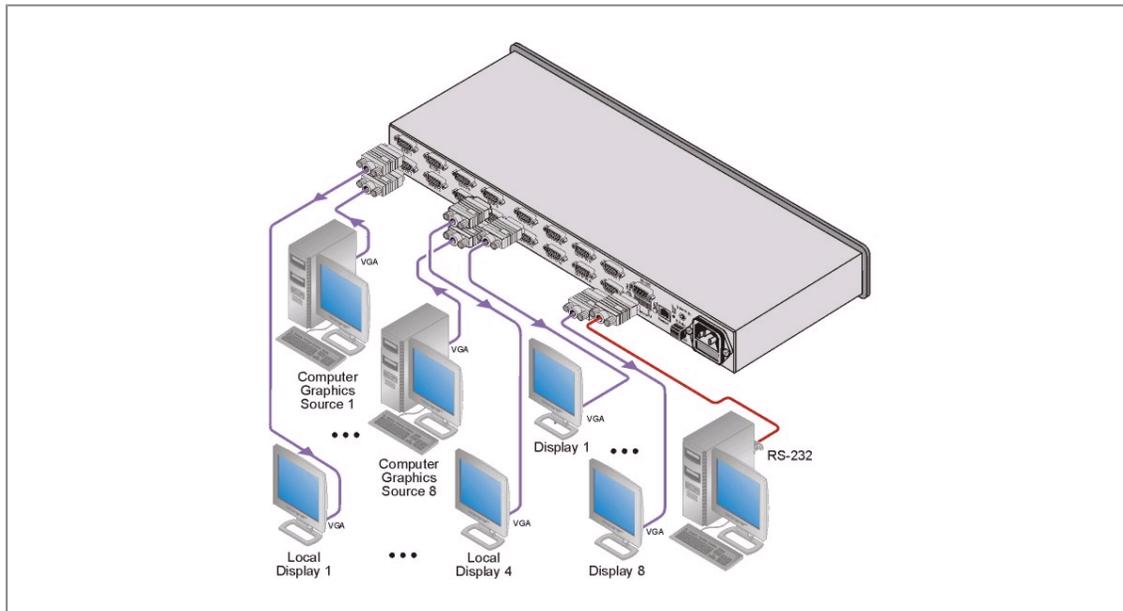

multiple switches all at once. Memory Locations -Store multiple switches as presets to be recalled and executed when needed. Control - RS-232 (K-Router Windows®-based software is included), RS-485, IR remote (included) & Ethernet. Worldwide Power Supply - 100-240V AC. Standard 19" Rack Mount Size - 1U. Rack "ears" included.

- **INPUTS:** - 4 computer graphics video on 15-pin HD connectors (VGA through UXGA)
- **OUTPUTS:** - 8 computer graphics video on 15-pin HD connectors (VGA through UXGA)
- **MAX. OUTPUT LEVEL:** - 1.5Vpp
- **BANDWIDTH (-3dB):** - 400MHz
- **DIFF. GAIN:** - 0.04%
- **DIFF. PHASE:** - 0.04Deg
- **K-FACTOR:** - <0.05%
- **S/N RATIO:** - 75dB
- **CROSSTALK (all hostile):** - -53dB
- **CONTROLS:** - 22 front panel buttons, RS-232, RS-485, Ethernet

POWER SOURCE: 100-240V AC, 50/60Hz, 23VA

MAX. OUTPUT LEVEL: 1.5Vpp.

RESOLUTION: Up to UXGA.

DIFF. GAIN: 0.04%.

DIFF. PHASE: 0.04Deg.

K-FACTOR: <0.05%.

S/N RATIO: 75dB.

CROSSTALK (all hostile): -53dB.

CONTROLS: 22 front panel buttons, RS-232, RS-485, Ethernet.

COUPLING: DC.

POWER SOURCE: 100-240V AC, 50/60Hz, 23VA.

DIMENSIONS: 19" x 7" x 1U (W, D, H) rack mountable.

WEIGHT: 2.7kg (6lbs) approx.

ACCESSORIES: Power cord, null-modem adapter, Windows®-based Kramer control software, infrared remote control transmitter.

OPTIONS: External remote IR receiver cable.