

# TLP Pro 725M

7" WALL MOUNT TOUCHLINK PRO TOUCHPANEL



The Extron TLP Pro 725M is a 7" wall mount TouchLink® Pro Touchpanel with many enhanced features. Extron redesigned this latest TouchLink Pro Touchpanel inside and out with a new, high-performance quad-core processor, eight times more memory, a higher resolution, 1024x600 edge-to-edge glass capacitive touchscreen built with scratch and smudge-resistant Corning® Gorilla Glass®. The TLP Pro 725M also features the convenience of PoE - Power over Ethernet, which allows it to receive power and communication over a single Ethernet cable.

- ▶ 7" capacitive touchscreen with 1024x600 resolution and 24-bit color depth
- ▶ Newly designed inside and out for the ideal balance of performance and style
- ▶ Gorilla Glass® screen is tough, scratch, and smudge-resistant
- ▶ Faster, quad-core processing and eight times more memory
- ▶ Compatible with all IP Link Pro control processors
- ▶ Power over Ethernet provides power and communication over a single Ethernet cable
- ▶ Light sensor adjusts screen brightness as the ambient room lighting changes


## DESCRIPTION

The **TLP Pro 725M** is a 7" wall mount touchpanel that offers stellar performance and superior design. Inside, there's a powerful new quad-core processor and eight times more memory feeding the high resolution 1024 x 600 edge-to-edge glass capacitive touchscreen. The touchscreen, itself, is our most durable yet - built with scratch and smudge-resistant Corning Gorilla Glass. Outside you'll find a stylish, ergonomic enclosure that will complement any contemporary presentation environment.

A host of familiar features provides elegant, simple operation, while PoE, Power over Ethernet streamlines integration by allowing the touchpanel to receive power and communication over a single Ethernet cable.

All TouchLink Pro touchpanels can be customized using Extron GUI Designer software. This powerful interface design software offers ready-to-use templates for a wide variety of rooms and presentation environments.

## PANEL DRAWINGS

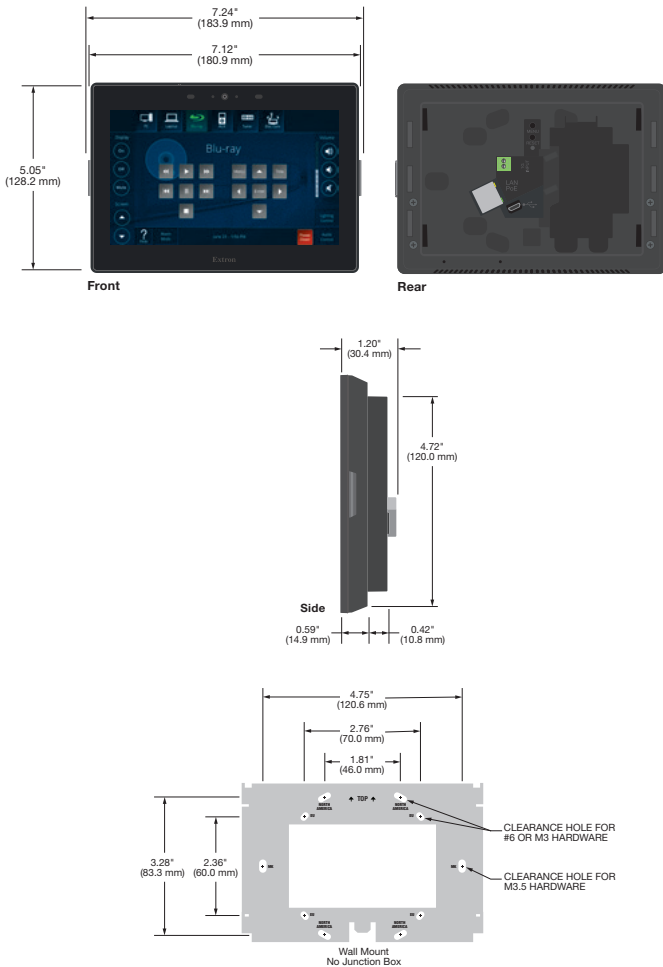

## SPECIFICATIONS

DISPLAY		
Screen type	TFT Active matrix color LCD display	
Size	7" (17.8 cm), measured diagonally	
Resolution	1024x600	
Aspect ratio	Widescreen	
Color depth	24 bit, 16.7 million colors	
Contrast	700:1	
MEMORY		
SDRAM	2 GB	
Flash	4 GB	
COMMUNICATION – ETHERNET INTERFACE		
Ethernet data rate	10/100/1000Base-T, half/full duplex with autodetect	
Ethernet protocol	DHCP, DNS, HTTP, HTTPS, ICMP, SFTP, SSH, TCP/IP, UDP/IP	
<b>Software</b>		
Configuration software	Global Configurator Plus and Professional, GUI Designer	
Programming software	Global Scripter	
Control apps	Extron Control, iGVE	
Resource management software	GlobalViewer Enterprise, iGVE	
Utilities	Toolbelt, Embedded web page	
CONTROL – USB		
Number/signal type	1 high-speed USB 2.0 device	
USB standards	USB 2.0, USB 1.1, USB 1.0 compatible	
AUDIO OUTPUT		
Speaker output	1 mono, 89 dB Max. SPL @ 0.1 m	
<b>Playback format(s)</b>		
Container format	WAV (Microsoft RIFF)	
Encoding	LPCM (uncompressed)	
Audio channels	mono or stereo	
GENERAL		
Power input requirements	Power over Ethernet (PoE 802.3af, class 3)	
<b>Auxiliary power output</b>		
USB	5 VDC, 275 mA	
<b>Temperature/humidity</b>		
Storage: -4 to +158 °F (-20 to +70 °C) / 5% to 90%, noncondensing		
Operating: -4 to +158 °F (-20 to +70 °C) / 20% to 90%, noncondensing		
<b>Mounting</b>	Wall, furniture, or rack	
<b>Enclosure dimensions</b>		
5.05" H x 7.24" W x 1.20" D (128 mm H x 184 mm W x 30 mm D)		
<b>Regulatory compliance</b>		
Safety	CE, c-UL, UL	
EMI/EMC	CE, C-tick, FCC Class B, ICES, VCCI	
Environmental	Complies with the appropriate requirements of RoHS and WEEE.	
<b>Warranty</b>	3 years parts and labor; touchpanel display and overlay components are covered for 1 year	
<b>Model</b>	<b>Version Description</b>	<b>Part number</b>
TLP Pro 725M	Black - Wall Mount	60-1563-02
TLP Pro 725M	White - Wall Mount	60-1563-03
<b>Optional Accessories</b>		
<b>Model</b>	<b>Version Description</b>	<b>Part number</b>
RM 5	Rack Mount Kit for TLP Pro 725M	70-1137-02
SMK 5	TLP Surface Mount Kit - Black	70-1140-22
SMK 2	TLP Surface Mount Kit - White	70-1140-23
RWM 2	TLP Recessed Wall Mount Kit	70-1141-23

For complete specifications, please go to [www.extron.com](http://www.extron.com)  
Specifications are subject to change without notice.

### WORLDWIDE SALES OFFICES

Anaheim • Raleigh • Silicon Valley • Dallas • New York • Washington, DC • Toronto • Mexico City • Paris • London  
Frankfurt • Madrid • Stockholm • Amersfoort • Moscow • Dubai • Johannesburg • Tel Aviv • Sydney • Melbourne  
Bangalore • Mumbai • New Delhi • Singapore • Seoul • Shanghai • Beijing • Hong Kong • Tokyo

[www.extron.com](http://www.extron.com)