




RC-5B2

Wall Plate Insert – 2-Button Auxiliary Control Panel

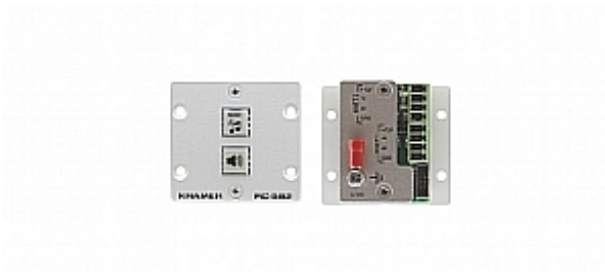

The RC-5B2 is a 2-button auxiliary control panel with backlit RGB buttons. It can be used as an auxiliary controller when connected via K-NET™ to a master room controller (such as the RC-74DL).

FEATURES

- **2-Button Faceplate** - With backlit, configurable color buttons.
- **K-NET™ Control Channel** - For connecting individual and daisy-chaining multiple panels.
- **K-Config Installation and Configuration.**
- **USB Port** - For upgrading the firmware and setting the K-Net ID number.
- **Compatibility** - Can be used in any compatible opening: wall boxes, TBUS, etc.
- **Color** - Supplied with grey, black and white front plates.

TECHNICAL SPECIFICATIONS

PORTS:	2 K-NET on terminal block connectors, 1 USB for programming.
CONTROLS:	2 buttons.
POWER CONSUMPTION:	5V DC, 40mA.
OPERATING TEMPERATURE:	0° to +40°C (32° to 104°F).
STORAGE TEMPERATURE:	-40° to +70°C (-40° to 158°F).
HUMIDITY:	10% to 90%, RHL non-condensing.
DIMENSIONS:	5.1cm x 3.4cm x 4.7cm (2" x 1.3" x 1.9") W, D, H.
WEIGHT:	0.05kg (0.11lb).
SHIPPING WEIGHT:	0.2kg (0.44lb).
SHIPPING DIMENSIONS:	16.3cm x 12.5cm x 5.5cm (6.4" x 4.9" x 2.2") W, D, H.
INCLUDED ACCESSORIES:	Grey, black and white front plates.