


be connected to a power source (within existing power supply limitations).

- Worldwide Power Supply - 100-240V AC.
- Standard 19 inch Rack Mount Size - 1U.

Matched Receivers: TP-46, TP-122, TP-124, TP-50, TP-305A, TP-310A.

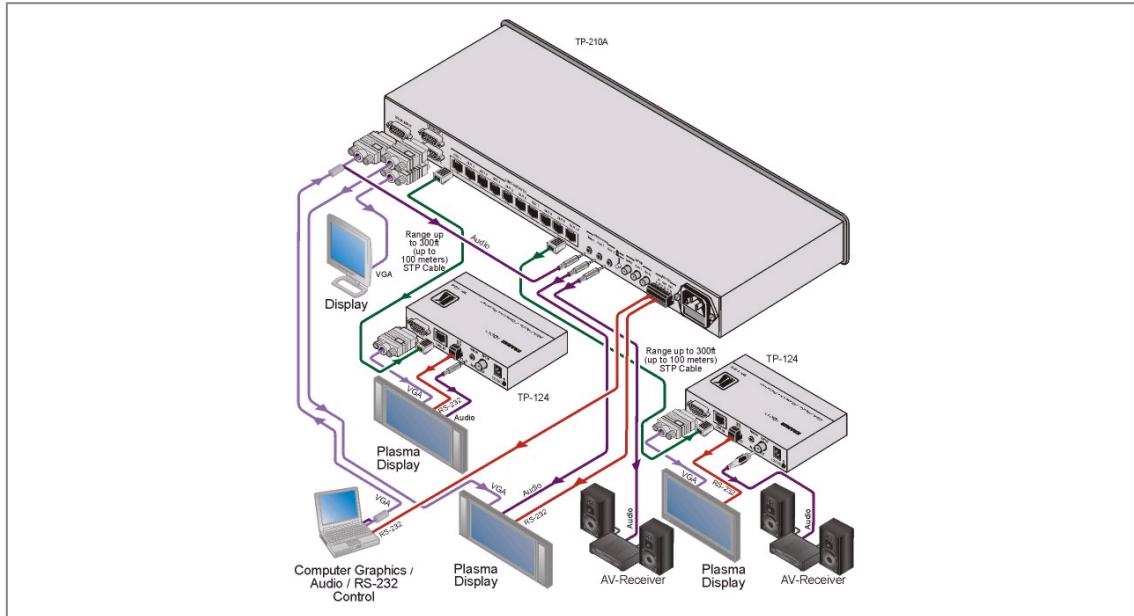

signal to 2 outputs plus 10 twisted pair outputs.


- Resolution - Up to UXGA.
- Inputs - Computer graphics video (15-pin HD), stereo audio (3.5mm), S/PDIF (RCA) & RS-232 (terminal block).
- Outputs - 2 (each input format) and 10 twisted pair.
- Twisted Pair Connectors - RJ-45.
- Audio Input Connectors - 2 3.5mm (unbalanced) & 2 RCA (S/PDIF).
- RS-232 Input Connectors - 4-pin terminal block (2xTx, RX & Gnd).
- Sync Polarity Settings - H & V switches.
- Twisted Pair Outputs - Requires a compatible computer graphics video twisted pair receiver to convert the twisted pair signals back into a computer graphics video signals.
- System Range (Twisted Pair) - Up to 100m (300ft).
- Cable (Twisted Pair) - UTP (unshielded twisted pair) or STP (shielded twisted pair) such as CAT 5.
- Power Connect™ System Only the TP-210A needs to



be connected to a power source (within existing power supply limitations).

- Worldwide Power Supply - 100-240V AC.
- Standard 19 inch Rack Mount Size - 1U.

Matched Receivers: TP-46, TP-122, TP-124, TP-50, TP-305A, TP-310A.

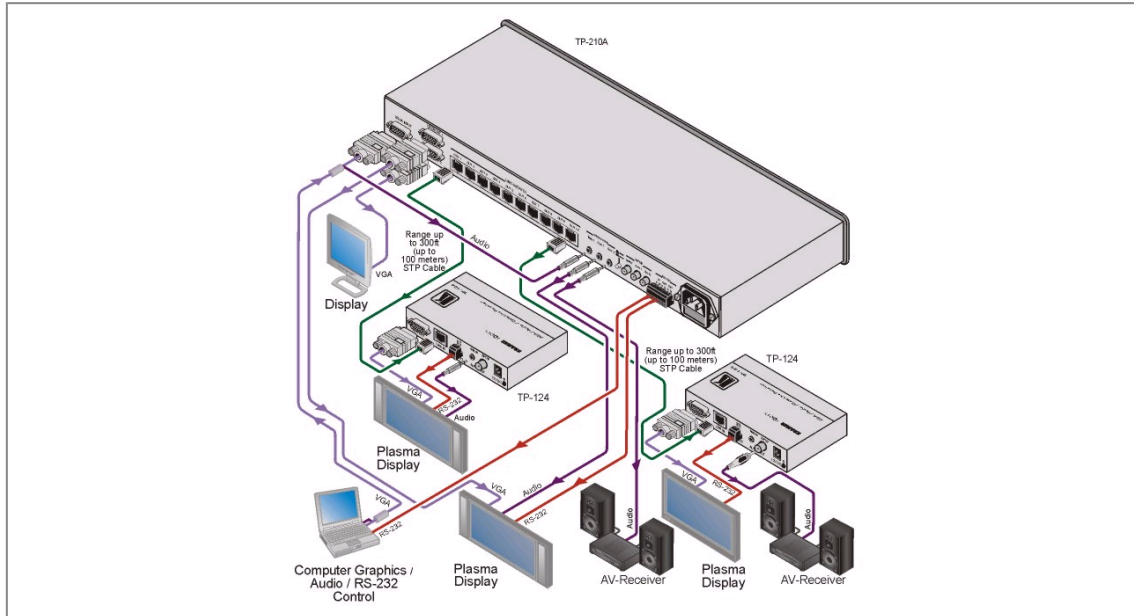

- S/N RATIO: - AUDIO: >75dB
- TOTAL GAIN: - AUDIO: Analog/analog: 0dB
Analog/SPDIF: -12dBFS
- TND+N: - AUDIO: <0.02%
- POWER SOURCE: - 100-240 VAC, 50/60 Hz, 46VA
- DIMENSIONS: - 19" x 7" x 1U W, D, H, rack mountable
- WEIGHT: - 3kg (6.6lbs) approx.

Sync Polarity Settings
Twisted Pair Outputs

H & V switches.

Requires a compatible computer graphics video twisted pair receiver to convert the twisted pair signals back into a computer graphics video signals.

System Range (Twisted Pair)
Cable (Twisted Pair)

Up to 100m (300ft).

UTP (unshielded twisted pair) or STP (shielded twisted pair) such as CAT 5.

Power Connect System

Only the TP-210A needs to be connected to a power source (within existing power supply limitations).

Worldwide Power Supply

Standard 19 inch Rack Mount Size

Matched Receivers: TP-46, TP-122, TP-124, TP-50, TP-305A, TP-310A.

INPUT:

1 UXGA Video on a 15-pin HD connector
1 audio on a 3.5mm mini jack connector
1 S/PDIF on an RCA connector
RS-232 with 1 Rx/D line on terminal block connectors