




The VM-12HDCP is an HDCP compliant distribution amplifier for DVI-D signals with resolution up to 1080p or UXGA. It reclocks and equalizes the signal and distributes it to 12 identical outputs.

- Max Data Rate 1.65 Gbps.
- HDTV Compatible.
- HDCP Compliant.
- Kramer re-Klocking™ and Equalization Technology – Rebuilds the digital signal to travel longer distances.
- Enhanced EDID (Extended Display Identification Data)
 The unit stores and recalls a default EDID setting in non-volatile memory from the output allowing convenient and reliable connection to the source.
- Active Input & Output LED Indicators.
- Worldwide Power Supply 100-240V AC.
- Standard 19" Rack Mount Size – 1U. Rack "ears" included.

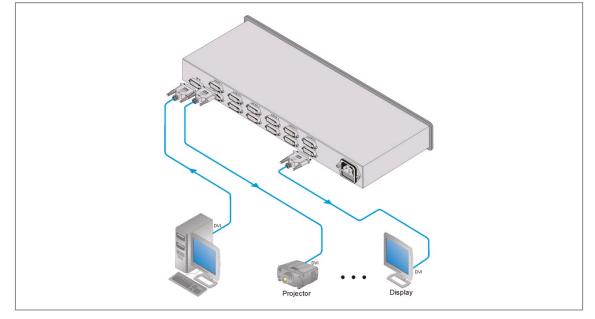

Klocking™ and Equalization Technology Rebuilds the digital signal to travel longer distances. Enhanced EDID (Extended Display Identification Data) - The unit stores and recalls a default EDID setting in non-volatile memory from the output allowing convenient and reliable connection to the source. Active Input & Output LED Indicators. Worldwide Power Supply - 100-240V AC. Standard 19" Rack Mount Size - 1U. Rack "ears" included.

- INPUT: 1 DVI, 1.2Vpp on a DVI Molex 24-pin female connector; DDC signal 5Vpp (TTL)
- OUTPUTS: 12 DVI, 1.2Vpp on DVI Molex 24pin female connectors; DDC signal 5Vpp (TTL)
- BANDWIDTH: 1.65Gbps
- CONTROLS: SELECT and READ buttons for selecting and storing EDID information
- POWER SOURCE: 100-240 VAC, 50/60Hz, 11VA
- DIMENSIONS: -19-inch (W), 7-inch (D), 1U (H)
- WEIGHT: 2.5kg (5.5lbs) approx.

OPTIONS: NIAITIEL DVI CADIES

BANDWIDTH: 1.65Gbps.

CONTROLS: SELECT and READ buttons for

selecting and storing EDID

information.

POWER 100-240V AC, 50/60Hz, 11VA.

SOURCE:

DIMENSIONS: 19" x 7" x 1U (W, D, H) rack

mountable.

WEIGHT: 2.5kg (5.5lbs) approx.

ACCESSORIES: Power cord.

OPTIONS: Kramer DVI cables.