




The VM-16HDMI is a distribution amplifier for HDMI signals. It reclocks and equalizes the signal and distributes it to 16 independent outputs.

- Maximum Data Rate -1.65Gbps.
- HDTV Compatible.
- Kramer re-Klocking & Equalization Technology -Rebuilds the digital signal integrity to travel longer distances.
- HDCP Compliant.
- Enhanced EDID (Extended Display Identification Data)
 - Can capture an EDID setting from a device connected to the output and store it in a non-volatile memory. The user can recall this setting or a factory default EDID.
- Active Output LED Indictors.
- Worldwide Power Supply -100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

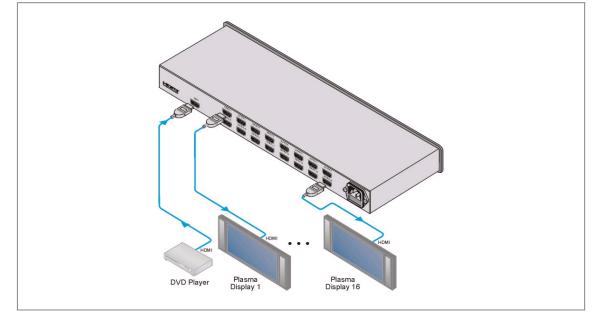

Equalization Technology - Rebuilds the digital signal integrity to travel longer distances.HDCP Compliant.Enhanced EDID (Extended Display Identification Data) - Can capture an EDID setting from a device connected to the output and store it in a non-volatile memory. The user can recall this setting or a factory default EDID.Active Output LED Indictors.Worldwide Power Supply - 100-240V AC.Standard 19" Rack Mount Size - 1U. Rack "ears" included.

- INPUT: HDMI Connector
- OUTPUTS: 16 HDMI Connectors
- BANDWIDTH: Supports up to 1.65Gbps per graphic channel
- COMPLIANCE WITH HDMI STANDARD: -Supports HDMI 1.0 and HDCP
- CONTROLS: SELECT and READ buttons for selecting and storing EDID information
- INDICATOR LEDs: OUTPUT STATUS 1 to 16
- POWER SOURCE: -100-264 VAC, 50/60Hz 25VA

weight: 4.5kg. (9.9lbs.) approx.

ACCESSORIES: Power cord

OPTIONS: HDMI/HDMI male-to-male

cables

CONTROLS: SELECT and READ buttons for

selecting and storing EDID

information.

INDICATOR OUTPUT STATUS 1 to 8/16.

LEDs:

POWER 100-240V AC, 50/60Hz 25VA.

SOURCE:

DIMENSIONS: 19" x 7" x 1U W, D, H, rack

mountable.

WEIGHT: 4.5kg (9.9lbs) approx.

ACCESSORIES: Power cord.

OPTIONS: HDMI/HDMI male-to-male

cables.