


The **VM-20HD** is a high performance distribution amplifier for SDI (SMPTE 259M and SMPTE 344M) and HD-SDI (SMPTE 292M) signals. The unit can be configured as 1:20 or two 1:10 distribution amplifiers.

- Max Data Rate - 1.485 Gbps.
- Multi-Mode Operation - Configure as one 1:20 or two 1:10 or Dual 1:10 DAs.
- Looping Inputs for Cascading Multiple Units.
- Resolution - 8 & 10-bits (automatic).
- Kramer re-Klocking™ & Equalization Technology - Rebuilds the digital signal to travel longer distances.
- HD-SDI & SDI Input Indication LEDs.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

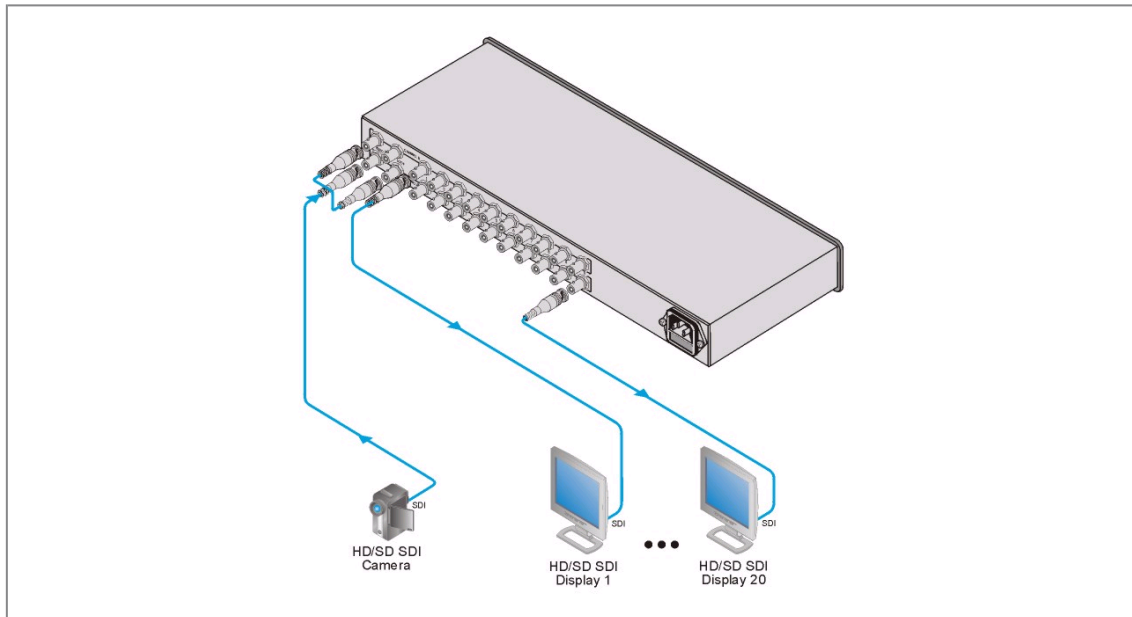

- Resolution: 8 & 10 bits (automatic).
- Multi-Mode Operation - Configure as one 1:20 or two 1:10 or Dual 1:10 DAs.
- Looping Inputs for Cascading Multiple Units.
- Kramer re-Klocking™ & Equalizatic Technology - Rebuilds the digital signal to travel longer distances.
- HD-SDI & SDI Input Indication LEDs.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

POWER SOURCE: 100-240VAC, 50/60Hz, 9VA
DIMENSIONS: 19-inch (W), 7-inch (D), 1U (H)
WEIGHT: 1.5kg. (3.3lbs.) approx.
ACCESSORIES: Power cord
INPUTS: 2 SMPTE-259M, 292M, 344M serial video, 75 ohms on a BNC connector
OUTPUTS: 22 equalized and reclocked SMPTE-259M, 292M, 344M outputs, 75 ohms on BNC connectors
RESOLUTION: 8 and 10-bits (automatic)
MAX. OUTPUT LEVEL: 800mVpp /75 ohms
MAX. BAUD RATE: 1.485Gbps