

VM-2C


1:2 Component Video Distribution Amplifier







The VM-2C is a high performance distribution amplifier for component Video (RGB/YUV) signals. It will take one input, provides correct buffering and isolation and distributes the signal to 2 identical outputs.

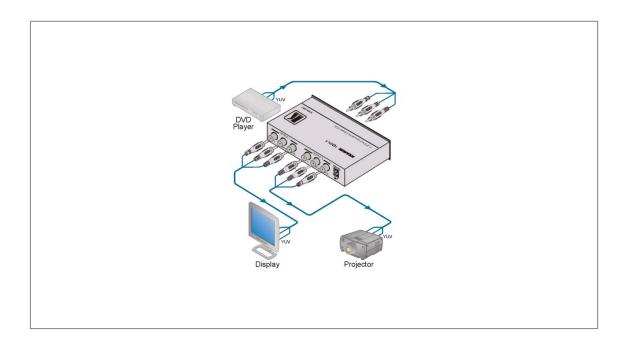



VM-2C

FEATURES

- High Bandwidth 500MHz (-3db)
- HDTV Compatible
- Compact Size Part of the Kramer TOOLS family of compact, high quality and cost effective solutions

TECHNICAL SPECIFICATIONS

DIFF. PHASE: 0.03% K-FACTOR: <0.05%

S/N RATIO: 73dB weighted CROSSTALK (all 58dB @ 5MHz

hostile):

COUPLING: DC

POWER SOURCE: 12 VDC, 71mA

DIMENSIONS: 12cm x 7.5cm x 2.5cm (4.7" x

0.98" x 2.95"), W, D, H

WEIGHT: 0.3kg. (0.66lbs.)

ACCESSORIES: Power supply, mounting

bracket

INPUTS: component video (Y, PB/CB,

PR/CR, or Y, U, V) on RCA connectors, $1Vpp/75 \Omega$

OUTPUTS: 2 component video (Y, PB/CB,

PR/CR, or Y, U, V) on RCA connectors, $1Vpp/75 \Omega$

MAX. OUTPUT 2.4Vpp

LEVEL:

BANDWIDTH (- 510MHz.

3dB):

DIFF. GAIN: 0.03%

OPTIONS: RK-3T 19" rack adapter.