




The VM-2HDCP is an HDCP compliant distribution amplifier for DVI-D signals with resolutions up to 1080p or UXGA. It reclocks and equalizes the signal and distributes it to two identical outputs.

- MaxData Rate 1.65Gbps.
- Kramer re-Klocking & Equalization Technology -Rebuilds the digital signal to travel longer distances.
- HDCP Compliant.
- Enhanced EDID (Extended Display Identification Data)
 The unit can store and recall a default EDID setting in non-volatile memory from one of the outputs allowing convenient and reliable connection to the source.
- Active Input & Output LED Indictors.
- Kramer DigiTOOLS® 3 units can be rack mounted side-by-side in a 1U rack space.

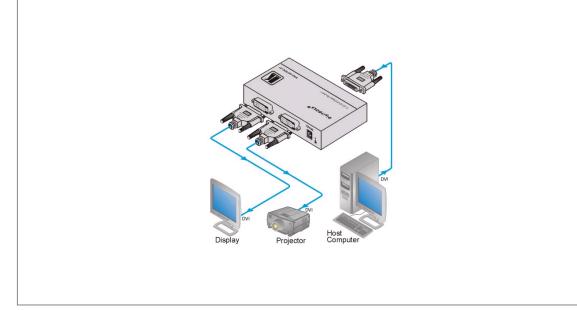

- Technology Rebuilds the digital signal to travel longer distances.
- HDCP Compliant.
- Enhanced EDID (Extended Display Identification Data) - The unit can store and recall a default EDID setting in non-volatile memory from one of the outputs allowing convenient and reliable connection to the source.
- Active Input & Output LED Indictors.
- Kramer DigiTOOLS® 3 units can be rack mounted side-by-side in a 1U rack space.
- INPUT: 1 DVI, 1.2Vpp on a DVI Molex 24pin female connector; DDC signal 5Vpp (TTL).
- OUTPUTS: 2 DVI, 1.2Vpp on DVI Molex 24pin female connectors; DDC signal 5Vpp (TTL).

CONTROLS:	button for selecting and storing EDID information.
POWER SOURCE:	12V DC. 180 mA.
DIMENSIONS:	12.1cm x 7.18cm x 2.42cm (4.76" x 2.83" x 0.95", W, D, H.).
WEIGHT:	0.28kg. (0.62 lbs.) approx.
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	Kramer DVI cables.
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	RK-3T 19" rack adapter.