

VM-2HDMIxI


1:2 HDMI Distribution Amplifier







The VM-2HDMIxI is a distribution amplifier for HDMI signals. The unit reclocks and equalizes the signal and distributes it to two identical outputs.

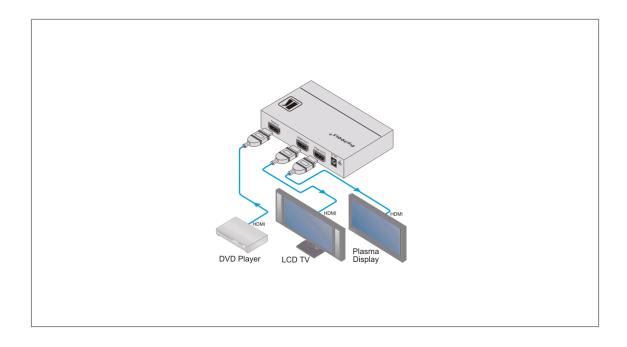



VM-2HDMIxI

FEATURES

- Max Data Rate 2.25Gbps.
- HDTV Compatible.
- HDCP Compliant.
- HDMI 1.3a Compliant.
- Enhanced EDID (Extended Display Identification Data) The unit can store and recall a default EDID setting in non-volatile memory from one of the outputs allowing convenient and reliable connection to the source.
- Kramer re-Klocking™ & Equalizatic Technology - Rebuilds the digital signal integrity to travel longer distances.
- Active Output LED.
- Compact DigiTOOLS™3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

TECHNICAL SPECIFICATIONS

INPUT: 1 HDMI connector.

OUTPUTS: 2 HDMI connectors.

BANDWIDTH: Supports up to 2.25Gbps

bandwidth per graphic

channel.

COMPLIANCE WITH Supports HDMI 1.3 and

HDMI STANDARD: HDCP.

CONTROLS: EDID SETUP button, input

select button.

INDICATOR LEDs: IN 1, IN 2, OUT 1, OUT 2,

and ON LEDs.

POWER SOURCE: 5V DC, 910mA.

DIMENSIONS: 12cm x 7.2cm x 2.4cm

(4.7" x 2.8" 1.0") W, D, H.

WEIGHT: 0.3 kg (0.67 lbs) approx.

ACCESSORIES: Power supply, bracket

installation kit.

OPTIONS: HDMI/HDMI male-to-male

cables.