




VM-3SxI

1:3 s-Video Distributor



The Kramer **VM-3SxI** is a high performance distribution amplifier for s-Video (Y/C) signals. It takes one input, provides correct buffering and isolation, and distributes the signal to three identical outputs.

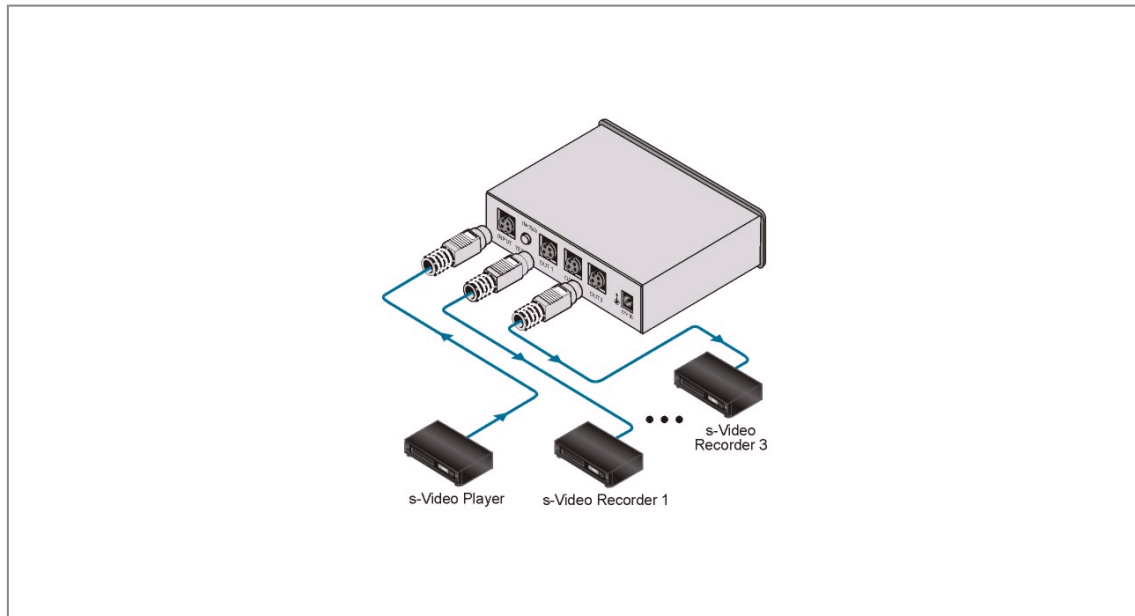



VM-3Sxl

FEATURES

- **Bandwidth (Y)** - 200MHz (- 3dB).
- **Selectable Input Signal Termination.**
- **Desktop Size** - Compact size. Three units can be rack mounted side-by-side in a 2U rack space with the optional RK-SM adapter.

TECHNICAL SPECIFICATIONS

| | |
|--------------|--|
| INPUT: | 1 s-Video, 1Vpp/75 Ω (Y), 0.3Vpp/75 Ω (C) on a4P connector |
| OUTPUTS: | 3 s-Video, 1Vpp/75 Ω (Y), 0.3Vpp/75 Ω (C) on4P connectors |
| OUTPUT | AC |
| COUPLING: | |
| CONTROLS: | Termination Switch |
| S/N RATIO: | >80dB |
| VIDEO | >200 MHz -3dB (Y) |
| BANDWIDTH: | |
| MAX. VIDEO | 2Vpp |
| OUTPUT: | |
| DIFF. GAIN: | <0.03 % |
| DIFF. PHASE: | <0.03 Deg. |
| K-FACTOR: | <0.05% |
| DIMENSIONS | 11.7cm x 6cm x 3.2cm (4.6" x |
| (W,D,H): | 2.4" x 1.3") |
| WEIGHT: | 0.24 kg (0.53 lbs.) Approx. |
| POWER | 12VDC, 70mA |
| SOURCE: | |
| OPTIONS: | RK-SM rack adapter |
| OPTIONS: | RK-SM 19" rack adapter. |