


VM-3VxI

1:3 Video Distribution Amplifier





The Kramer VM-3Vxl is a distribution amplifier for composite or SDI video signals. It will take one input, provide correct buffering and isolation and distribute the signal to three identical outputs.

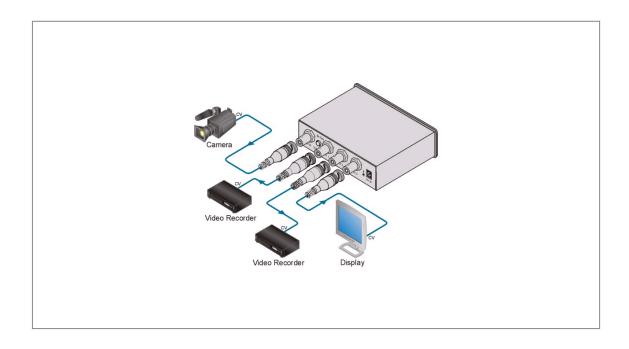



VM-3VxI

FEATURES

- High Bandwidth 430MHz (- 3dB).
- Selectable Input Signal Termination.
- Desktop Size Compact size. Three units canbe rack mounted side-by-side in a 2U rack spacewith the optional RK-SM adapter.

TECHNICAL SPECIFICATIONS

INPUT: 1 Composite Video, 1Vpp/75

 Ω , on a BNC connector

OUTPUTS: 3 Composite Video, $1Vpp/75\Omega$,

on BNC connectors

OUTPUT AC.

COUPLING:

CONTROL: 75Ω Termination Switch

S/N RATIO: >77dB

VIDEO 430 MHz -3dB

BANDWIDTH:

MAX. VIDEO 2Vpp.

OUTPUT:

DIFF. GAIN: <0.05 %
DIFF. PHASE: <0.13 Deg.

K-FACTOR: <0.2%

DIMENSIONS 11.7cm x 6cm x 3.2cm (4.6" x

(W,D,H): 2.4" x 1.3")

WEIGHT: 0.28 kg (0.62 lbs.) Approx.

POWER SOURCE: 12VDC, 50mA ACCESSORIES: Power supply.

OPTIONS: RK-SM rack adapter