




VM-4HDMI

1:4 HDMI Distribution Amplifier



The **VM-4HDMI** is a distribution amplifier for HDMI signals. It reclocks and equalizes the signal and distributes it to four identical outputs.

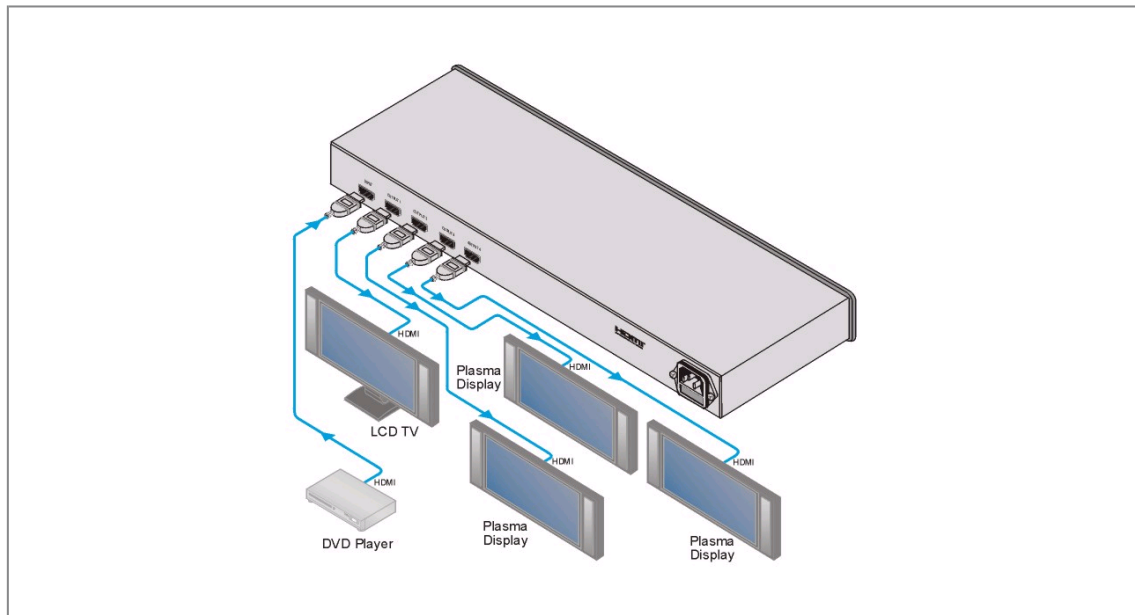



VM-4HDMI

FEATURES

- MaxData Rate - 1.65Gbps.
- HDTV Compatible.
- HDCP Compliant
- Kramer Equalization & re-Klocking Technology - Rebuilds the digital signal to travel longer distances.
- Enhanced EDID (Extended Display Identification Data) - The unit can store and recall a default EDID setting in non-volatile memory from the output allowing convenient and reliable connection to the source.
- Active Input & Output LED Indicators
- Worldwide Power Supply - 100-264V AC
- Standard 19" Rack Mount Size - 1U

TECHNICAL SPECIFICATIONS

INPUT:	HDMI Connector
OUTPUTS:	4 HDMI Connectors
BANDWIDTH:	Supports up to 1.65Gbps bandwidth per graphic channel
COMPLIANCE WITH HDMI STANDARD:	Supports HDMI 1.0 and HDCP
CONTROLS:	SELECT and READ buttons for selecting and storing EDID information
INDICATOR LEDs:	OUTPUTS 1 to 4, and ACTIVE LED
POWER SOURCE:	100-264 VAC
DIMENSIONS:	19-inch (W), 7-inch (D), 1U (H)
WEIGHT:	2.5 kg. (5.5 lbs.) approx.
ACCESSORIES:	Power cord.
OPTIONS:	HDMI/HDMI male-to-male cables