




VM-80A

1:8 Audio Distribution Amplifier



The Kramer **VM-80A** is a high performance distribution amplifier for balanced stereo audio signals. It can be configured as two 1:4 DAs.

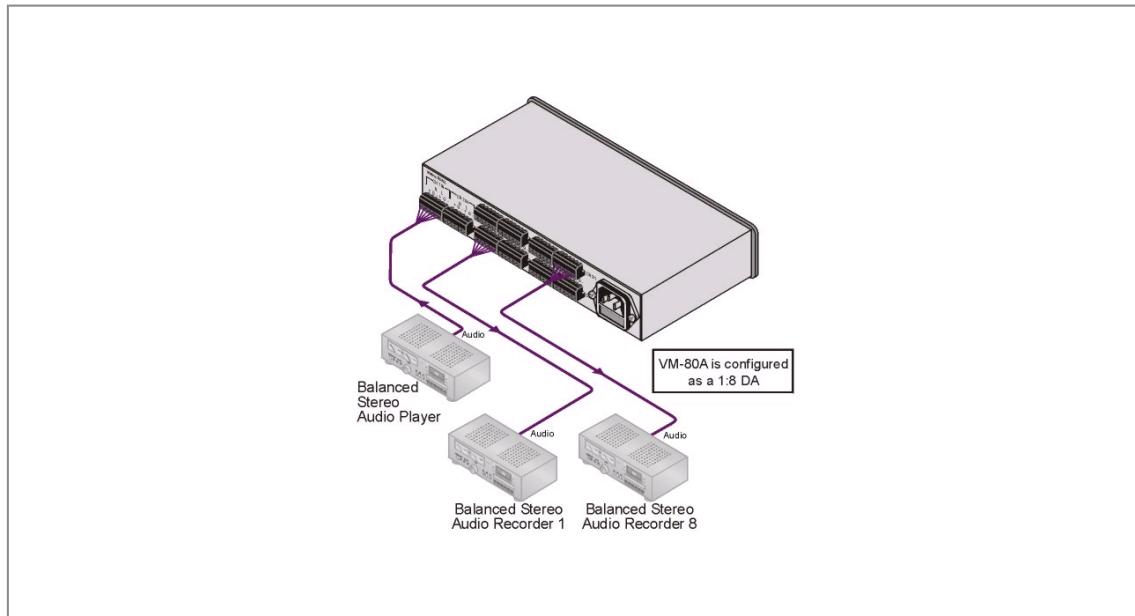



VM-80A

FEATURES

- **Dual Mode** - Configure as either a 1:8 or (2) 1:4 DAs.
- **S/N Ratio** - 100dB (1V).
- **Grouped Audio Level (Gain) Controls.**
- **Desktop Size** - Compact size. Two units can berack mounted side-by-side in a 1U rack space with the optional RK-80 adapter.

TECHNICAL SPECIFICATIONS

INPUTS:	2 balanced audio stereo +4dBm, 100 k Ω on terminal block connectors.
OUTPUTS:	2 x4 balanced audio stereo, +4dBm, 50W on terminal block connectors.
AUDIO BANDWIDTH:	20 kHz. -1dB.
CROSSTALK:	-60dB.
COUPLING:	AC.
THD+NOISE:	Less than 0.02%
S/N RATIO:	100dB/1V
MAX. AUDIO OUTPUT:	20 Vpp.
POWER SOURCE:	230 VAC, 50/60 Hz (115VAC U.S.A.) 6.7 VA.
DIMENSIONS:	22cm X 18cm X4.5cm (8.7" x 7" x 1.8", W, D, H., half 19").
WEIGHT:	1.2 kg. (2.7 lbs.) Approx.
ACCESSORIES:	Detachable AC power cord.
OPTIONS:	RK-80 rack kit