


2001 02 15 10:00:00 AM



The Kramer **VP-12x8** is a high performance matrix switcher for computer graphics video signals. It can simultaneously route any or all inputs to any or all outputs.

- High Bandwidth - 380MHz (- 3dB).
- HDTV compatible.
- Memory Locations - Store multiple switches as presets to be recalled and executed when needed.
- Take Button - Execute multiple switches all at once.
- Front panel lock.
- Control - RS-232 with looping (K-Router™ Windows® - based software is included), Ethernet & IR Remote (included).
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

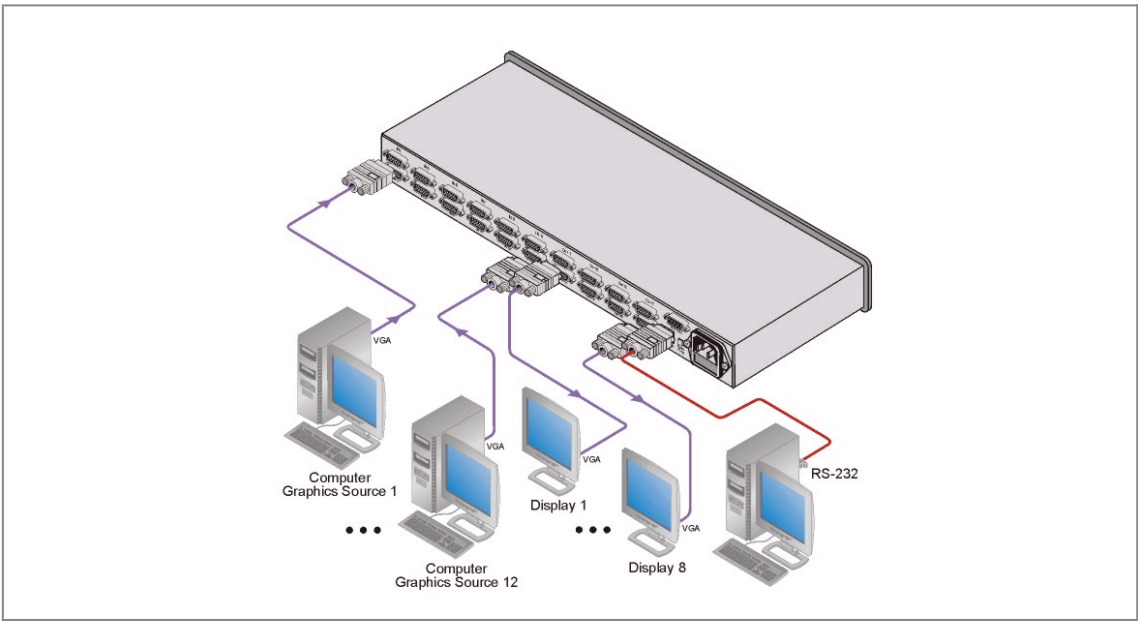

switches as presets to be recalled and executed when needed. Take Button - Execute multiple switches all at once. Front panel lock. Control - RS-232 with looping (K-Router™ Windows® - based software is included), Ethernet & IR Remote (included). Worldwide Power Supply - 100-240V AC. Standard 19" Rack Mount Size - 1U. Rack "ears" included.

- **OUTPUTS:** - 8 VGA on 15-Pin HD connectors (VGA through UXGA).
- **MAX. OUTPUT LEVEL:** - 2Vpp.
- **BANDWIDTH (-3dB):** - 300MHz.
- **DIFF. GAIN:** - 0.06%.
- **DIFF. PHASE:** - 0.03°.
- **K-FACTOR:** - <0.05%.
- **INPUTS:** - 12 XGA on 15-Pin HD connectors (VGA through UXGA).

CROSSTALK (all -49dB @5MHz. hostile):
COUPLING: DC.
POWER SOURCE: 100-264VAC, 50/60 Hz; 12VA.
DIMENSIONS: 19 inch (W), 7 inch (D), 1U (H) rack mountable.
WEIGHT: 2.7kg (6lbs.) approx.
ACCESSORIES: Power cord, Null modem adapter, Windows®-based Kramer control software, Infrared remote control transmitter.

S/N RATIO: 60dB @5MHz.
CROSSTALK (all -49dB @5MHz. hostile):
COUPLING: DC.
POWER SOURCE: 100-240V AC, 50/60Hz, 30VA.
DIMENSIONS: 19" x 7" x 1U W, D, H, rack mountable.
WEIGHT: 2.7kg (6lbs) approx.
ACCESSORIES: Power cord, null-modem adapter, Windows®-based Kramer control software, infrared remote control transmitter.