




VP-222K

2x1:2 Computer Graphics Video Switcher



The **VP-222K** is a high-performance switcher for computer graphics video signals with resolutions up to and exceeding UXGA. It switches one of two inputs to two identical outputs.

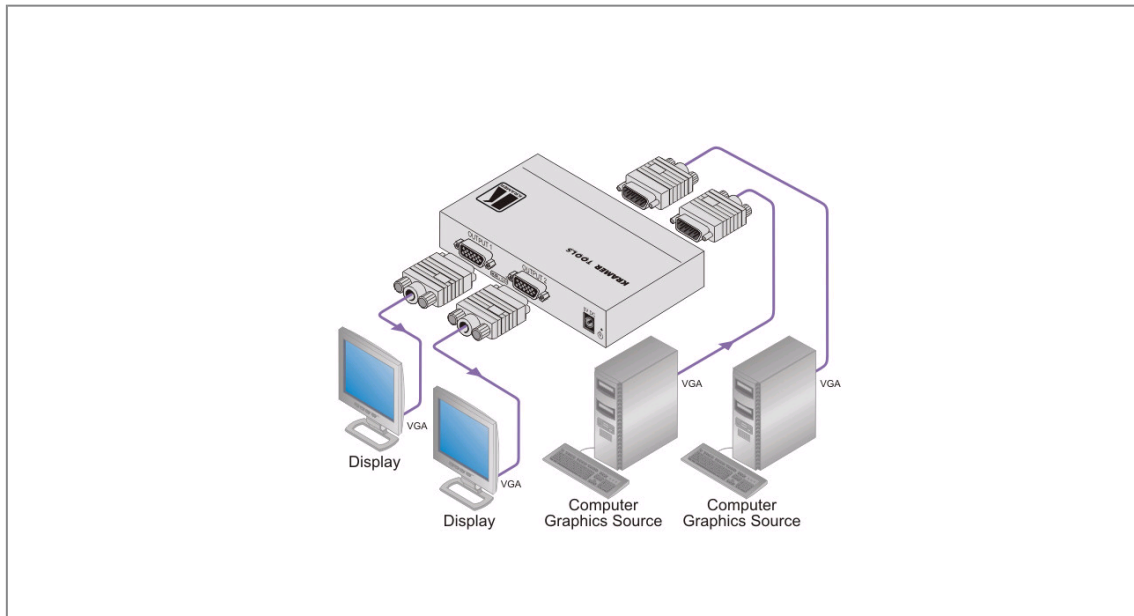



VP-222K

FEATURES

- **High Bandwidth** - 415MHz.
- **KR-ISP™ Advanced Sync Processing**
Ensures compatibility with a wide range of computers (even if the sync level is too low) by restoring the sync signal waveform. KR-ISP advanced sync processing can be enabled or disabled.
- **Compact Kramer TOOLS™3** units can be rack mounted side-by-side in a 1U rack space with the optional RK-3TR rack adapter.

TECHNICAL SPECIFICATIONS

INPUTS:	2 UXGA on 15-pin HD connectors.
OUTPUTS:	2 UXGA on 15-pin HD connectors.
VIDEO BANDWIDTH (-3dB):	415MHz.
DIFF. GAIN:	<0.02%.
DIFF. PHASE:	<0.02Deg.
VIDEO S/N RATIO:	73dB.
K-FACTOR:	<0.05%.
CROSSTALK:	-58dB @5MHz.
DIMENSIONS:	12cm x 7.0cm x 2.5cm (4.7" x 2.8" x 1.0") W, D, H.
POWER SOURCE:	5V DC, 115mA.
WEIGHT:	0.26kg (0.58lbs) approx.
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	RK-3T 19" rack adapter.