


The **VS-121HC** is a multi-format switcher and transcoder. The unit switches and transcodes one of four composite video or one of four s-Video signals to two identical component video outputs or the unit switches one of four component video input signals to the two identical component video outputs.

- Bandwidth - 350MHz (-3dB) (Component Video).
- Inputs - 4 composite (RCA connectors), 4 s-Video (4-pin connectors), and 4 component (RCA connectors).
- Format Conversion - Transcodes composite video & s-Video to component video and passes the component video signals.
- Outputs - 2 Component (RCA connectors).
- Control - Front panel, RS-232 (K-Router™ Windows® - based software is included) & RS-485, Ethernet & IR remote (Included).
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.



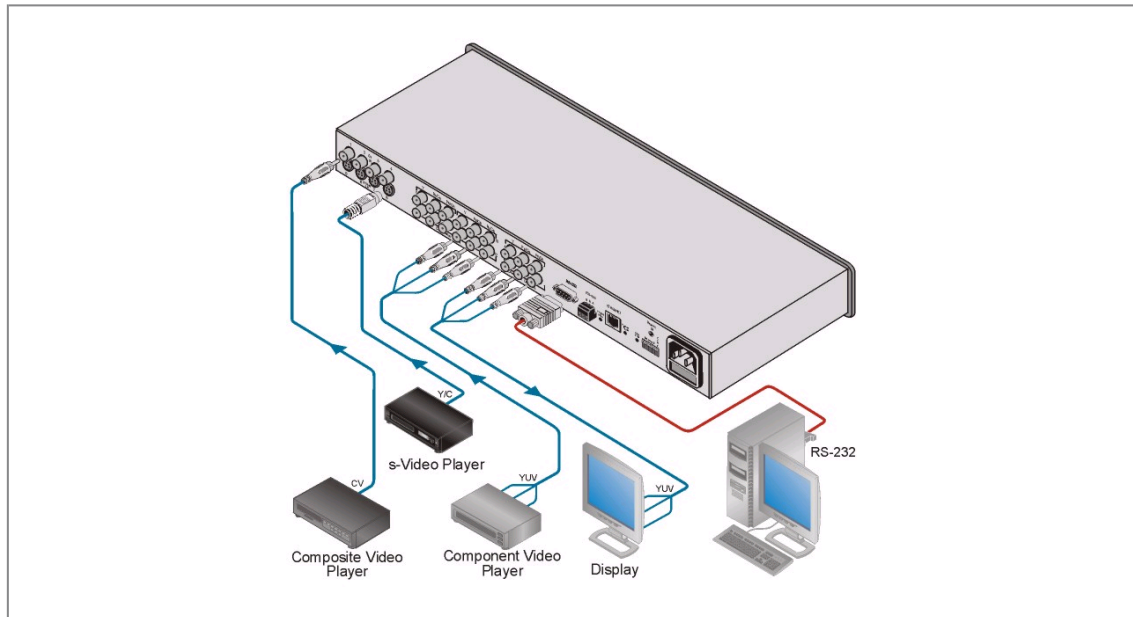

connectors), 4 s-Video (4-pin connectors), and 4 component (RCA connectors).Format Conversion - Transcodes composite video & s-Video to component video and passes the component video signals.Outputs - 2 Component (RCA connectors).Control - Front panel, RS-232 (K-Router™ Windows® - based software is included) & RS- 485, Ethernet & IR remote (Included).Standard 19" Rack Mount Size - 1U. Rack "ears" included.

- **HDTV Compatible.**
- **INPUTS:** - 4 composite video (1Vpp/75Ω) on RCA connectors 4 s-Video 1 Vpp (Y), 0.3Vpp (C) / 75Ω on 4p connectors 4 component video (1Vpp/75Ω) on RCA connectors
- **OUTPUTS:** - 2 component video (1Vpp/75) on RCA connectors
- **MAX. OUTPUT LEVEL:** - VIDEO: 2.1Vpp; XGA: 0.77Vpp AUDIO: 27Vpp
- **BANDWIDTH (-3dB):** - VIDEO: VGA / UXGA: 400MHz;
- **s-Video (Y):** - 310MHz;

HDTV compatible 40kHz

AUDIO:

DIFF. GAIN: <0.07% all channels

DIFF. PHASE: <0.05 Deg. all channels

S/N RATIO: VIDEO: 75dB all channels
AUDIO: 75dB /1Vpp all channels

CONTROLS: 12 selector buttons, lock button, RS-232, RS-485, Ethernet, IR

POWER SOURCE: 100-240V AC, 50/60Hz, (115V AC, U.S.A.) 7VA

DIMENSIONS: 19-inch (W), 7-inch (D) 1U (H) rack-mountable

WEIGHT: 2.6kg (8lbs.) approx

ACCESSORIES: Power cord, Null modem adapter, rack ears, RC-IR2 remote control transmitter, Windows®-based Kramer control software

WEIGHT: 2.6kg (8lbs) approx.

ACCESSORIES: Power cord, null-modem adapter, rack ears, RC-IR2 remote control transmitter, Windows®-based Kramer control software.