




VS-201YC

2x1 s-Video Switcher



The **VS-201YC** is a high-quality switcher for s-Video signals. It switches one of two signals to a single output.

- Bandwidth - 500MHz (-3dB).
- Control - Input Selector or RS-232 (K-Router™ Windows®-based software is included).
- Kramer TOOLS™3 units can be rack mounted side-by-side in a 1U rack space.

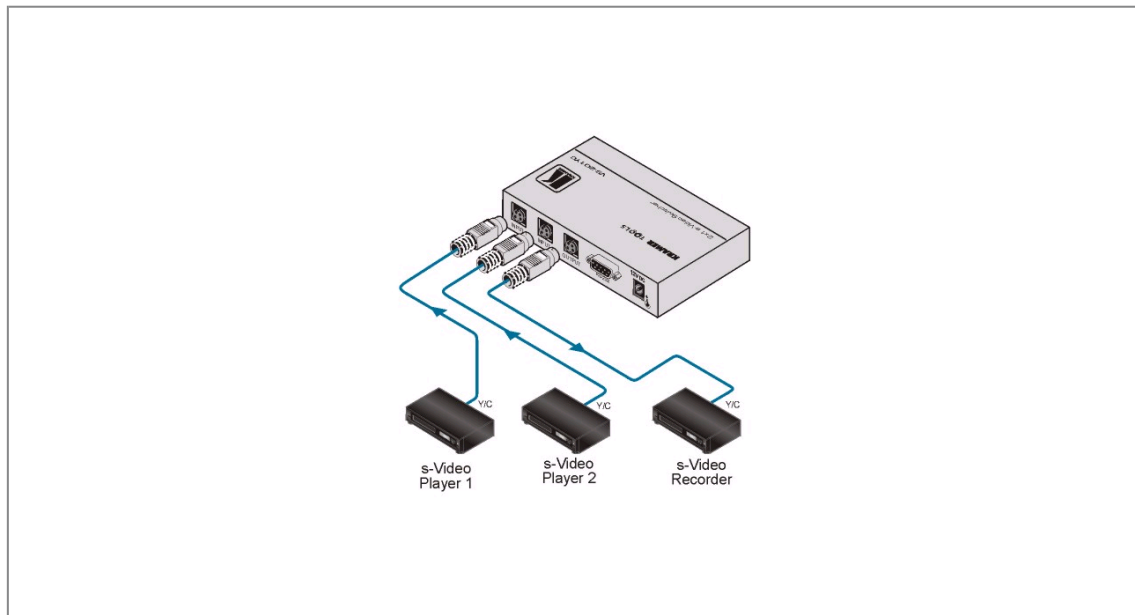



VS-201YC

FEATURES

- **Bandwidth** - 500MHz (-3dB).Control - Input Selector or RS-232 (K-Router™ Windows-based software is included).Kramer TOOLS - 3 units can be rack mounted side-by-side in a 1U rack space.
- **INPUTS:** - 2 YC, 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on 4p connectors.
- **OUTPUT:** - 1 YC 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on an 4p connector.

TECHNICAL SPECIFICATIONS

MAX. OUTPUT LEVEL:	2.4Vpp
BANDWIDTH (-3dB):	520MHz
DIFF. GAIN:	0.03%
DIFF. PHASE:	0.02 Deg.
K-FACTOR:	<0.05%
S/N RATIO:	78dB
CROSSTALK (all hostile):	-53dB
COUPLING:	DC
POWER SOURCE:	12V, 110mA
CONTROL:	2 front panel switches, RS-232.
DIMENSIONS:	12cm x 7.15cm x 2.76cm (4.7" x 2.8" x 1.08"), W, D, H
WEIGHT:	0.3 kg. (0.67 lbs.) approx.
ACCESSORIES:	Power supply, mounting bracket
OPTIONS:	Rack Adapter models: RK-1T2PT, RK-2T1PT, and/or RK-3T
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	RK-3T 19" rack adapter.