




VS-202YC

2X1:2 S-VIDEO SWITCHER & DISTRIBUTION AMPLIFIER.



The **VS-202YC** is a high quality switcher and distribution amplifier for s-Video signals. It switches one of two inputs to two identical outputs.

- Bandwidth - 520MHz (-3dB).
- Control - Input Selector or RS-232 (K-Router™ Windows®-based software is included).
- Compact Kramer TOOLS™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack.

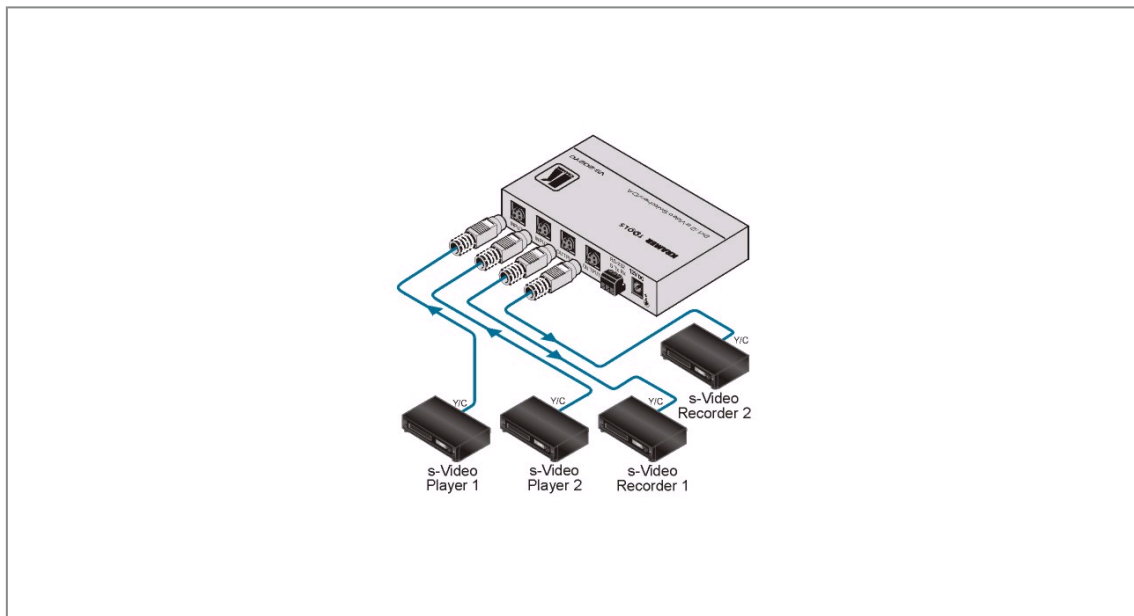



VS-202YC

FEATURES

- **Bandwidth** - 520MHz (-3dB). Control - Input Selector or RS-232 (K-Router™ Windows-based software is included). Compact Kramer TOOLS™ 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack.
- **INPUTS:** - 2 YC 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on 4p connectors.
- **OUTPUT:** - 2 YC 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on 4p connectors.

TECHNICAL SPECIFICATIONS

MAX. OUTPUT LEVEL:	2.4Vpp.
BANDWIDTH (-3dB):	520MHz.
DIFF. GAIN:	0.03%.
DIFF. PHASE:	0.02°.
K-FACTOR:	<0.05%.
S/N RATIO:	78dB.
CROSSTALK (all hostile):	-53dB.
COUPLING:	DC.
POWER SOURCE:	12V, 110mA.
CONTROL:	2 front panel switches, RS-232.
DIMENSIONS:	12cm x 7.15cm x 2.76cm (4.7" x 2.8" x 1.08") W, D, H.
WEIGHT:	0.3 kg. (0.67 lbs.) approx.
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	Rack Adapter models: RK-1T2PT, RK-2T1PT, and/or RK-3T.
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	RK-3T 19" rack adapter.