




VS-311HDMI

3x1 HDMI, Stereo & S/PDIF Audio Standby Switcher



The **VS-311HDMI** is a high performance switcher for HDMI video and balanced, unbalanced and S/PDIF audio signals. When configured as a standby switcher, it will switch to a selectable secondary input upon loss of the primary input.

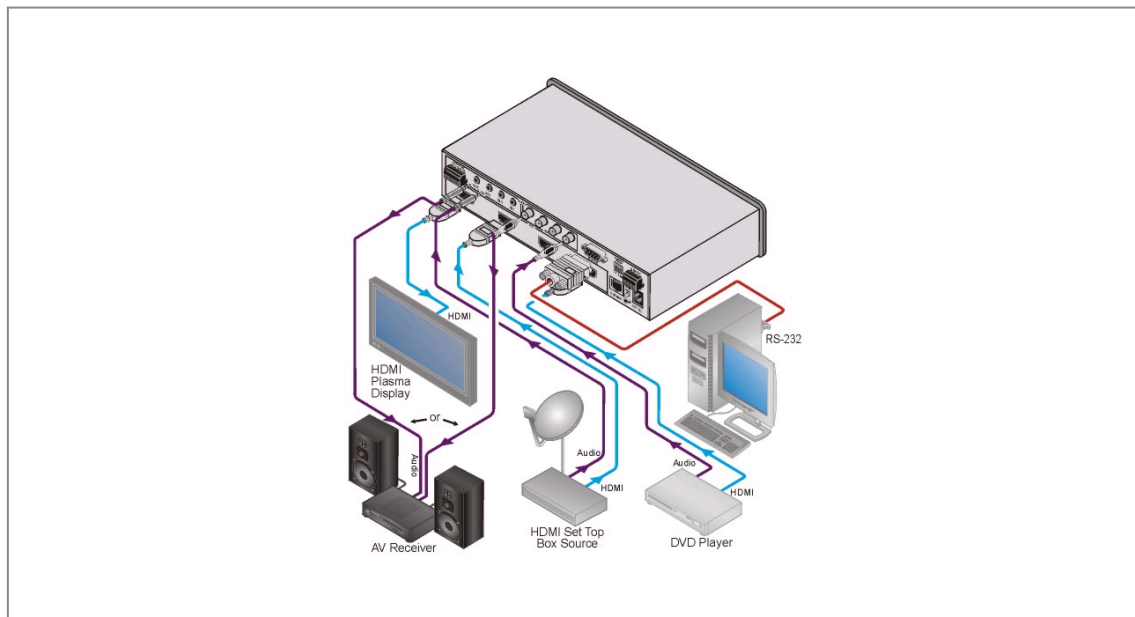



VS-311HDMI

FEATURES

- Max Data Rate - Up to 1.65 Gbps.
- HDTV Compatible.
- HDCP Compliant.
- Flexible Control Options - Automatic (standby), RS-232, Ethernet or contact closure.
- Automatic Standby Switching - It will switch to a secondary input when the primary input signal is interrupted and switch back to the primary input when detected.
- Input Priority - Selectable via dip switches

TECHNICAL SPECIFICATIONS

Desktop Size	Compact size. Two units can be rack mounted side-by-side in a 1U rack space with the optional RK-1 adapter.
INPUTS:	3 HDMI connectors 3 S/PDIF digital audio on RCA connectors 3 unbalanced stereo audio +4dBm on 3.5mm mini jacks
OUTPUT:	1 HDMI connector 1 S/PDIF digital audio on an RCA connector 1 unbalanced stereo audio + 4dBm on a 3.5mm mini jack, with 1 balanced stereo audio on a 5-pin detachable terminal block
DATA RATE:	Up to 1.65Gbps
POWER SOURCE:	12 VDC, 270mA
CONTROLS:	Front panel buttons, infra-red remote control transmitter, RS-232, Ethernet
DIMENSIONS:	21.6cm x 16.1cm x 4.4cm (8.5" x 6.3" x 1.7", W, D, H)
WEIGHT:	1.2 kg. (2.6 lbs.) approx.
ACCESSORIES:	Power supply