

The **VS-3232V** is a high performance 32x32 full matrix switcher for composite video signals. An extremely wide bandwidth, multiple set of interfaces and special modes of work make it useful as a part of 32 x 32 Y/C and component video switchers as well as multi-signal video-audio control system.

Bandwidth - 300MHz (- 3dB) fully loaded.

Flexible GENLOCK switching options.

Flexible Control Options -

Front panel. Remote control via RS-232 (K-Router™ Windows® - based software is included), RS-485, Ethernet and IR remote (included).

Firmware - Easy upgrading via the Ethernet.

Memory Locations - Store 59 switches as presets to be recalled and executed when needed.

UNITY setting - Fast accessibility to a preprogrammed default setup.


Communication Protocols - The Kramer 2000 and the Sierra ASCII.

Worldwide Power Supply - 100-240V AC.

Standard 19" Rack Mount

Size - 2U.Rack "ears" included.



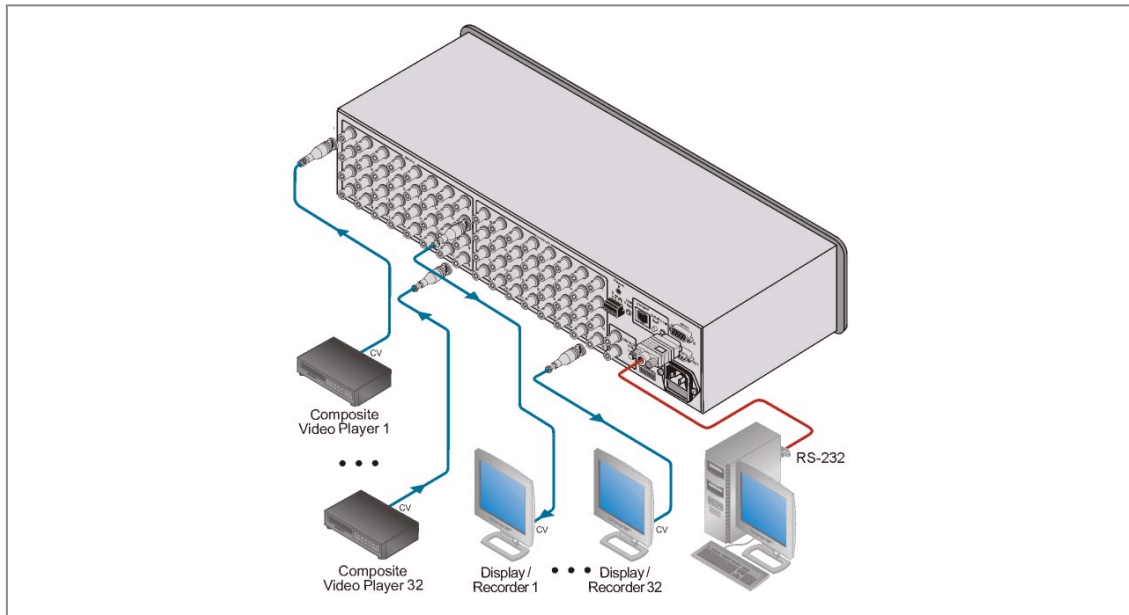

- **OUTPUTS:** - 32 composite video, 1Vpp / 75Ω on BNC connectors
- **VIDEO BANDWIDTH:** - >300MHz, -3dB / >50MHz, 0.1dB
- **ALL HOSTILE CROSSTALK:** - <-49dB @5MHz
- **NON LINEARITY** <0.2%
- **VIDEO S/N:** - 70dB unweighted / 78dB @5MHz weighted
- **AC Coupling**
- **DIFF. GAIN:** - <0.15%
- **DIFF. PHASE:** - <0.08 Deg.

CONTROL: 19 pushbutton switches, RS-232, RS-485, IR remote, Ethernet

SWITCHING: 3 modes for Vertical interval switching and Immediate switching

DIMENSIONS: 19-inch (W), 7-inch (D) 2U (H) rack-mountable
POWER SOURCE: 230 VAC, 50/60Hz, (115VAC, U.S.A.) 10VA

WEIGHT: 3.5kg (7.8 lbs.) approx

ACCESSORIES: Power cord, Null modem adapter, Windows®-based Kramer control software, Windows®-based Ethernet Configuration Manager and Virtual Serial Port Manager, Infra-red remote control transmitter

POWER SOURCE: 230 VAC, 50/60Hz, (115VAC, U.S.A.) 10VA

NON-LINEARITY: <0.2%.

K-FACTOR: <0.05%.

COUPLING: AC

CONTROL: 19 pushbutton switches; RS-232, RS-485, IR remote, Ethernet.

SWITCHING: 3 modes for vertical interval switching and immediate switching.

POWER SOURCE: 230V AC, 50/60Hz, (115V AC, U.S.A.) 10VA.

DIMENSIONS: 19" x 7" x 1U W, D, H, rack mountable.

WEIGHT: 3.5kg (7.8lbs) approx.

ACCESSORIES: Power cord, null-modem adapter, Windows®-based Kramer control software, Windows®-based Ethernet Configuration Manager and Virtual Serial Port Manager, Infrared remote control transmitter.