




VS-33V

3x1 Vertical Interval Video Switcher



The **VS-33V** is a high performance switcher for composite video signals. Switching during the vertical interval ensures glitch-free switching with genlocked sources.

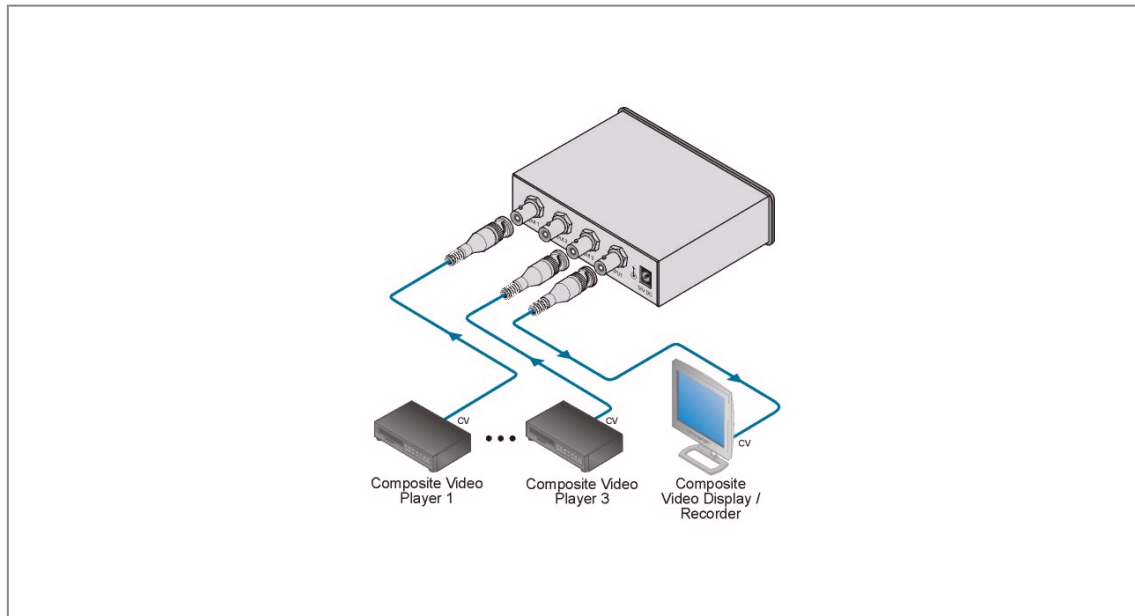



VS-33V

FEATURES

- **Bandwidth** - 46MHz (- 3dB).
- **Vertical Interval Switching.**
- **Desktop Size** - Compact size. Three units can be rack mounted side-by-side in a 2U rack space with the optional RK-SM adapter.

TECHNICAL SPECIFICATIONS

INPUTS:	3 Composite Video 1Vpp/75 Ω on BNC type connectors.
OUTPUT:	1 Composite Video, 1 Vpp/75 Ω on a BNC type connector.
DIFF. GAIN:	0.58%.
DIFF. PHASE:	0.44 Deg.
K-FACTOR:	<0.05%.
MAX. VIDEO OUTPUT:	1.5Vpp/ Ω .
VIDEO S/N RATIO:	75 dB.
CROSSTALK:	-50dB.
POWER SOURCE:	12VDC40mA.
DIMENSIONS:	11.7cm x 6cm x 3.2cm (4.6" x 2.4" x 1.3", W, D, H.).
WEIGHT:	0.3 kg. (0.67 lbs.) approx.
ACCESSORIES:	12VDC power supply.
OPTIONS:	Model 50P six-outlet power supply. RK-SM rack adapter
VIDEO BANDWIDTH:	46 MHz. -3dB
SWITCHING:	Vertical Interval.