




VS-4216

16 Port RS-422 Matrix Switcher



The **VS-4216** is a high performance bi-directional matrix switcher for RS-422 control signals. It can connect multiple ports to create from one to eight bi-directional communications groups.

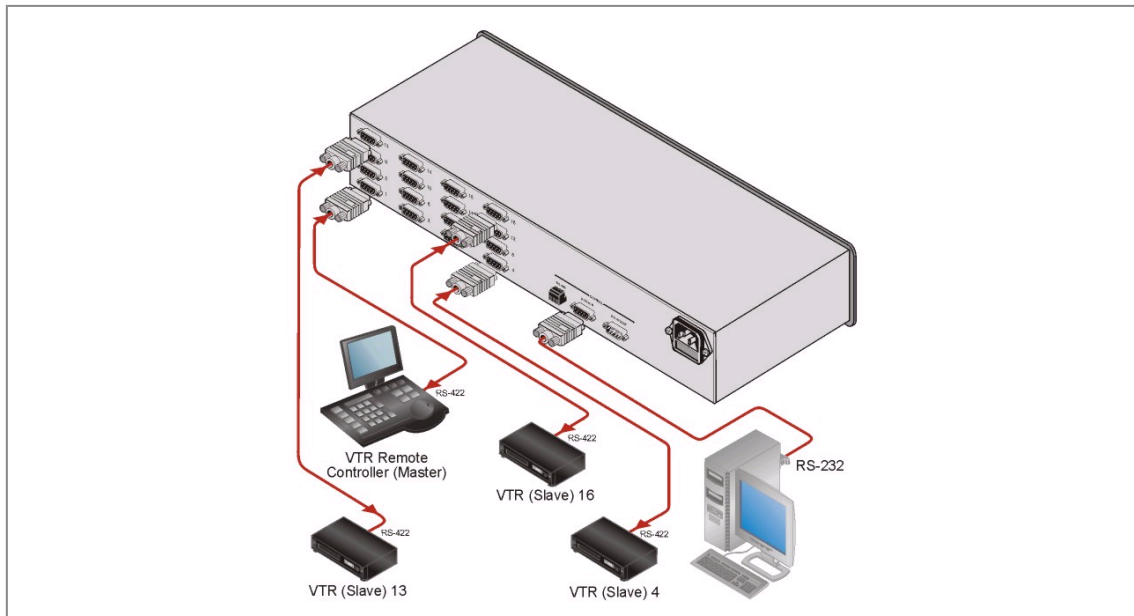



VS-4216

FEATURES

- **Control** - Front panel, RS-232 (K-Router™ Windows - based software is included), & RS-485.
- **Memory Locations** - Store multiple switches as presets to be recalled and executed when needed.
- **Standard 19" Rack Mount Size** - 2U.

TECHNICAL SPECIFICATIONS

INPUTS/OUTPUTS: 16 in/out ports on DB-9 female connectors, fully compliant to TIA/EIA-422-B standard. RS-232 control via DB-9 female connector (RS-232 out on DB-9 male connector), RS-485 on terminal block assembly.

CONTROLS: Manual with pushbuttons on front panel, RS-485 and RS-232 PC interface.

DIMENSIONS: 19-inch (W), 7-inch (D) 1U (H) rack mountable.

POWER SOURCE: 230VAC, 50/60 Hz, (115V U.S.A.) 15 VA.

WEIGHT: 3.5 kg (7.8 lbs.) approx.

ACCESSORIES: Power cord, Windows 95/98 control software, Null-modem adapter.