




VS-4228

8 Port RS-422 Matrix Switcher



The **VS-4228** is a high performance bi-directional matrix switcher for RS-422 control signals. It can connect multiple ports to create from one to four bi-directional communications groups.

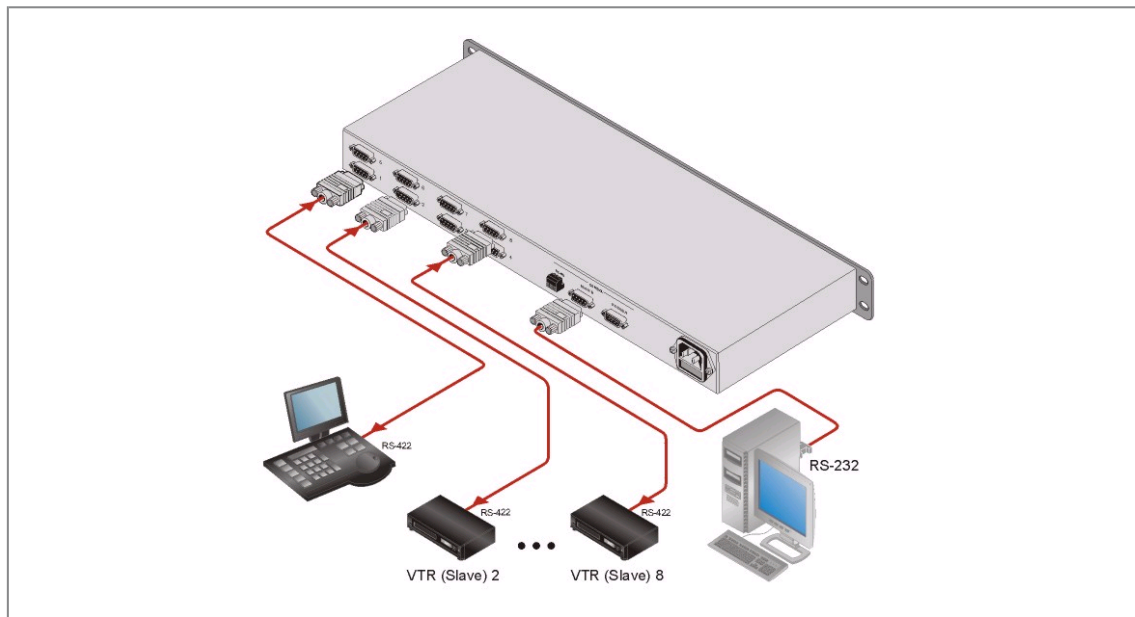



VS-4228

FEATURES

- **Control** - Front panel, RS-232 (K-Router™ Windows - based software is included), & RS-485.
- **Memory Locations** - Store multiple switches as presets to be recalled and executed when needed.
- **Front Panel Control Lockout.**
- **Standard 19" Rack Mount Size - 1U.**

TECHNICAL SPECIFICATIONS

INPUTS/OUTPUTS: 8 in/out ports on DB-9 female connectors, fully compliant to TIA/EIA-422-B standard. RS-232 control via DB-9 female connector (RS-232 out on DB-9 male connector, RS-485 on terminal block assembly).

CONTROLS: Manual with pushbuttons on front panel, RS-485 and RS-232 serial interface.

DIMENSIONS: 19-inch (W), 7-inch (D) 1U (H) rack mountable.

POWER SOURCE: 230VAC, 50/60 Hz, (115V U.S.A.) 10 VA.

WEIGHT: 2.2 kg (4.88 lbs. approx.).

ACCESSORIES: Power cord, Windows 95/98 control program.