




VS-42HDMI

4x2 HDMI Matrix Switcher



The **VS-42HDMI** is a high quality 4x2 matrix switcher for HDMI signals. It reclocks and equalizes the signal and can route any or all inputs to any or all outputs simultaneously.

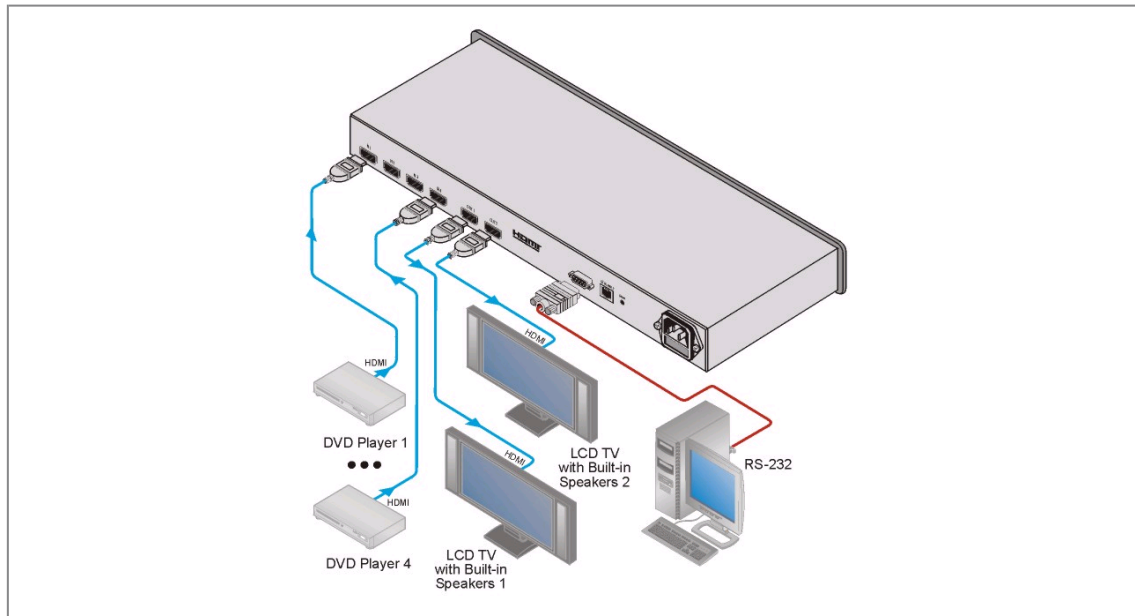



VS-42HDMI

FEATURES

- Maximum Data Rate - 1.65Gbps
- Kramer re-Klocking & Equalization Technology - Rebuilds the digital signal to travel longer distances.
- HDCP Compliant.
- HDTV Compatible.
- Enhanced EDID (Extended Display Identification Data) - Can capture an EDID setting from a device connected to the output and store it in a non-volatile memory. The user can recall this setting or a factory default EDID.
- Flexible Control Options - Front panel, IR Remote, RS-232 (K Router™ Windows®-based software is included) & Ethernet (Windows®-based Ethernet Configuration Manager & Virtual Serial Port Manager is included).
- Includes two OFF buttons to disconnect each output.
- Front Panel Lockout.
- Worldwide Power Supply - 90-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

TECHNICAL SPECIFICATIONS

INPUTS:	4 HDMI Connectors
OUTPUTS:	2 HDMI Connectors
BANDWIDTH:	Supports up to 1.65Gbps bandwidth per graphic channel
STANDARDS:	COMPLIANCE WITH HDMI STANDARD: Supports HDMI 1.1 and HDCP
RESOLUTION:	Up to UXGA; 1080p
POWER SOURCE:	100-240V AC; 50/60Hz, 10VA
CONTROLS:	Front panel buttons, Infra-red remote control transmitter, RS-232, Ethernet
DIMENSIONS:	19-inch (W), 7-inch (D), 1U (H)
WEIGHT:	2.5 kg. (5.5 lbs.) approx.
ACCESSORIES:	Power cord, IR transmitter
OPTIONS:	Kramer HDMI cables. For best results, use Kramer cables such as the C-HDMI/HDMI series, the C-HDMI-DVI series and/or our HDMI over fiber optics C-FOHM/FOHM series.