


The **VS-44HDMI** is a high-performance matrix switcher for HDMI signals. It reclocks and equalizes the signal and can route any input to any or all outputs simultaneously.

- Max Data Rate - 1.65Gbps.
- HDTV Compatible.
- HDCP Compliant.
- Kramer re-Klocking™ & Equalization Technology - Rebuilds the digital signal integrity to travel longer distances.
- Enhanced EDID (Extended Display Identification Data) - Captures an EDID setting from a device connected to the output and stores it in a non-volatile memory. The user can recall this setting or a factory default EDID.
- Flexible Control Options - Front panel, IR Remote, RS-232 (K-Router™ Windows®-based software is included) & Ethernet (Windows®-based Ethernet Configuration Manager & Virtual Serial Port Manager is included).
- Output Disconnect - Each output.
- Front Panel Lockout.
- Memory Locations - Store multiple switches as presets to be recalled and executed when needed.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.



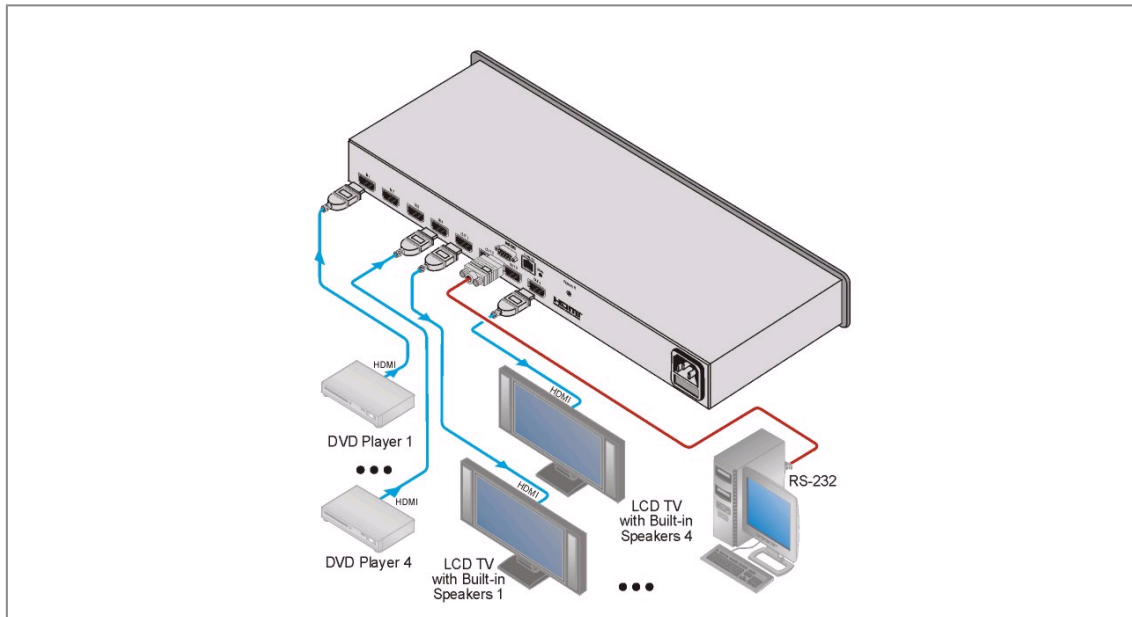

- **Frame Locking & Equalization Technology** - Rebuilds the digital signal integrity to travel longer distances.
- **HDCP Compliant.**
- **HDTV Compatible.**
- **Enhanced EDID (Extended Display Identification Data)** - Captures an EDID setting from a device connected to the output and stores it in a non-volatile memory. The user can recall this setting or a factory default EDID.
- **Flexible Control Options** - Front panel, IR Remote, RS-232 (K-Router™ Windows®-based software is included) & Ethernet (Windows®-based Ethernet Configuration Manager & Virtual Serial Port Manager is included).
- **Output Disconnect** - Each output.
- **Front Panel Lockout.**
- **Memory Locations** - Store multiple switches as presets to be recalled and executed when needed.
- **Worldwide Power Supply** - 100-240V AC.

<b>INPUTS:</b>	4 HDMI connectors
<b>OUTPUTS:</b>	4 HDMI connectors
<b>BANDWIDTH:</b>	Supports up to 1.65Gbps bandwidth per graphic channel
<b>COMPLIANCE WITH HDMI STANDARD:</b>	Supports HDMI 1.1 and HDCP
<b>MAX RESOLUTION:</b>	Up to UXGA; 1080p, 1920 x 1200
<b>POWER SOURCE:</b>	100-240V AC; 50/60Hz, 28VA
<b>CONTROLS:</b>	Front panel buttons, infrared remote control transmitter, RS-232, Ethernet
<b>DIMENSIONS:</b>	19" x 7" x 1U W, D, H
<b>WEIGHT:</b>	2.5kg (5.5lbs) approx.
<b>ACCESSORIES:</b>	Power cord, IR transmitter