


based software is included), RS-485, Ethernet, contact closure & IR Remote (included).


- Looping Analog Sync Input.
- Selectable Sync Signal Termination.
- Vertical Interval Switching - SMPTE RP-168.
- Front Panel Control Lockout.
- Worldwide Power Supply - 100-240V AC.
- Standard 19 inch Rack Mount Size - 1U. Rack "ears" included.

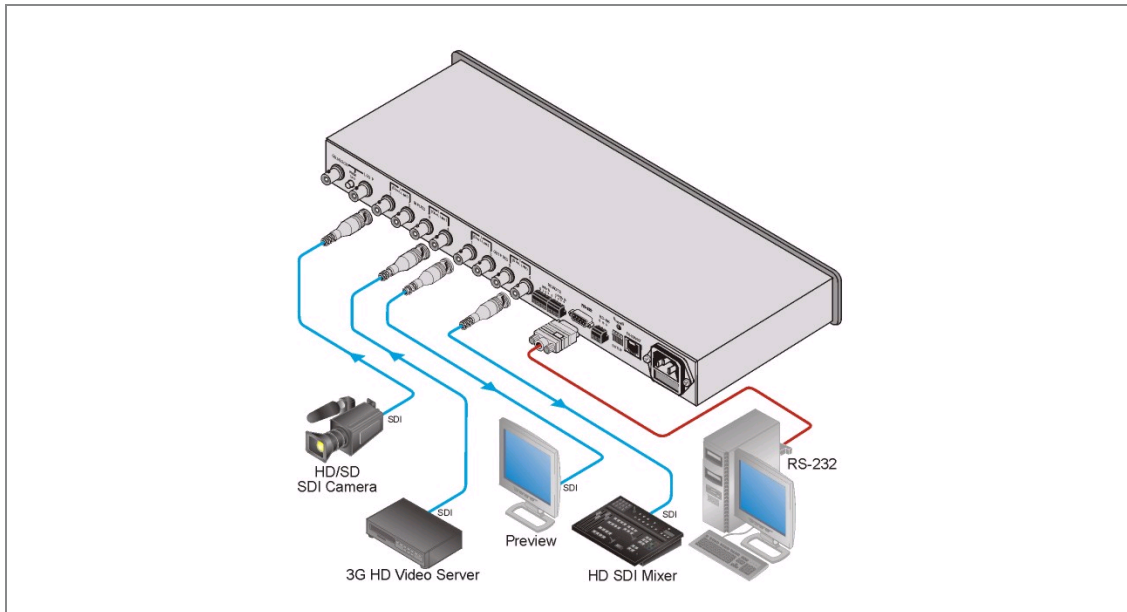

Equalization Technology - Rebuilds the digital signal to travel longer distances.

- Switching Synchronization - Synchronizes either to external reference or incoming video.
- Analog Sync Type - Bi-level, tri-level.
- Active Input Type™ Reporting - Each input button on the front panel automatically lights up when the unit detects a video signal on that input. Green indicates a standard definition (SDI) input signal and blue indicates a high-definition (HD-SDI) input signal.
- Multiple Memory Locations - Stores multiple switches as presets (salvos) to be recalled and executed when needed.
- Take Button - Executes multiple switches all at once.
- Flexible Control Options - Front Panel, RS-232 (K-Router™ Window®

- based software is included), RS-485, Ethernet, contact closure & IR Remote (included).
- Looping Analog Sync Input.
 - Selectable Sync Signal Termination.
 - Vertical Interval Switching - SMPTE RP-168.
 - Front Panel Control Lockout.
 - Worldwide Power Supply - 100-240V AC.
 - Standard 19 inch Rack Mount Size - 1U. Rack "ears" included.

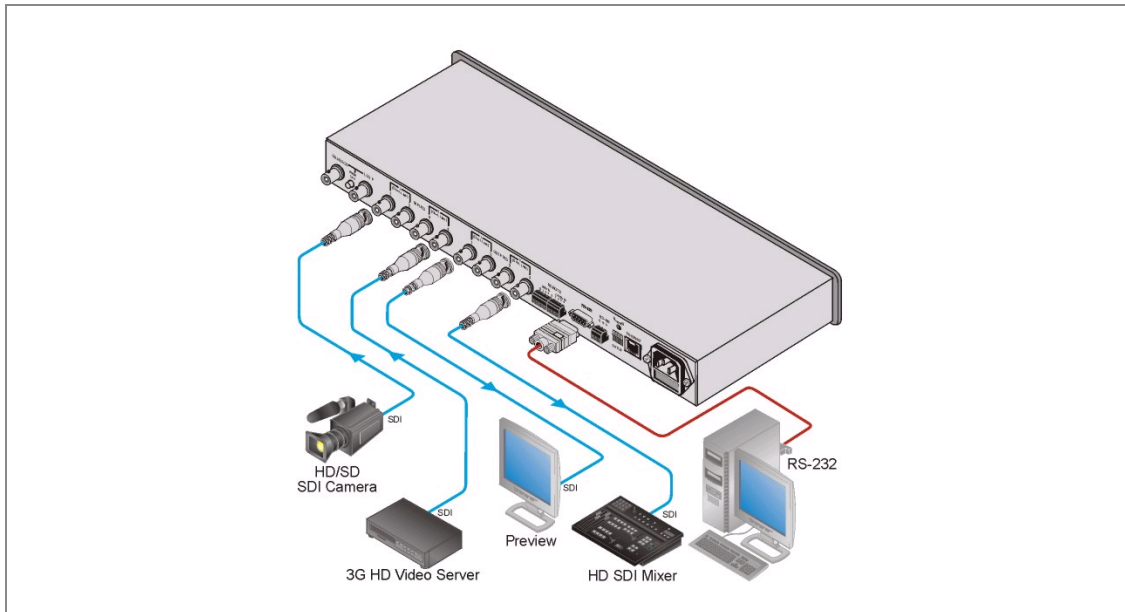

software is included), RS-485, Ethernet, contact closure & IR Remote (included). Looping Analog Sync Input. Selectable Sync Signal Termination. Vertical Interval Switching - SMPTE RP-168. Front Panel Control Lockout. Worldwide Power Supply - 100-240V AC. Standard 19 inch Rack Mount Size - 1U. Rack "ears" included.

DIMENSIONS: 19 x 7 x 1U W, D, H, rack mountable.

WEIGHT: 2.6kg (5.7lbs) approx.

ACCESSORIES: Power cord, null-modem adapter.

- **HDTV Compatible.**
- **INPUTS:** - 4 SMPTE-259M/292M/424M serial video, 75Ω on a BNC connector 1 GENLOCK 75Ω / Hi-Z on a BNC connector, hi-level or tri-level sync
- **OUTPUTS:** - 4 equalized and reclocked SMPTE-259M, 292M outputs 75Ω on BNC connectors 1 Looped GENLOCK 75Ω/Hi-Z on a BNC connector
- **MAX. OUTPUT LEVEL:** - 800mVpp/75Ω
- **DATA RATE:** - Up to 2.97Gbps
- **CONTROLS:** - Front-panel, RS-232; RS-485, ETHERNET, infra-red remote, dry contact, and panel lock
- **POWER SOURCE:** - Universal, 100-240VAC, 50/60Hz 22VA
- **DIMENSIONS:** - 19 inch (W), 7 inch (D), 1U (H) rack mountable
- **WEIGHT:** - 2.6kg (5.7lbs) approx.
- **ACCESSORIES:** - Power cord, null-modem adapter
- **Vertical Interval Switching** - SMPTE RP-168.