




VS-66FW

6 Port FireWire Switcher



The **VS-66FW** is a high performance bi-directional matrix switcher/hub for FireWire (IEEE 1394 & 1394A) signals. It can connect multiple ports to create standard branch/leaf groups.

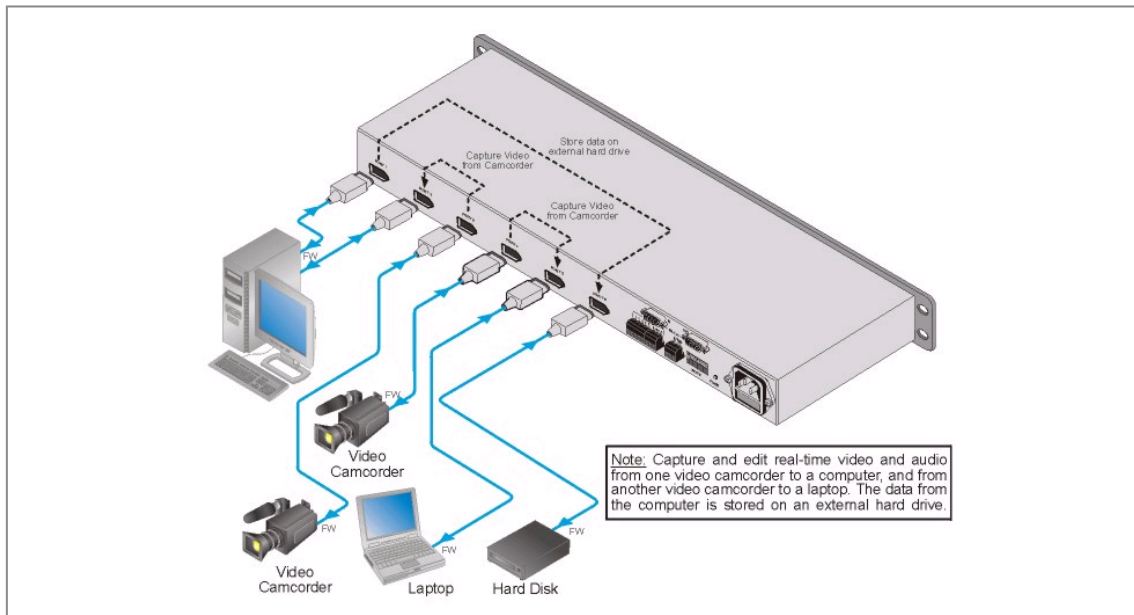



VS-66FW

FEATURES

- **Control** - Front panel, RS-232 (K-Router™ Windows® - based software is included), & RS-485, contact closure, & IR remote (Included).
- **Transfer Rates** - 100, 200, and 400Mbps.
- **Take Button** - Execute multiple switches all at once.
- **Memory Locations** - Store multiple switches as presets to be recalled and executed when needed.
- **Front Panel Control Lockout.**
- **Worldwide Power Supply** - 90-240V AC.
- **Standard 19" Rack Mount Size** - 1U.

TECHNICAL SPECIFICATIONS

- INPUTS/OUTPUTS:** 6 ports on 6 pin 1394A connectors.
- STANDARDS:** Compliant with IEEE 1394 – 1995 and 1394A-2000 standards.
- BUS TRANSFER RATE:** Up to 400Mb/s signaling rates for high performance serial bus.
- SOURCED POWER:** 12V 1.5A total for any one or all ports.
- COMPATIBILITY:** PC and MAC.
- CONTROL:** 18 front panel pushbuttons and Kramer IR remote receiver on front. RS-232 In/Out on DB-9 F/M and RS-485 on detachable terminal block.
- POWER SOURCE:** 90-240V/50-60Hz AC 30VA.
- DIMENSIONS:** 19-inch (W), 7-inch (D), 1U(H) – rack mountable.
- WEIGHT:** 2.2kg (4.9 lbs) approx.
- ACCESSORIES:** Power cord, Null-modem adapter, Windows®-based control software.