


The **VS-66HDCP** is a high-performance matrix switcher for DVI signals. The unit reclocks and equalizes the signal and can route any or all inputs to any or all outputs simultaneously.

- Max Data Rate - 1.65Gbps.
- HDTV Compatible.
- HDCP Compliant.
- Kramer re-Klocking & Equalization Technology - Rebuilds the digital signal integrity to travel longer distances.
- Smart EDID (Extended Display Identification Data) Recall - The unit can store and recall a default EDID setting in non-volatile memory from the output, allowing convenient and reliable connection to the source.
- Flexible Control Options - Front panel, IR Remote, RS-232 (K Router™ Windows®-based software is included) & Ethernet (Windows®-based Ethernet Configuration Manager & Virtual Serial Port Manager is included).
- Output Disconnect - Each output.
- Front Panel Lockout.
- Memory Locations - Stores multiple switches as presets to be recalled and executed as needed.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

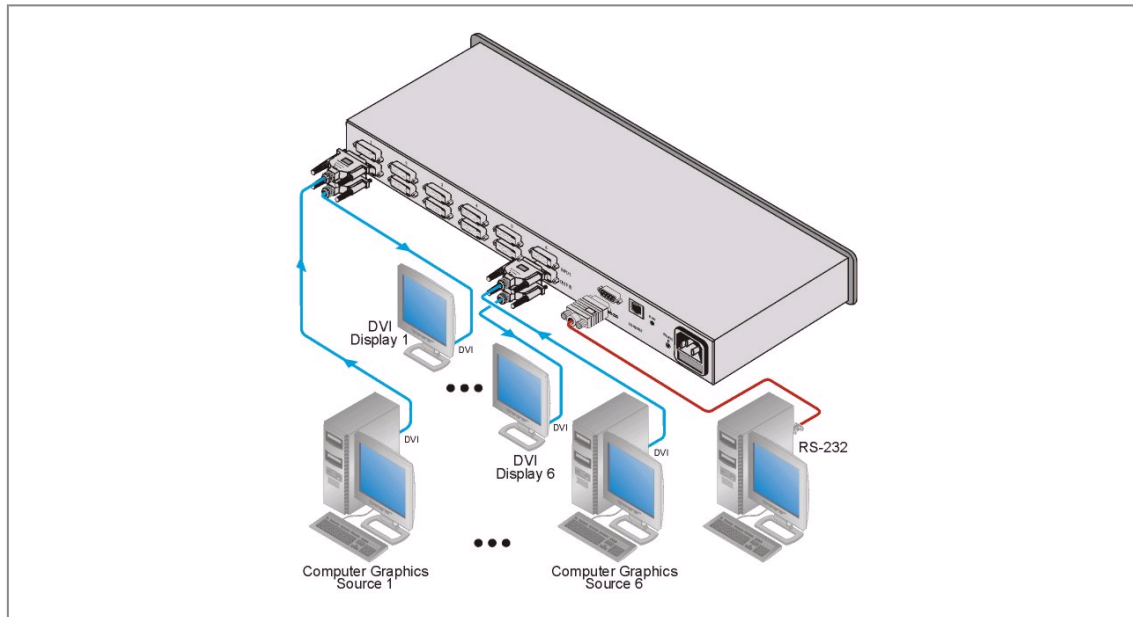

Klocking & Equalization Technology - Rebuilds the digital signal integrity to travel longer distances. Smart EDID (Extended Display Identification Data) Recall - The unit can store and recall a default EDID setting in non-volatile memory from the output, allowing convenient and reliable connection to the source. Flexible Control Options - Front panel, IR Remote, RS-232 (K Router™ Windows®-based software is included) & Ethernet (Windows®-based Ethernet Configuration Manager & Virtual Serial Port Manager is included). Output Disconnect - Each output. Front Panel Lockout. Memory Locations - Stores multiple switches as presets to be recalled and executed as needed. Worldwide Power Supply - 100-240V AC. Standard 19" Rack Mount Size - 1U. Rack "ears" included.

- **INPUTS:** - 6 DVI connectors
- **OUTPUTS:** - 6 DVI connectors
- **BANDWIDTH:** - Supports up to 1.65Gbps bandwidth per graphic channel
- **Smart EDID (Extended Display Identification Data)** - Dedicated memory for each input captures an EDID setting from a device connected to the output and stores it in non-volatile memory. The user can recall this setting or a factory default EDID.
- **STANDARDS COMPLIANCE:** - Supports DVI 1.1 and HDCP
- **MAX RESOLUTION:** - Up to UXGA; 1080p, 1920 x 1200
- **POWER SOURCE:** - 100-240V AC; 50/60Hz, 32VA
- **CONTROLS:** - Front panel buttons, infrared remote control transmitter, RS-232, Ethernet
- **DIMENSIONS:** - 19" x 7" x 1U W, D, H
- **WEIGHT:** - 2.5kg (5.5lbs) approx.

- OPTIONS:** Kramer cables
- BANDWIDTH:** Supports up to 1.65Gbps bandwidth per graphic channel.
- COMPLIANCE WITH STANDARDS:** Supports DVI and HDCP.
- MAX RESOLUTION:** Up to UXGA, 1080p, 1920x1200.
- POWER SOURCE:** 100-240V AC; 50/60Hz, 32VA.
- CONTROLS:** Front panel buttons, infra-red remote control transmitter, RS-232, Ethernet.
- DIMENSIONS:** 19" x 7" x 1U W, D, H, rack mountable.
- WEIGHT:** 2.5kg (5.5lbs) approx.
- ACCESSORIES:** Power cord, IR transmitter.
- OPTIONS:** Kramer cables.