


The **VS-66HDMI** is a high performance matrix switcher for HDMI signals. The unit reclocks and equalizes the signal and can route any or all inputs to any or all outputs simultaneously.

- Maximum Data Rate - 1.65Gbps
- HDTV Compatible.
- HDCP Compliant.
- Kramer re-Klocking & Equalization Technology - Rebuilds the digital signal integrity to travel longer distances.
- Enhanced EDID (Extended Display Identification Data) - Can capture an EDID setting from a device connected to the output and store it in a non-volatile memory. The user can recall this setting or a factory default EDID.
- Flexible Control Options - Front panel, IR Remote, RS-232 (K Router™ Windows®-based software is included) & Ethernet (Windows®-based Ethernet Configuration Manager & Virtual Serial Port Manager is included).
- Output Disconnect - Each output.
- Front Panel Lockout.
- Memory Locations - Store multiple switches as presets to be recalled and executed when needed.
- Worldwide Power Supply - 90-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.



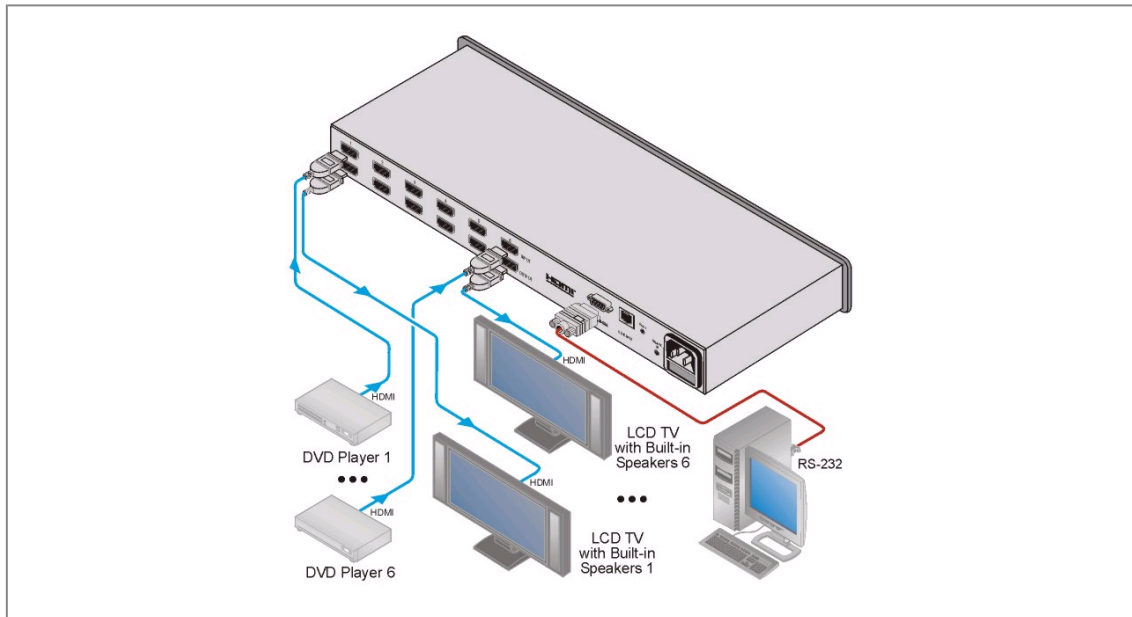

- HDTV Computers.
- **HDCP Compliant.**
- **Kramer re-Klocking & Equalization Technology** - Rebuilds the digital signal integrity to travel longer distances.
- **Enhanced EDID (Extended Display Identification Data)** - Can capture an EDID setting from a device connected to the output and store it in a non-volatile memory. The user can recall this setting or a factory default EDID.
- **Flexible Control Options** - Front panel, IR Remote, RS-232 (K Router™ Windows®-based software is included) & Ethernet (Windows®-based Ethernet Configuration Manager & Virtual Serial Port Manager is included).
- **Output Disconnect** - Each output.
- **Front Panel Lockout.**
- **Memory Locations** - Store multiple switches as presets to be recalled and executed when needed.
- **Worldwide Power Supply** - 90-240V AC.
- **Standard 19" Rack Mount Size** - 1U. Rack "ears" included.

**OUTPUTS:** 6 HDMI Connectors

**BANDWIDTH:** Supports up to 1.65Gbps bandwidth per graphic channel

**COMPLIANCE WITH HDMI STANDARD:** Supports HDMI 1.1 and HDCP

**RESOLUTION:** Up to UXGA; 1080p

**POWER SOURCE:** 100-240VAC; 50/60Hz, 32VA

**CONTROLS:** Front panel buttons, Infra-red remote control transmitter, RS-232, Ethernet

**DIMENSIONS:** 19-inch (W), 7-inch (D), 1U (H)

**WEIGHT:** 2.5 kg. (5.5 lbs.) approx.

**ACCESSORIES:** Power cord, IR transmitter

**OPTIONS:** Kramer HDMI cables