




## VS-6EII

4x4 Video & Audio Matrix Switcher



The **VS-6EII** is a high performance matrix switcher for composite video and unbalanced stereo audio signals. It can switch any or all of the four inputs to any or all of the four outputs simultaneously.

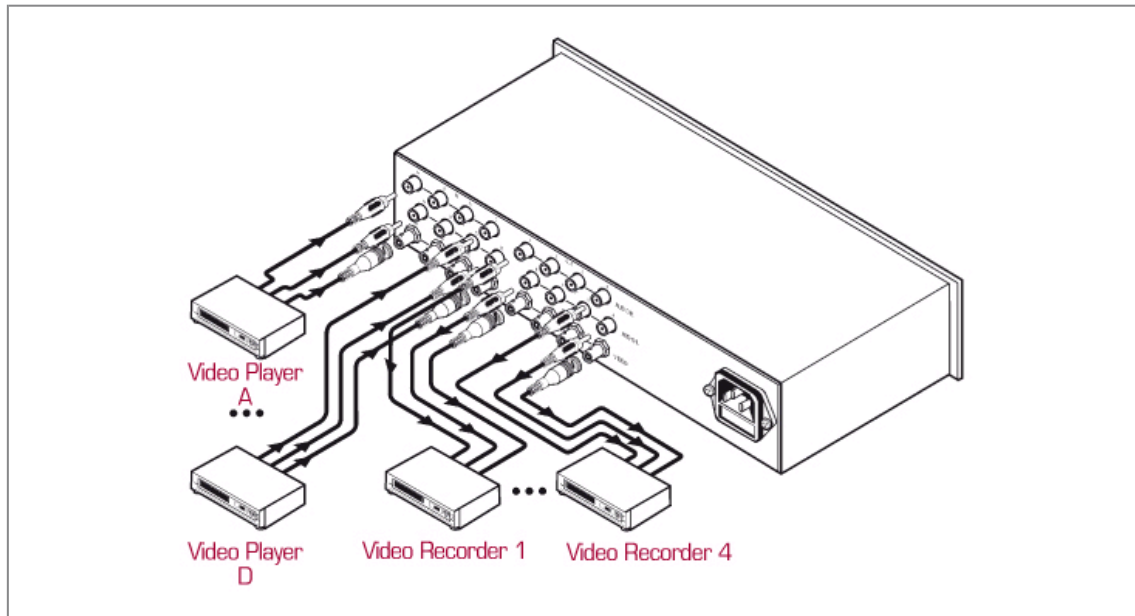



## VS-6EII

---

### FEATURES

---

- **Bandwidth** - 100MHz (- 3dB) fully loaded.
- **Control** - 4 rotary knobs.
- **Desktop Size** - Compact size. Can be rackmounted in a 2U rack space with the optional RK-10 adapter.

### TECHNICAL SPECIFICATIONS

---

INPUTS:	4 Video, 1Vpp/75 $\Omega$ Composite on BNCs. 4 stereo audio 1Vpp/100k $\Omega$ on RCAs.
OUTPUTS:	4 Video 1 Vpp/75 $\Omega$ on BNCs. 4 stereo audio 1Vpp/100W on RCAs.
VIDEO BANDWIDTH:	Exceeding 100 MHz.
AUDIO BANDWIDTH:	Exceeding 24 kHz.
DIFF. GAIN:	1.3%.
DIFF. PHASE:	0.9 Deg.
MAX. VIDEO OUTPUT:	2Vpp/ $\Omega$ .
VIDEO S/N RATIO:	74 dB.
AUDIO S/N RATIO:	80 dB.
AUDIO THD:	0.02%.
VIDEO CROSSTALK:	-65dB (SYNC), -48dB (C).
DIMENSIONS:	24.5cm X 16cm X 5cm (9.6" x 6.3" x 1.9", W, D, H).
POWER SOURCE:	230 VAC, 50/60 Hz, (115VAC, U.S.A.) 10.6 VA.
WEIGHT:	1.7 kg. (3.8 lbs.) Approx.
ACCESSORIES:	Power cord.
OPTIONS:	RK-10, 19" rack adapter