




VS-88A

8x8 Balanced Stereo Audio Matrix Switcher



The **VS-88A** is a high performance matrix switcher for balanced stereo audio signals. It can route any or all inputs to any or all outputs simultaneously.

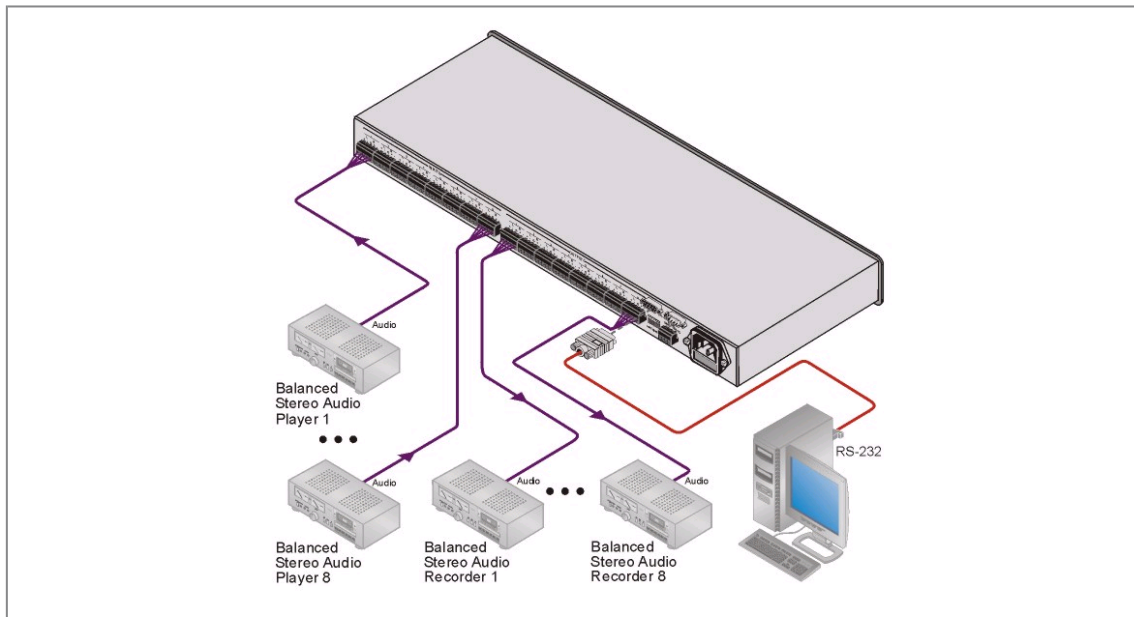



VS-88A

FEATURES

- **S/N Ratio** - 84dB unweighted (1Vpp).
- **Control** - Front panel, RS-232 (K-Router™ Windows - based software is included), & RS-485.
- **Take Button** - Execute multiple switches all at once.
- **Memory Locations** - Store multiple switches as presets to be recalled and executed when needed.
- **Worldwide Power Supply** - 85-264V AC.
- **Standard 19" Rack Mount Size** - 1U.

TECHNICAL SPECIFICATIONS

2nd HARMONIC:	0.013%
INPUTS:	8 balanced stereo audio, +4 dBm/33kΩ on detachable terminal blocks.
OUTPUTS:	8 balanced stereo audio, +4 dBm/50W (20 Vpp max) on detachable terminal blocks.
AUDIO BANDWIDTH:	Exceeding 100 kHz.
AUDIO S/N:	84 dB unweighted (1Vpp)
AUDIO TND:	0.025% (1Vpp, 1kHz)
MAXIMAL AUDIO:	>20dBm
CONTROLS:	22 front panel touch switches, RS-232 and RS-485 control interface.
DISPLAY:	Current switcher status on 8 7-segment bright LEDs.
DIMENSIONS:	19-inch (W) x 7-inch (D) x 1U (H), rack mountable.
POWER:	Universal, 85-264 VAC, 47-440 Hz, 25 VA max.
WEIGHT:	3.5 kg. (7.8 lbs.) Approx.