

HD-MD8X1

QuickSwitch HD® 8x1 HDMI® Switcher

- > High-performance 8x1 HDMI® switcher
- > QuickSwitch HD® switching technology
- > Handles HDMI with Deep Color, 3D, and 7.1 linear PCM or high-bitrate encoded audio
- > Also compatible with DVI and DisplayPort Multimode^[2]
- > Supports video resolutions up to WUXGA 1920x1200 and HD 1080p60
- > Detects and reports detailed video and audio input information
- > Manages HDCP digital rights management for all connected devices
- > Performs automatic AV signal format management via EDID
- > HD-SCALER option ensures optimal image quality for all sources^[1]
- > Includes front panel controls with security lockout
- > Allows audio breakaway switching
- > Simple setup and diagnostics via software
- > Native control system integration via Ethernet or Cresnet®
- > Provides input expansion for the Adagio® Media System (AMS)
- > Single-space 19-inch rack-mountable

QuickSwitch HD® switchers from Crestron® enable high-performance HDMI signal selection with groundbreaking new features designed by Crestron to deliver fast, trouble-free switching of all your DVD and Blu-ray Disc® players, HDTV receivers, media servers, game consoles, multimedia computers, surround processors and high-def displays. The HD-MD8X1 model features eight HDMI inputs, and a single HDMI output to feed a video display or processor.

HDMI is the standard for interfacing high-definition AV equipment, and it is key to handling the latest HD video and audio formats. As the leader in HDMI and control system technologies, Crestron has designed its QuickSwitch HD switchers to provide unparalleled performance, functionality, and custom integration capability. The HD-MD8X1 supports HDMI with HDCP, Deep Color and 3D, handling 1080p60 HD video and WUXGA computer resolutions, and multi-channel HD lossless audio.

QuickSwitch HD® Technology

Handling high-definition digital media means handling HDCP (High-bandwidth Digital Content Protection), the encryption scheme that content providers use to protect their DVDs, Blu-ray discs, and broadcast signals against unauthorized copying. Viewing HDCP encrypted content requires a source device to “authenticate” each display and signal processor in the system and issue each one a “key” before the content can be viewed. Ordinarily this causes a complete loss of signal for up to 15 seconds each time a new source is selected. Not to worry — Crestron QuickSwitch HD manages the keys for every HDCP-compliant device in the system, maintaining continuous authentication for each device to ensure fast, reliable switching.



HDMI
HIGH DEFINITION MULTIMEDIA INTERFACE

EDID Format Management

With HDMI comes a multitude of confusing video and audio formats to keep track of, and chances are not every device in your system supports all of the same formats. The HD-MD8X1 eliminates any conflicts by managing the EDID (Extended Display Identification Data) that HDMI devices use to communicate their capabilities. Via Crestron Toolbox™ software, the format and resolution capabilities of each device can be assessed, allowing the installer to configure EDID signals appropriately for the most desirable and predictable behavior. Signal information such as resolution, frame rate, aspect ratio, color depth, and audio format can also be sent to the control system and displayed on a touch screen to allow custom functionality and enhanced diagnostics.

High-Definition Scaler Option

High-performance scaling capability can be added to the HD-MD8X1 using the optional **HD-SCALER**^[1]. The HD-SCALER features fully automatic operation and is compact enough to install right at the display location, ensuring an optimal image no matter what source is selected. It also provides analog video and audio inputs to accommodate additional analog sources.

Computer Compatibility

Besides handling every available HD format supported by HDMI, the HD-MD8X1 also supports computer resolutions up to 1920 x 1200 WUXGA, and is compatible with DVI and DisplayPort Multimode computer signals using a suitable adapter or dongle^[2].

Audio Breakaway

Audio signals may be routed independent of video in the HD-MD8X1, allowing listening to one source while viewing another. For instance, listen to your favorite music from your media server while playing a video game or surfing the Internet on screen.

Front Panel Controls

The HD-MD8X1 works right out of the box without requiring any connection to a control system or computer, providing intuitive signal switching via its front panel. The front panel is great for everyday use, or may be used just for initial system testing. Front panel buttons may be

HD-MD8X1 QuickSwitch HD® 8x1 HDMI® Switcher



HD-MD8X1 – Rear View

locked out to prevent unauthorized tampering or accidental switching, while the LED indicators remain active to show signal routing status. The input and output controls can be labeled easily using Crestron Engraver software or standard 3/8" tape labels.

Native Crestron Control

Via the choice of Cresnet® or high-speed Ethernet, the HD-MD8X1 allows direct communication with a Crestron control system for a fully integrated signal routing solution as part of any high-end home theater, boardroom, classroom, or command center system.

Easy Setup

Despite its many powerful features and capabilities, the HD-MD8X1 is simple to set up using [Crestron Toolbox](#) software. The Toolbox setup tool allows the installer to view information about each HDMI device and easily make intelligent choices to ensure a reliable system setup.

Adagio® Media System Expansion

The HD-MD8X1 provides transparent input expansion for the Crestron [AMS](#), increasing its input capacity to 10 full-featured HDMI inputs with all signal routing controlled right through the AMS's front panel and remote. Adding the HD-MD8X1 to an AMS system is made simple using Adagio Composer software.

SPECIFICATIONS

Video

Switcher: 8x1 digital switcher, resolution management, Crestron QuickSwitch HD®

Input Signal Types: HDMI, DVI^[2], DisplayPort Multimode^[2]

Output Signal Types: HDMI, DVI^[2]

Formats: HDMI w/Deep Color & 3D, DVI, HDCP content protection support

Input Resolutions, Progressive: 640x480@60Hz, 720x480@60Hz (480p), 720x576@50Hz (576p), 800x600@60Hz, 848x480@60Hz, 852x480@60Hz, 854x480@60Hz, 1024x768@60Hz, 1024x852@60Hz, 1024x1024@60Hz, 1280x720@50Hz (720p50), 1280x720@60Hz (720p60), 1280x768@60Hz, 1280x800@60Hz, 1280x960@60Hz, 1280x1024@60Hz, 1360x768@60Hz, 1365x1024@60Hz, 1366x768@60Hz, 1400x1050@60Hz, 1440x900@60Hz, 1600x900@60Hz, 1600x1200@60Hz, 1680x1050@60Hz, 1920x1080@24Hz (1080p24), 1920x1080@25Hz (1080p25), 1920x1080@50Hz (1080p50), 1920x1080@60Hz (1080p60), 1920x1200@60Hz, 2048x1080@24Hz, 2048x1152@60Hz, plus any other resolution allowed by HDMI up to 165MHz pixel clock

Input Resolutions, Interlaced: 720x480@30Hz (480i), 720x576@25Hz (576i), 1920x1080@25Hz (1080i25), 1920x1080@30Hz (1080i30), plus any other resolution allowed by HDMI up to 165MHz pixel clock

Output Resolutions: Matched to inputs

Audio

Switcher: 8x1 digital multi-channel switching, audio-follow-video or breakaway

Input Signal Types: HDMI, DisplayPort Multimode^[2]

Output Signal Types: HDMI

Formats: Dolby Digital®, Dolby Digital EX, Dolby Digital Plus, Dolby® TrueHD, DTS®, DTS-ES, DTS 96/24, DTS-HD High Res, DTS-HD Master Audio™, Up to 8ch PCM

Communications

Ethernet: For control and console; 10/100 Mbps, auto-switching, auto-negotiating, auto-discovery, full/half duplex, DHCP

Cresnet: For control and console, Cresnet slave

USB: For console, USB 1.1 client

HDMI: Provides EDID and HDCP key management

Connectors

INPUT 1 – 8: (8) 19-pin Type A HDMI female; HDMI digital video/audio inputs; Also supports DVI and DisplayPort Multimode^[2]

OUTPUT 1: (1) 19-pin Type A HDMI female; HDMI digital video/audio output; also supports DVI^[2]

LAN: (1) 8-wire RJ45 female (8P8C modular jack); 10Base-T/100Base-TX Ethernet port

COMPUTER: (1) USB Type B female; USB 1.1 computer console port (6 ft cable included)

NET: (2) 4-pin 3.5mm detachable terminal blocks; Cresnet slave ports, paralleled

G: (1) 6-32 screw, chassis ground lug

Controls & Indicators

PWR: (1) green LED, indicates 24 Volts DC power supplied from Cresnet control network

NET: (1) amber LED, indicates communication with Cresnet system

SYNC: (1) recessed pushbutton & red LED, selects SYNC mode for viewing input signal sensing

VIEW: (1) pushbutton and red LED, selects VIEW mode for viewing current routes

ROUTE: (1) pushbutton and red LED, selects ROUTE mode to allow routing changes

HD-MD8X1 QuickSwitch HD® 8x1 HDMI® Switcher

A: (1) pushbutton & red LED, selects audio routing view
V: (1) pushbutton & red LED, selects video routing view
IN 1 – 8: (8) pushbuttons and red LEDs, select input for routing
OUT 1: (1) pushbutton and red LED, selects output for routing
SETUP (rear): (1) miniature pushbutton & red LED, used for touch-settable ID (TSID) and Ethernet autodiscovery
LAN (rear): (1) green and (1) amber LEDs, green indicates Ethernet link status, amber indicates Ethernet activity

Power Requirements

Cresnet Power Usage: 26 Watts (1.09 Amps @ 24 Volts DC)

Environmental

Temperature: 32° to 104°F (0° to 40°C)
Humidity: 10% to 90% RH (non-condensing)
Heat Dissipation: 92 BTU/Hr

Enclosure

Chassis: Metal, black finish, convection-cooled, vented top and sides
Faceplate: Metal, black finish with polycarbonate label overlay
Mounting: Freestanding or 1U 19-inch rack-mountable (adhesive feet and rack ears included)

Dimensions

Height: 1.80 in (46 mm);
1.70 in (44 mm) without feet
Width: 17.03 in (433 mm); 19.0 in (483 mm) with ears
Depth: 10.06 in (256 mm)

Weight

4.1 lb (1.9 kg)

MODELS & ACCESSORIES

Available Models

HD-MD8X1: QuickSwitch HD® 8x1 HDMI® Switcher

Available Accessories

HD-DA-2: 1-to-2 HDMI® Distribution Amplifier & Audio Converter
HD-SCALER: High-Definition Video Scaler
DMCI: DigitalMedia™ Card Interface
HD-EXT1-C: HDMI® over Shielded Twisted Pair Extender
HD-EXT2-C: HDMI® over Shielded Twisted Pair Extender
HD-TX1-F: HDMI® over Fiber Transmitter
HD-RX1-F: HDMI® over Fiber Receiver
HD-TX3-F: HDMI® over Fiber Transmitter
HD-RX3-F: HDMI® over Fiber Receiver
CBL-HD: Crestron® Certified HDMI® Interface Cables
CBL-HD-DVI: Crestron® Certified HDMI® to DVI Interface Cables
CBL-HD-LOCK: Locking High-Speed HDMI® Cables

Notes:

1. Item(s) sold separately.
2. HDMI IN requires an appropriate adapter or interface cable to accommodate a DVI or DisplayPort Multimode signal. HDMI OUT requires an appropriate adapter or interface cable to accommodate a DVI signal. [CBL-HD-DVI](#) interface cables available separately.





This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/salesreps or by calling 800-237-2041.

Specifications subject to change without notice. Crestron is not responsible for errors in typography or photography.

The specific patents that cover Crestron products are listed online at: patents.crestron.com.

Adagio, Cresnet, Crestron, Crestron Toolbox, QuickSwitch HD, and the Crestron logo are either trademarks or registered trademark of Crestron Electronics, Inc. in the United States and/or other countries. Blu-ray Disc is either a trademark or registered trademark of the Blu-ray Disc Association in the United States and/or other countries. Dolby and Dolby Digital are either trademarks or registered trademarks of Dolby Laboratories in the United States and/or other countries. DTS and DTS-HD Master Audio are either trademarks or registered trademarks of DTS, Inc. in the United States and/or other countries. HDMI and the HDMI Logo are either trademarks or registered trademarks of HDMI Licensing LLC in the United States and/or other countries. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. ©2012 Crestron Electronics, Inc.

HD-MD8X1 QuickSwitch HD[®] 8x1 HDMI[®] Switcher

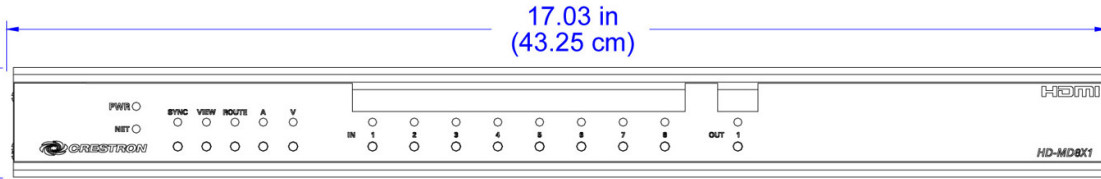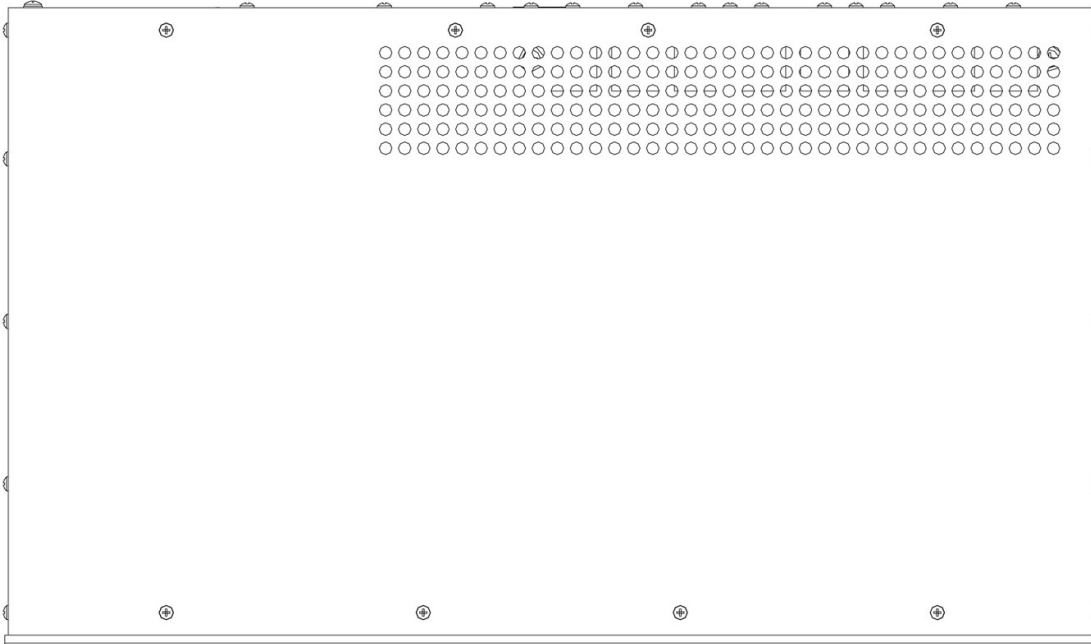

17.03 in
(43.25 cm)