



APPLICATIONS

- Audio Over IP transmission, using standard Ethernet networks
- Dante™ digital audio receiver
- Priority messages management
- Education, Retail Centers, Museums, Etc.

eCA120DN is a 2 x 60 WRMS @ 4Ω high efficiency (class D) stereo compact amplifier. It features 2 x analogue audio inputs and 2 x Dante™ audio inputs, both with selectable priority function (over the other input signal) as well as an auxiliary audio output. Auto stand-by function (selectable) and fanless design (100% silent). It also has a remote control volume port compatible with ECLER WPa wall-panel control series. Universal external power supply included.

eCA120HZDN is a 120 WRMS @ 100V efficiency (class D) mono compact amplifier for high impedance lines, with the same features than eCA120DN.


ACCESSORIES



■ 1UHRMKIT



■ WPa Series

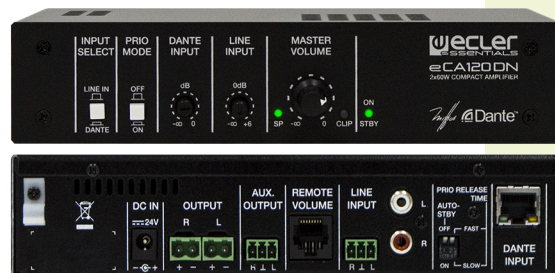

eCA120DN



eCA120HZDN



KEY FEATURES

- 2 x 60 W RMS @ 4 output (eCA120DN)
- 1 x 120W RMS @ 100V output (eCA120HZDN)
- 1 x auxiliary audio output (Euroblock connector), for connecting to a sub-woofer unit e.g.
- 1 x unbalanced stereo input (LINE INPUT), with dual RCA connector and 3-in Euroblock connector
- 2 x Dante™ audio input (DANTE INPUT), with RJ-45 connector
- Selectable PRIORITY FUNCTION with selectable priority signal: the analogue audio input (LINE INPUT) can be selected as priority signal over the Dante™ audio input (DANTE INPUT), or vice versa.
- Priority release time adjustment (FAST / SLOW).
- Selectable AUTO STANDBY function: in the absence of an audio signal the unit automatically goes into STANDBY mode, minimizing power consumption.
- Gain adjust of audio inputs on front panel (trimmers)
- Local volume control by knob
- Remote volume control (RJ-45 connector.) via WPa wall-panel control series (0-10 VDC).
- Lightweight, silent, high-performance amplifier (fan-free convection cooling).
- External, universal power supply (included)

|                          | eCA120DN                            | eCA120HZDN                          |
|--------------------------|-------------------------------------|-------------------------------------|
| 1 channel @ 4Ω (RMS)     | 68W                                 | -                                   |
| 1 channel @ 70/100V(RMS) | -                                   | 98W                                 |
| Inputs                   | 1 LINE ST + 2 Dante                 | 1 LINE ST + 2 Dante                 |
| Remote control           | 1 RJ45                              | 1 RJ45                              |
| Dimensions / Weight      | HxWxD: 44 (1RU)x200x120mm / 0,9 kg. | HxWxD: 44 (1RU)x435x120mm / 2,8 kg. |