
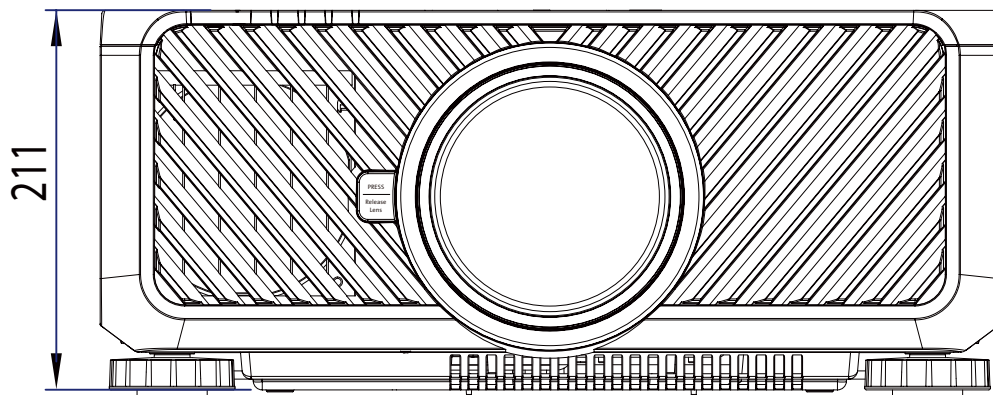


Specifications

| | | | |
|------------------------------------|--|--|-------------|
| Model | | LU9915 | |
| Display Device | | Single Chip 0.67" DLP Technology | |
| Resolution | | WUXGA | |
| Input Terminals | HDMI (Compatible with HDCP) | | |
| | DVI-D (Compatible with HDCP) | | |
| | Display Port (Compatible with HDCP) | | |
| | 3G-SDI In (Compatible with HDCP) | | |
| | Computer-1 (D-sub 15p) | | |
| | Computer-2 (5BNC) | | |
| | HDBaseT (Shared with RJ-45) | | |
| | 3D Sync In (BNC) | | |
| Output Terminals | Monitor Out (D-sub 15 p) | | |
| | Trigger (\varnothing 3.5mm stereo min jack) | X1(DC 12V Output) | |
| | 3D Sync Out (BNC) | | |
| | 3G-SDI Out | | |
| Control and Service | Lan (RJ-45)(10/100 Mbps) | | |
| | Wired Remote (\varnothing 3.5mm stereo min jack) | | |
| | RS-232 | | |
| Power Requirement | | AC 100-130V | AC 200-240V |
| Input Current | | 13.4A | 6.2A |
| Power Consumption (Normal Mode) | | 1290W@100V (typical), 1215W@240V (typical) | |
| Operation Temperature | | 32°F to 104°F (0°C to 40°C) | |
| Storage Temperature | | 14°F to 140°F (-10°C to 60°C), 5% to 95% Humidity (non-condensing) | |

| | |
|-----------------------------|---|
| Dimensions | 22.95" x 19.6" x 8.31" 583mm(L) x 500mm(W) x 211mm(H) (not including protrusions or feet) |
| Net Weight (Projector Only) | 28kg |

Dimension

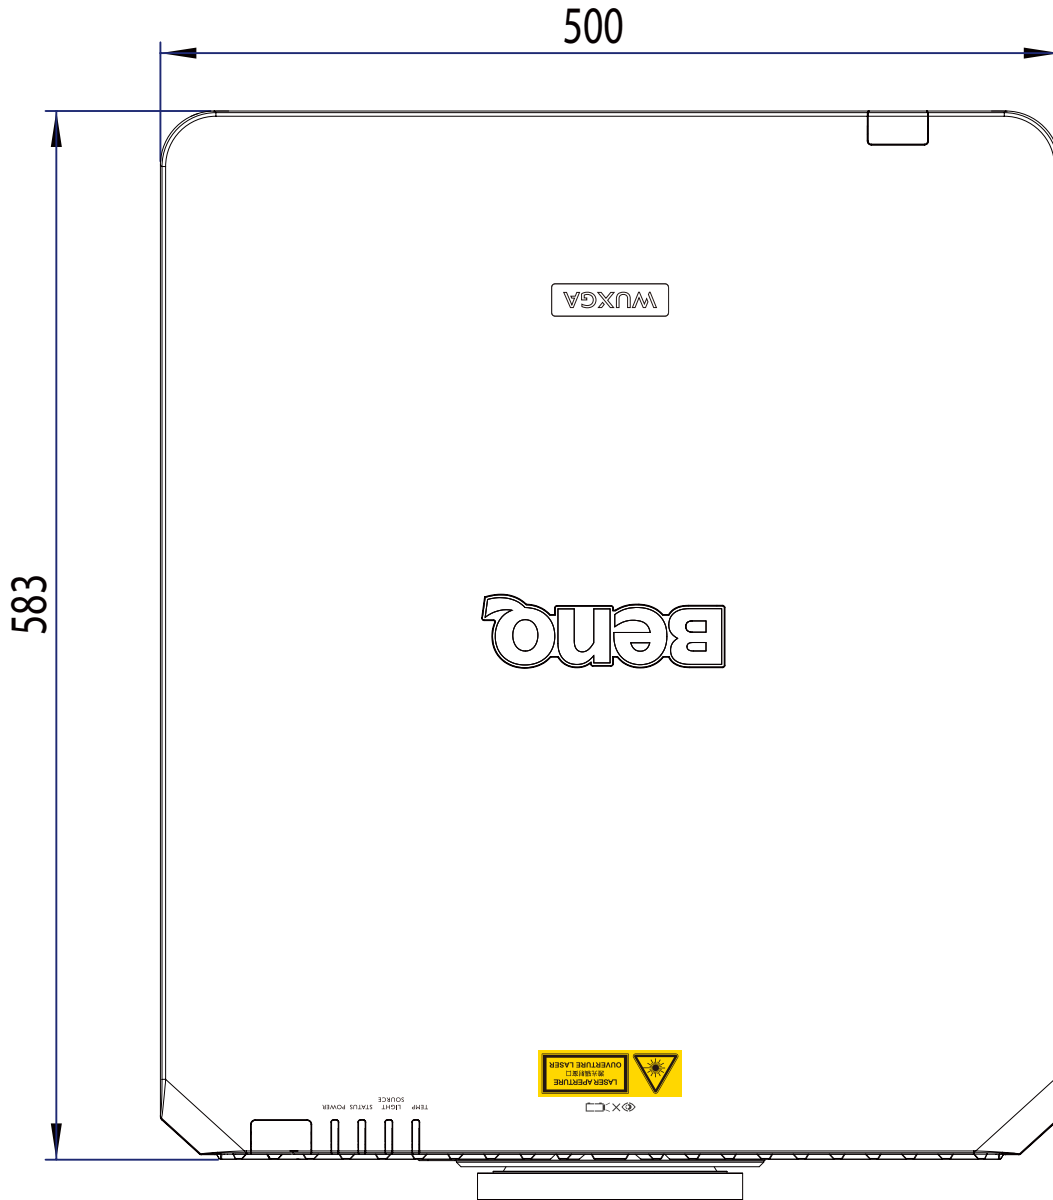

Unit: mm