

# **CMAR5-W**

5" two-way built-in marine speaker 8 ohms/50W



The CMAR5-W is a chlorine and salt water proof twoway 5.25" loudspeaker. This marine speaker has been designed especially to offer superb sound and efficiency even in the most difficult, humid and hot conditions.

We have combined the best quality components with rigorous engineering specifications which results in a speaker that offers both durability and a great sound.

The fully plastic housing and stainless steel grille of the CMAR5-W loudspeaker are an absolute guarantee against rust and allow use in temperatures up to 95°C. Especially for use in yachts, cruise ships or sauna.


The CMAR Marine Series is available in 5.25" (CMAR5-W), 6.5" (CMAR6-W) and 8" (CMAR8-W), so that there is always a speaker that exactly fits your needs!

## **TECHNICAL SPECIFICATIONS**

| outside diameter in mm                     | 152           | depth in mm                    | 55              |
|--|---------------|--------------------------------|-----------------|
| cutout in mm                               | 113           | installation grip range in mm  | 1 - up          |
| loudspeaker system                         | 2-way         | woofer size in inch            | 5.25            |
| woofer cone material                       | polypropylene | tweeter size in inch           | 1 - up          |
| mounting system                            | 4 screws      | colour                         | white           |
| impedance in ohms                          | 8             | low impedance dynamic power    | 50              |
| low impedance RMS power in watts           | 25            | in watts                       |                 |
|  |               | SPL 1W/1m in dB                | 88              |
| max SPL 1m in dB                           | 100           | frequency response in Hz       | 85 - 20K        |
| main construction material                 | ABS plastic   | grille main material           | stainless steel |
| IP rating                                  |               | applicable low impedance       | yes             |
| applicable in 100V                         | no            | Vertical dispersion angle 1000 | 180°            |
| closest RAL colour (subject to deviations) | RAL9003       | Hz                             |                 |
|  |               | Net weight product in kg       | 0.60            |



## **POLAR PLOTS**

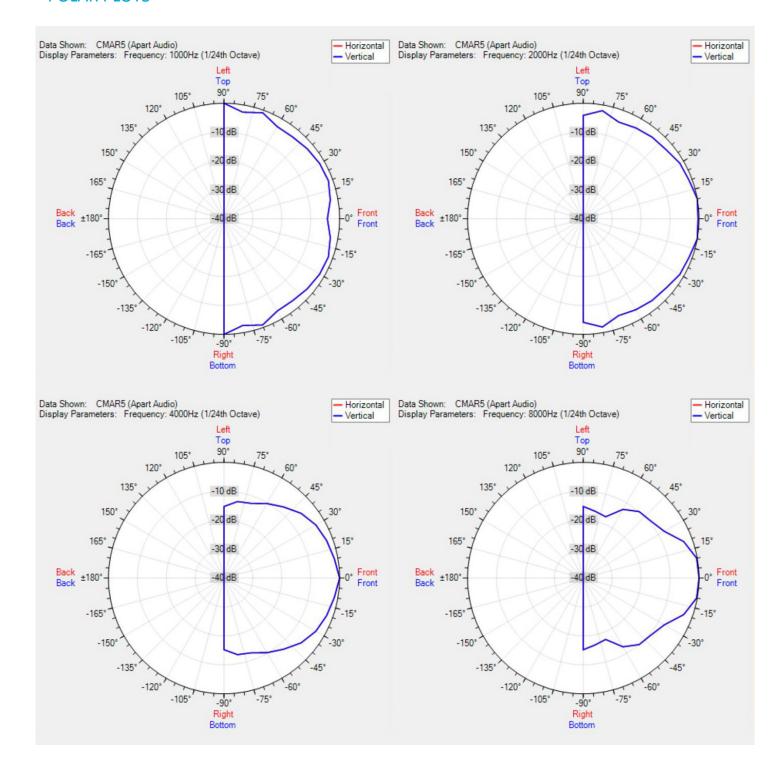



## MORE PICTURES





## **ACCESSORIES**



## T20IP

waterproof 8 ohms / 100 volt transformer, 20 watts