

VS-101AV


10x1 Audio-Video Switcher







The VS-101AV is a high performance switcher for composite video and unbalanced audio signals. It switches any one of 10 composite video and unbalanced stereo audio signals to a single composite output.

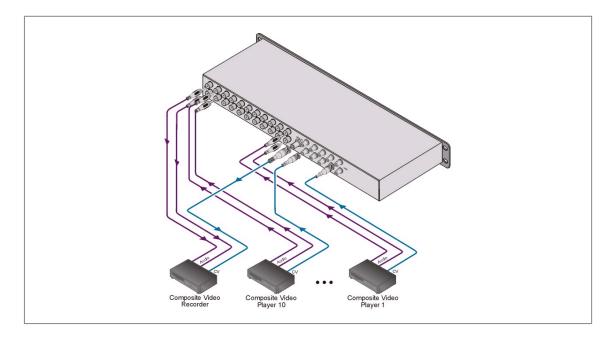



VS-101AV

FEATURES

■ High Bandwidth - 500MHz (- 3dB).

Mechanical (Passive) Switching - No powerrequired.

Standard 19" Rack Mount Size - 1U.

TECHNICAL SPECIFICATIONS

INPUTS: 10 Video, $1Vpp / 75 \Omega$ on

BNCs, 10 stereo audio, +4dBm typical, on RCAs.

OUTPUTS: 1 video, $1Vpp / 75\Omega$ on a BNC

connector 1 Stereo audio, +4dBm typical, on RCAs.

SWITCHING Mechanical, "Break-before-SYSTEM: make", Audio- Follow-Video

mode

FREQUENCY 500 MHz -3dB (video). 100 kHz

RESPONSE: -3dB (audio)

CROSSPOINTS: 10 for video, 10x2 for audio, 1

set active at any given time

SIGNAL LEVELS: Up to 3Vpp Video, +30dBm

Audio.

DIMENSIONS 48.3cm x 10.2cm x4.4cm, (19"

(W,D,H): x4" x 1U)

WEIGHT: 1.5kg.(3.3 lbs.) Approx.