


KRAMER ELECTRONICS, Ltd.

VS-161HDMI 16x1 HDMI Switcher





The VS-161HDMI is a high performance switcher for HDMI signals. It reclocks and equalizes the signal and switches either of 16 inputs to a single HDMI output.

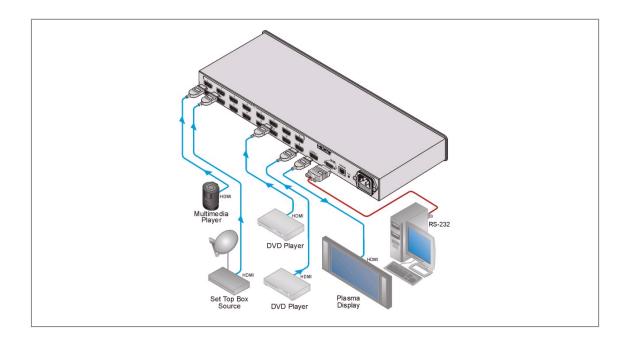



www.kramerelectronics.com

## VS-161HDMI

## FEATURES

- Max Data Rate 1.65Gbps.
- HDCP Compliant
- HDTV Compatible.
- Enhanced EDID (Extended Display Identification Data) - The unit can store a default EDID settings in non-volatile memory from the output allowing convenient and reliable connection to the source.
- Dual Mode PC and DVD Modes selectable by input
- Flexible Control Options Front panel, IR Remote, RS-232 (K-Router™ Windov®based software is included) & Ethernet (Windows®-based Ethernet Configuration Manager & virtual Serial Prot Manager is included)
- Video Disconnect
- Front Panel Lockout
- Kramer Equalization & re-Klocking Technology - Rebuilds the digital signal to travel longer distances.
- Worldwide Power Supply 100-264V AC
- Standard 19" Rack Mount Size 1U

## TECHNICAL SPECIFICATIONS

INPUTS:	16 HDMI Connectors
OUTPUT:	1 HDMI Connector
BANDWIDTH:	Supports up to 1.65Gbps bandwidth per graphic channel
COMPLIANCE WITH HDMI STANDARDS:	Supports HDMI 1.2 and HDCP
RESOLUTION:	Up to UXGA; 1080p
POWER SOURCE:	90 240VAC; 50/60Hz, 22VA
CONTROLS:	Front panel buttons, Infra- red remote control transmitter, RS-232, Ethernet
DIMENSIONS:	19-inch (W), 7-inch (D), 1U (H)
WEIGHT:	2.5 kg. (5.5 lbs.) approx.
ACCESSORIES:	Power cord
OPTIONS:	Kramer HDMI cables