

VS-41AV


4x1 Video Audio Switcher







The VS-41AV is a high performance switcher for composite video and unbalanced stereo audio signals. It switches any one of four signals to a single output.

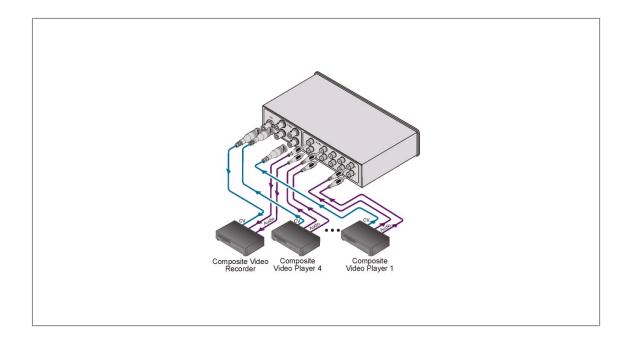



VS-41AV

FEATURES

- High Bandwidth 520MHz (- 3dB).
- Mechanical (Passive) Switching No powerrequired.
- Desktop Size Compact size. Two units can berack mounted side-by-side in a 1U rack spacewith the optional RK-81 adapter.

TECHNICAL SPECIFICATIONS

INPUTS: 4 video, 1Vpp / 75 Ω on BNCs. 4

audio stereo, +up to 36 Vpp, on

RCAs

OUTPUTS: 1 video, $1Vpp / 75\Omega$ on a BNC

connector. 1 audio stereo, +4dBm typical, on RCAs

SWITCHING Mechanical SYSTEM: make", Aud

Mechanical, "Break-before-make", Audio-Follow-Video

mode.

BANDWIDTH: 500 MHz -3dB (video), 100 kHz -

3dB (audio)

CROSSPOINTS: 4 for video,4x2 for audio, 1 set

active at any given time.

SIGNAL LEVELS: Up to 3Vpp Video, +30dBm

Audio.

DIMENSIONS 18.8cm x 10.2cm x4.4cm, (7.4"

(W,D,H): $x4" \times 1.7"$

WEIGHT: 0.65kg.(1.44lbs.) Approx. OPTIONS: 19" Rack adapter RK-81