

VS-81AYC


8x1 s-Video Audio Switcher







The VS-81AYC is a high performance switcher for s-Video (Y/C) and unbalanced audio signals. It switches any one of eight audio and video signals to a single audio and video output.

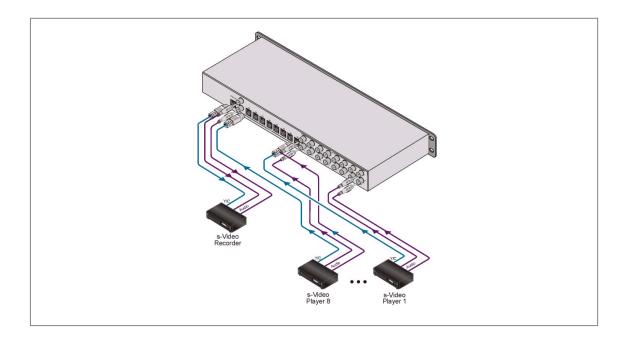



VS-81AYC

FEATURES

■ Bandwidth (Y) - 350MHz (- 3dB).

Mechanical (Passive) Switching - No powerrequired.

Standard 19" Rack Mount Size - 1U.

TECHNICAL SPECIFICATIONS

CROSSPOINTS: 1 of 8.

SIGNAL LEVELS: Up to 3Vpp video (Y), +30dBm

audio.

FREQUENCY Video: 350 MHz +/- 2dB (Y);
RESPONSE: Audio: DC-100 kHz, -1dB.

DIMENSIONS: 19 inch (W),4 inch (D), 1U (H)

rack mountable.

WEIGHT: 1.4 kg. (3.1 lbs.) Approx. INPUTS: 8 s-Video, $1Vpp/75 \Omega$ (Y), $0.3Vpp/75\Omega$ (C) nom. on "4P"

 $0.3Vpp/75\Omega$ (C) nom. on "4P" connectors. 8 stereo audio, on

RCAs.

OUTPUTS: 1 s-Video, $1Vpp/75\Omega(Y)$,

 $0.3 Vpp/75\Omega$ (C) nom. on a "4P" connector. 1 stereo audio, on

RCAs.

SWITCHING Mechanical, Break-before-

SYSTEM: Make.