

HCS-4886C/50 Chairman Unit with Voting and Channel Selection



Tabletop



Flush-mounting

Features

- Stylish and ergonomic design
- Hi-Fi loudspeaker
- Priority button
- Pluggable microphone
- 5 voting keys
- “Closed Loop - Daisy Chain” connection topology
- Transmitting up to 64 CHs high quality digital audio signals on a dedicated 6-pin cable
- Supporting 48 kHz audio sampling rate, all 64 channels with a frequency response of 30 Hz to 20 kHz
- Built-in channel selector consists of up/down channel select buttons
- Excellent immunity to RF interference from mobile phones
- Gain and EQ (5 band) of each microphone adjustable separately
- Supporting “PnP” (plug and play)
- Built-in multi-channel intercom facility
- Contactless IC card & password keypad module (HCS-8386K) for unit upgrading
- Fingerprint identification & password keypad module (HCS-8386F) for unit upgrading

The stylish and ergonomically designed chairman unit has all the necessary facilities to enable the user to chair a conference. It has excellent immunity to RF interference from mobile phones. Similar in appearance to HCS-4886D/50 Delegate Unit, the HCS-4886C/50 Chairman Unit includes a microphone priority button. When pressed, the priority button causes all currently active delegate microphones to be switched off temporarily or permanently, allowing the chairman to take control of the meeting. The chairman unit can also be used to start or stop voting, cancel a request-to-speak, turn off all active microphones and recall messages for display. A graphic LCD screen with permanent backlighting can display characters from complex European languages or icon-based scripts such as Chinese. Channel selection is automatically limited to the number of language channels available. Loudspeaker with superior acoustics with minimal feedback for enhanced intelligibility.

Functions

- Compliant to IEC 60914
- “Closed Loop - Daisy Chain” connection topology for a high operational system reliability: breakdown or replacement of a congress unit and connection failure of a cable will not influence other congress units
- Based on TAIDEN originated MCA-STREAM digital audio processing and transmitting technologies
- Audio signals processed by high performance DSP: sound quality approaching CD quality
- Gain and EQ (5 band) of each microphone adjustable separately, fitting the individual orator's voice to achieve perfect speech pickup any time
- Transmitting up to 64 CHs high quality digital audio signals on a dedicated 6-pin cable (general Cat.5 cable substitutable)
- Supporting 48 kHz audio sampling rate, all 64 channels with a frequency response of 30 Hz to 20 kHz
- Integrated 80 Hz (18 dB/octave) high-pass filter (low-cut switch) to cut low frequency elements from the audio when needed
- Automatic recovery facility, supporting “PnP” (plug and play)
- Stem microphone can be unplugged during adjournment, easy to maintain
- Mini-microphone, with foam windshield
- Hi-Fi loudspeaker, minimal feedback, mutes automatically when microphone is active
- Excellent immunity to RF interference from mobile phones and comparable devices
- Microphone On/Off button, 5 voting keys
- Contactless IC card & password keypad module (HCS-8386K) for unit upgrading. The IC card may also be used to access the sign-in system
- Fingerprint identification & password keypad module (HCS-8386F) for biometric authentication with high reliability. The problem of a delegate's forgotten or lost IC card is also solved
- Every delegate unit is assigned an individual ID for convenient setup and to avoid double ID forever
- Facilities in stand-alone operation:
 - ◆ Set the number of delegates permitted to speak at the same time

- ◆ Speak mode: OPEN/OVERRIDE/VOICE/APPLY/PTT
 - "OPEN" mode, microphone On/Off button with request-to-speak registration (AUTO)
 - "OVERRIDE" mode, microphone On/Off button control with override of the active microphones (FIFO)
 - "VOICE" mode, acoustic active sensitivity and automatic switch-off time adjustable continuously, built-in "flash-on" technology, immediate microphone activation on speaking
 - "APPLY" mode, delegate applies to speak by pressing microphone On/Off button, delegate only speaks when operator or chairman approved his application
 - "PTT" mode, press microphone On/Off button to talk
- ◆ Voting function (Yes/No/Abstain)
- ◆ Simultaneous interpretation
- Multiform voting in combination with the corresponding software modules:
 - ◆ For/Against
 - ◆ Parliamentary: YES/NO/ABSTAIN
 - ◆ Questionnaire: 1/2/3/4/5
 - ◆ Audience response: --/0/+/++
 - ◆ Parliamentary (NPPV): YES/NO/ABSTAIN/NPPV
 - ◆ Appraisal:
 - Satisfied (Four keys voting: perfectly satisfied/satisfied/basicly satisfied/unsatisfied) (Three keys voting: satisfied/basicly satisfied/unsatisfied) (Two keys voting: satisfied/unsatisfied)
 - Qualified (four/three/two keys voting)
 - Competent (four/three/two keys voting)
- Built-in IC-card reader
- Key-press sign-in
- Automatic video tracking implementation when cooperating with cameras, video switcher unit; preset positions on PC
- Built-in multi-channel intercom facility
- Activation at any time (if the amount of active microphones in the system is less than 6)
- Priority button to switch off or to mute the speaking units according to preset (except VIP)
- Approves/denies delegates' speaking request
- Launches parliamentary voting (YES/NO/ABSTAIN) session without PC
- Controls voting start, suspend, re-start and stop
- Controls on-off switch for displaying voting results on delegate unit's LCD
- System supports up to 100 chairman units, while only 1 chairman unit has the control facilities listed above (set by software)

Controls and Indicators

- Graphic 256x32 LCD with back-lighting for displaying:
 - ◆ Active microphone amount, request amount, delegates signed-in and voting results, etc.
 - ◆ Messages (messages from system administrator to all or part of participants)
 - ◆ Multilingual (simplified/traditional Chinese and English, etc.) menu
 - ◆ Channel number and language name
- Built-in channel selector with up/down channel select buttons
- Uni-directional electret condenser microphone with two-color illuminated ring (blue/red)

- Headphones volume up and down
- Five voting keys with indicators
- Microphone On/Off button with indicator
- Priority button

Interconnections

- Socket for pluggable microphone
- 2 × Ø 3.5 mm stereo headphone jack
- Ø 3.5 mm socket for external microphone or headset microphone
- 1.5 m cable with 6P-DIN plug
- 0.6 m cable with 6P-DIN socket

Technical Specifications

Electrical

Max. consumption.....2.3 W

Headphone connection

Frequency response.....30 Hz to 20 kHz

Earphone load impedance.....>16 Ohm

Earphone output.....10 mW

Recommended external microphone type (or headset microphone)

Transducer.....Electret-condenser

Polar pattern.....Uni-directional

Operating voltage.....5 VDC

Sensitivity.....-46 dBV/Pa

Frequency response.....50 Hz to 20 kHz

Input impedance.....2 kOhm

Directivity 0°/180°.....> 20 dB (1 kHz)

Equivalent noise.....20 dBA (SPL)

Maximum sound pressure level.....125 dB (THD<3%)

Interface data

Connector.....Ø 3.5 mm socket for external mic.

.....2 × Ø 3.5 mm stereo jack for headphone

Mechanical

Mounting_Tabletop (portable or fixed mounting) and flush-mounting
Dimensions (h x w x d) (w/o stem microphone)

Tabletop.....66 x 251 x 121 mm

Flush-mounting.....13 x 251 x 121 mm

Weight (incl. stem microphone).....0.75 kg

Color.....Champagne panel + gray base /
Champagne panel + black base

Stem length.....410 mm (standard version),
240 mm, 330 mm, 470 mm

Ordering Information

HCS-4886C_S/50.....Fully Digital Congress System Chairman Unit (tabletop/flush-mounting, 5 voting keys, IC-Card, 64 CHs, 256x32 LCD, champagne panel + gray base)

HCS-4886C_B/50.....Fully Digital Congress System Chairman Unit (tabletop/flush-mounting, 5 voting keys, IC-Card, 64 CHs, 256x32 LCD, champagne panel + black base)

HCS-4886D/50 Discussion Unit with Voting and Channel Selection



Tabletop



Flush-mounting

Features

- Stylish and ergonomic design
- Hi-Fi loudspeaker
- Pluggable microphone
- 5 voting keys
- "Closed Loop - Daisy Chain" connection topology
- Transmitting up to 64 CHs high quality digital audio signals on a dedicated 6-pin cable
- Supporting 48 kHz audio sampling rate, all 64 channels with a frequency response of 30 Hz to 20 kHz
- Built-in channel selector consists of up/down channel select buttons
- Excellent immunity to RF interference from mobile phones
- Gain and EQ (5 band) of each microphone adjustable separately
- Supporting "PnP" (plug and play)
- Built-in multi-channel intercom facility
- Contactless IC card & password keypad module (HCS-8386K) for unit upgrading
- Fingerprint identification & password keypad module (HCS-8386F) for unit upgrading

The multi-functional delegate unit meets the demands of even the largest conferences. It provides facilities for speaking, registering a request-to-speak, registering a request-to-respond, listening, voting, selecting language channels, IC-card reading and displaying conference and user-related information. Excellent immunity to RF interference from mobile phones. Channel selector, IC-card reader and graphic display with backlighting. When the IC-card is inserted into the card reader, the graphic LCD screen automatically displays user-related information in the language assigned to the delegate chip card. The graphic LCD is able to display characters from complex European languages or icon-based-scripts such as Chinese. Channel selection is automatically limited to the number of language channels available. Loudspeaker with superior acoustics with minimal feedback for enhanced intelligibility.

Functions

- Compliant to IEC 60914
- "Closed Loop - Daisy Chain" connection topology for a high operational system reliability: breakdown or replacement of a congress unit and connection failure of a cable will not influence other congress units
- Based on TAIDEN originated MCA-STREAM digital audio processing and transmitting technologies
- Audio signals processed by high performance DSP: sound quality approaching CD quality
- Gain and EQ (5 band) of each microphone adjustable separately, fitting the individual orator's voice to achieve perfect speech pickup any time
- Transmitting up to 64 CHs high quality digital audio signals on a dedicated 6-pin cable (general Cat.5 cable substitutable)
- Supporting 48 kHz audio sampling rate, all 64 channels with a frequency response of 30 Hz to 20 kHz
- Integrated 80 Hz (18 dB/octave) high-pass filter (low-cut switch) to cut low frequency elements from the audio when needed
- Automatic recovery facility, supporting "PnP" (plug and play)
- Stem microphone can be unplugged during adjournment, easy to maintain
- Mini-microphone, with foam windshield
- Hi-Fi loudspeaker, minimal feedback, mutes automatically when microphone is active
- Excellent immunity to RF interference from mobile phones and comparable devices
- Microphone On/Off button, 5 voting keys
- Contactless IC card & password keypad module (HCS-8386K) for unit upgrading. The IC card may also be used to access the sign-in system
- Fingerprint identification & password keypad module (HCS-8386F) for biometric authentication with high reliability. The problem of a delegate's forgotten or lost IC card is also solved
- Every delegate unit is assigned an individual ID for convenient setup and to avoid double ID forever
- Facilities in stand-alone operation:
 - ◆ Set the number of delegates permitted to speak at the same time
 - ◆ Speak mode: OPEN/OVERRIDE/VOICE/APPLY/PTT
 - "OPEN" mode, microphone On/Off button with request-to-speak registration (AUTO)

- "OVERRIDE" mode, microphone On/Off button control with override of the active microphones (FIFO)
- "VOICE" mode, acoustic active sensitivity and automatic switch-off time adjustable continuously, built-in "flash-on" technology, immediate microphone activation on speaking
- "APPLY" mode, delegate applies to speak by pressing microphone On/Off button, delegate only speaks when operator or chairman approved his application
- "PTT" mode, press microphone On/Off button to talk
- ◆ Voting function (Yes/No/Abstain)
- ◆ Simultaneous interpretation
- Multiform voting in combination with the corresponding software modules:
 - ◆ For/Against
 - ◆ Parliamentary: YES/NO/ABSTAIN
 - ◆ Questionnaire: 1/2/3/4/5
 - ◆ Audience response: --/0/+/++
 - ◆ Parliamentary (NPPV): YES/NO/ABSTAIN/NPPV
 - ◆ Appraisal:
 - Satisfied (Four keys voting: perfectly satisfied/satisfied/basicly satisfied/unsatisfied) (Three keys voting: satisfied/basicly satisfied/unsatisfied) (Two keys voting: satisfied/unsatisfied)
 - Qualified (four/three/two keys voting)
 - Competent (four/three/two keys voting)
- Built-in IC-card reader
- Key-press sign-in
- Automatic video tracking implementation when cooperating with cameras, video switcher unit; preset positions on PC Built-in multi-channel intercom facility
- Set any delegate unit to be VIP unit
 - ◆ Up to 32 units can be set as VIP in one system via application software
 - ◆ VIP unit can be activated as long as the total of active microphones is not beyond 6 (incl. chairman/delegate/VIP unit)

Controls and Indicators

- Graphic 256x32 LCD with back-lighting for displaying:
 - ◆ Active microphone amount, request amount, delegates signed-in and voting results, etc.
 - ◆ Messages (messages from system administrator to all or part of participants)
 - ◆ Multilingual (simplified/traditional Chinese and English, etc.) menu
 - ◆ Channel number and language name
- Built-in channel selector with up/down channel select buttons
- Uni-directional electret condenser microphone with two-color illuminated ring (blue/red)
- Headphones volume up and down
- Five voting keys with indicators
- Microphone On/Off button with indicator

Interconnections

- Socket for pluggable microphone
- 2 × Ø 3.5 mm stereo headphone jack
- Ø 3.5 mm socket for external microphone or headset microphone
- 1.5 m cable with 6P-DIN plug
- 0.6 m cable with 6P-DIN socket

Technical Specifications

Electrical

Max. consumption.....2.3 W

Headphone connection

Frequency response.....30 Hz to 20 kHz

Earphone load impedance.....>16 Ohm

Earphone output.....10 mW

Recommended external microphone type (or headset microphone)

Transducer.....Electret-condenser

Polar pattern.....Uni-directional

Operating voltage.....5 VDC

Sensitivity.....-46 dBV/Pa

Frequency response.....50 Hz to 20 kHz

Input impedance.....2 kOhm

Directivity 0°/180°.....> 20 dB (1 kHz)

Equivalent noise.....20 dBA (SPL)

Maximum sound pressure level.....125 dB (THD<3%)

Interface data

Connector.....Ø 3.5 mm socket for external mic.
.....2 × Ø 3.5 mm stereo jack for headphone

Mechanical

Mounting_Tabletop (portable or fixed mounting) and flush-mounting
Dimensions (h x w x d) (w/o stem microphone)

Tabletop.....66 x 251 x 121 mm

Flush-mounting.....13 x 251 x 121 mm

Weight (incl. stem microphone).....0.75 kg

Color.....Champagne panel + gray base /
.....Champagne panel + black base

Stem length.....410 mm (standard version),
.....240 mm, 330 mm, 470 mm

Ordering Information

HCS-4886D_S/50.....Fully Digital Congress System Delegate Unit (tabletop/flush-mounting, 5 voting keys, IC-Card, 64 CHs, 256x32 LCD, champagne panel + gray base)

HCS-4886D_B/50.....Fully Digital Congress System Delegate Unit (tabletop/flush-mounting, 5 voting keys, IC-Card, 64 CHs, 256x32 LCD, champagne panel + black base)

HCS-4886X/50 Intercom Communication Operator Unit



Tabletop



Flush-mounting

Features

- Stylish and ergonomic design
- Hi-Fi loudspeaker
- Pluggable microphone
- "Closed Loop - Daisy Chain" connection topology
- Transmitting up to 64 CHs high quality digital audio signals on a dedicated 6-pin cable
- Supporting 48 kHz audio sampling rate, all 64 channels with a frequency response of 30 Hz to 20 kHz
- Built-in channel selector consists of up/down channel select buttons
- Excellent immunity to RF interference from mobile phones
- Supporting "PnP" (plug and play)
- Built-in multi-channel intercom facility

HCS-4886X/50 Operator Unit is only used for control of intercom facility, but cannot be used for conference discussion. Excellent immunity to RF interference from mobile phones. Channel selector and graphic display with backlighting, able to display characters from complex European languages or icon-based-scripts such as Chinese. Channel selection is automatically limited to the number of language channels available. Loudspeaker with superior acoustics with minimal feedback for enhanced intelligibility.

Functions

- Compliant to IEC 60914
- "Closed Loop - Daisy Chain" connection topology for a high operational system reliability: breakdown or replacement of a congress unit and connection failure of a cable will not influence other congress units in the system
- Based on TAIDEN originated MCA-STREAM digital audio processing and transmitting technologies
- Audio signals processed by high performance DSP: sound quality approaching CD quality
- Transmitting up to 64 CHs high quality digital audio signals on a dedicated 6-pin cable (general Cat.5 cable substitutable)
- Supporting 48 kHz audio sampling rate, all 64 channels with a frequency response of 30 Hz to 20 kHz
- Automatic recovery facility, supporting "PnP" (plug and play)
- Stem microphone can be unplugged during adjournment, easy to maintain
- Mini-microphone, with foam windshield
- Hi-Fi loudspeaker, minimal feedback, mutes automatically when microphone is active
- Excellent immunity to RF interference from mobile phones and comparable devices
- Built-in multi-channel intercom facility

Controls and Indicators

- Graphic 256x32 LCD with back-lighting for displaying:
 - ◆ Active microphone amount and request amount
 - ◆ Multilingual (simplified/traditional Chinese and English, etc.) menu
 - ◆ Channel number and language name
- Built-in channel selector with up/down channel select buttons
- Uni-directional electret condenser microphone with illuminated ring (red)
- Headphones volume up and down
- Five operating buttons with indicators

Interconnections

- Socket for pluggable microphone
- 2 × Ø 3.5 mm stereo headphone jack
- Ø 3.5 mm socket for external microphone or headset microphone
- 1.5 m cable with 6P-DIN plug
- 0.6 m cable with 6P-DIN socket

Technical Specifications

Electrical

Max. consumption.....2.3 W

Headphone connection

Frequency response.....30 Hz to 20 kHz

Earphone load impedance.....>16 Ohm

Earphone output.....10 mW

Recommended external microphone type (or headset microphone)

Transducer.....Electret-condenser

Polar pattern.....Uni-directional

Operating voltage.....5 VDC

Sensitivity.....-46 dBV/Pa

Frequency response.....50 Hz to 20 kHz

Input impedance..... 2 kOhm
 Directivity 0°/180°..... > 20 dB (1 kHz)
 Equivalent noise..... 20 dBA (SPL)
 Maximum sound pressure level..... 125 dB (THD<3%)

Interface data

Connector..... Ø 3.5 mm socket for external mic.
 2 × Ø 3.5 mm stereo jack for headphone

Mechanical

Mounting, Tabletop (portable or fixed mounting) and flush-mounting
 Dimensions (h x w x d) (w/o stem microphone)
 Tabletop..... 66 x 251 x 121 mm
 Flush-mounting..... 13 x 251 x 121 mm
 Weight (incl. stem microphone)..... 0.75 kg
 Color..... Champagne panel + gray base
 Stem length..... 410 mm (standard version),
 240 mm, 330 mm, 470 mm

Ordering Information

HCS-4886X_S/50..... Fully Digital Congress System Operator Unit
 (tabletop/flush-mounting, 256x32 LCD, for
 intercom communication, champagne panel
 + gray base)

HCS-4887D/50 Discussion Unit with Voting



Tabletop



Flush-mounting

Features

- Stylish and ergonomic design
- Hi-Fi loudspeaker
- Pluggable microphone
- 5 voting keys
- "Closed Loop - Daisy Chain" connection topology
- Supporting 48 kHz audio sampling rate
- Excellent immunity to RF interference from mobile phones
- Gain and EQ (5 band) of each microphone adjustable separately
- Supporting "PnP" (plug and play)
- Built-in multi-channel intercom facility
- Contactless IC card & password keypad module (HCS-8386K) for unit upgrading
- Fingerprint identification & password keypad module (HCS-8386F) for unit upgrading

The multi-functional delegate unit meets the demands of even the largest conferences. It provides facilities for speaking, registering a request-to-speak, registering a request-to-respond, listening, voting, IC-card reading and displaying conference and user-related information. Excellent immunity to RF interference from mobile phones. IC-card reader and graphic display with permanent backlighting. When the IC-card is inserted into the card reader, the graphic LCD screen automatically displays user-related information in the language assigned to the delegate chip card. The graphic LCD is able to display characters from complex European languages or icon-based-scripts such as Chinese. Loudspeaker with superior acoustics with minimal feedback for enhanced intelligibility.

Functions

- Compliant to IEC 60914
- "Closed Loop - Daisy Chain" connection topology for a high operational system reliability: breakdown or replacement of a congress unit and connection failure of a cable will not influence other congress units in the system
- Based on TAIDEN originated MCA-STREAM digital audio processing and transmitting technologies
- Audio signals processed by high performance DSP: sound quality approaching CD quality
- Gain and EQ (5 band) of each microphone adjustable separately, fitting the individual orator's voice to achieve perfect speech pickup any time
- Supporting 48 kHz audio sampling rate
- Integrated 80 Hz (18 dB/octave) high-pass filter (low-cut switch) to cut low frequency elements from the audio when needed
- Automatic recovery facility, supporting "PnP" (plug and play)
- Stem microphone can be unplugged during adjournment, easy to maintain
- Mini-microphone, with foam windshield
- Hi-Fi loudspeaker, minimal feedback, mutes automatically when microphone is active
- Excellent immunity to RF interference from mobile phones and comparable devices
- Microphone On/Off button, 5 voting keys
- Contactless IC card & password keypad module (HCS-8386K) for unit upgrading. The IC card may also be used to access the sign-in system
- Fingerprint identification & password keypad module (HCS-8386F) for biometric authentication with high reliability. The problem of a delegate's forgotten or lost IC card is also solved
- Every delegate unit is assigned an individual ID for convenient setup and to avoid double ID forever
- Facilities in stand-alone operation:
 - ◆ Set the number of delegates permitted to speak at the same time
 - ◆ Speak mode: OPEN/OVERRIDE/VOICE/APPLY/PTT
 - "OPEN" mode, microphone On/Off button with request-to-speak registration (AUTO)
 - "OVERRIDE" mode, microphone On/Off button control with override of the active microphones (FIFO)

- "VOICE" mode, acoustic active sensitivity and automatic switch-off time adjustable continuously, built-in "flash-on" technology, immediate microphone activation on speaking
- "APPLY" mode, delegate applies to speak by pressing microphone On/Off button, delegate only speaks when operator or chairman approved his application
- "PTT" mode, press microphone On/Off button to talk
- ◆ Voting function (Yes/No/Abstain)
- Multifunction voting in combination with the corresponding software modules:
 - ◆ For/Against
 - ◆ Parliamentary: YES/NO/ABSTAIN
 - ◆ Questionnaire: 1/2/3/4/5
 - ◆ Audience response: --/0/+/++
 - ◆ Parliamentary (NPPV): YES/NO/ABSTAIN/NPPV
 - ◆ Appraisal:
 - Satisfied (Four keys voting: perfectly satisfied/satisfied/basically satisfied/unsatisfied) (Three keys voting: satisfied/basically satisfied/unsatisfied) (Two keys voting: satisfied/unsatisfied)
 - Qualified (four/three/two keys voting)
 - Competent (four/three/two keys voting)
- Built-in IC-card reader
- Key-press sign-in
- Automatic video tracking implementation when cooperating with cameras, video switcher unit; preset positions on PC
- Built-in multi-channel intercom facility
- Set any delegate unit to be VIP unit
 - ◆ Up to 32 units can be set as VIP in one system via application software
 - ◆ VIP unit can be activated as long as the total of active microphones is not beyond 6 (incl. chairman/delegate/VIP unit)

Controls and Indicators

- Graphic 256x32 LCD with back-lighting for displaying:
 - ◆ Active microphone amount, request amount, delegates signed-in and voting results, etc.
 - ◆ Messages (messages from system administrator to all or part of participants)
 - ◆ Multilingual (simplified/traditional Chinese and English, etc.) menu
- Uni-directional electret condenser microphone with two-color illuminated ring (blue/red)
- Headphones volume up and down
- Five voting keys with indicators
- Microphone On/Off button with indicator

Interconnections

- Socket for pluggable microphone
- 2 × Ø 3.5 mm stereo headphone jack
- Ø 3.5 mm socket for external microphone or headset microphone
- 1.5 m cable with 6P-DIN plug
- 0.6 m cable with 6P-DIN socket

Technical Specifications

Electrical

Max. consumption.....2.3 W

Headphone connection

Frequency response.....30 Hz to 20 kHz

Earphone load impedance.....>16 Ohm

Earphone output.....10 mW

Recommended external microphone type (or headset microphone)

Transducer.....Electret-condenser

Polar pattern.....Uni-directional

Operating voltage.....5 VDC

Sensitivity.....-46 dBV/Pa

Frequency response.....50 Hz to 20 kHz

Input impedance.....2 kOhm

Directivity 0°/180°.....> 20 dB (1 kHz)

Equivalent noise.....20 dBA (SPL)

Maximum sound pressure level.....125 dB (THD<3%)

Interface data

Connector.....Ø 3.5 mm socket for external mic.

.....2 × Ø 3.5 mm stereo jack for headphone

Mechanical

Mounting_Tabletop (portable or fixed mounting) and flush-mounting
Dimensions (h x w x d) (w/o stem microphone)

Tabletop.....66 x 251 x 121 mm

Flush-mounting.....13 x 251 x 121 mm

Weight (incl. stem microphone).....0.75 kg

Color.....Champagne panel + gray base /

Champagne panel + black base

Stem length.....410 mm (standard version),

240 mm, 330 mm, 470 mm

Ordering Information

HCS-4887D_S/50.....Fully Digital Congress System Delegate Unit (tabletop/flush-mounting, 5 voting keys, IC-Card, 256x32 LCD, champagne panel + gray base)

HCS-4887D_B/50.....Fully Digital Congress System Delegate Unit (tabletop/flush-mounting, 5 voting keys, IC-Card, 256x32 LCD, champagne panel + black base)

HCS-4888DE/50 Discussion Unit with Voting



Tabletop



Flush-mounting

Features

- Stylish and ergonomic design
- Hi-Fi loudspeaker
- Pluggable microphone
- 5 voting keys
- "Closed Loop - Daisy Chain" connection topology
- Supporting 48 kHz audio sampling rate
- Excellent immunity to RF interference from mobile phones
- Gain and EQ (5 band) of each microphone adjustable separately
- Supporting "PnP" (plug and play)
- Contactless IC card & password keypad module (HCS-8386K) for unit upgrading
- Fingerprint identification & password keypad module (HCS-8386F) for unit upgrading

The multi-functional delegate unit meets the demands of even the largest conferences. It provides facilities for speaking, registering a request-to-speak, registering a request-to-respond, listening and voting. Excellent immunity to RF interference from mobile phones. Loudspeaker with superior acoustics with minimal feedback for enhanced intelligibility.

Functions

- Compliant to IEC 60914
- "Closed Loop - Daisy Chain" connection topology for a high operational system reliability: breakdown or replacement of a congress unit and connection failure of a cable will not influence other congress units in the system
- Based on TAIDEN originated MCA-STREAM digital audio processing and transmitting technologies
- Audio signals processed by high performance DSP: sound quality approaching CD quality
- Gain and EQ (5 band) of each microphone adjustable separately, fitting the individual orator's voice to achieve perfect speech pickup any time
- Supporting 48 kHz audio sampling rate
- Integrated 80 Hz (18 dB/octave) high-pass filter (low-cut switch) to cut low frequency elements from the audio when needed
- Automatic recovery facility, supporting "PnP" (plug and play)
- Stem microphone can be unplugged during adjournment, easy to maintain
- Mini-microphone, with foam windshield
- Hi-Fi loudspeaker, minimal feedback, mutes automatically when microphone is active
- Excellent immunity to RF interference from mobile phones and comparable devices
- Microphone On/Off button, 5 voting keys
- Contactless IC card & password keypad module (HCS-8386K) for unit upgrading. The IC card may also be used to access the sign-in system
- Fingerprint identification & password keypad module (HCS-8386F) for biometric authentication with high reliability. The problem of a delegate's forgotten or lost IC card is also solved
- Every delegate unit is assigned an individual ID for convenient setup and to avoid double ID forever
- Facilities in stand-alone operation:
 - ◆ Set the number of delegates permitted to speak at the same time
 - ◆ Speak mode: OPEN/OVERRIDE/VOICE/APPLY/PTT
 - "OPEN" mode, microphone On/Off button with request-to-speak registration (AUTO)
 - "OVERRIDE" mode, microphone On/Off button control with override of the active microphones (FIFO)
 - "VOICE" mode, acoustic active sensitivity and automatic switch-off time adjustable continuously, built-in "flash-on" technology, immediate microphone activation on speaking
 - "APPLY" mode, delegate applies to speak by pressing microphone On/Off button, delegate only speaks when operator or chairman approved his application
 - "PTT" mode, press microphone On/Off button to talk
 - ◆ Voting function (Yes/No/Abstain)
- Multifunction voting in combination with the corresponding software modules:
 - ◆ For/Against
 - ◆ Parliamentary: YES/NO/ABSTAIN
 - ◆ Questionnaire: 1/2/3/4/5
 - ◆ Audience response: --/0/+/++
 - ◆ Parliamentary (NPPV): YES/NO/ABSTAIN/NPPV

- ◆ Appraisal:
 - Satisfied (Four keys voting: perfectly satisfied/satisfied/basicly satisfied/unsatisfied) (Three keys voting: satisfied/basicly satisfied/unsatisfied) (Two keys voting: satisfied/unsatisfied)
 - Qualified (four/three/two keys voting)
 - Competent (four/three/two keys voting)
- Key-press sign-in
- Automatic video tracking implementation when cooperating with cameras, video switcher unit; preset positions on PC
- Set any delegate unit to be VIP unit
 - ◆ Up to 32 units can be set as VIP in one system via application software
 - ◆ VIP unit can be activated as long as the total of active microphones is not beyond 6 (incl. chairman/delegate/VIP unit)

Controls and Indicators

- Uni-directional electret condenser microphone with two-color illuminated ring (blue/red)
- Headphones volume up and down
- Five voting keys with indicators
- Microphone On/Off button with indicator

Interconnections

- Socket for pluggable microphone
- 2 × Ø 3.5 mm stereo headphone jack
- Ø 3.5 mm socket for external microphone or headset microphone
- 1.5 m cable with 6P-DIN plug
- 0.6 m cable with 6P-DIN socket

Technical Specifications

Electrical

Max. consumption.....1.8 W

Headphone connection

Frequency response.....30 Hz to 20 kHz

Earphone load impedance.....>16 Ohm

Earphone output.....10 mW

Recommended external microphone type (or headset microphone)

Transducer.....Electret-condenser

Polar pattern.....Uni-directional

Operating voltage.....5 VDC

Sensitivity.....-46 dBV/Pa

Frequency response.....50 Hz to 20 kHz

Input impedance.....2 kOhm

Directivity 0°/180°.....> 20 dB (1 kHz)

Equivalent noise.....20 dBA (SPL)

Maximum sound pressure level.....125 dB (THD<3%)

Interface data

Connector.....Ø 3.5 mm socket for external mic.
2 × Ø 3.5 mm stereo jack for headphone

Mechanical

Mounting_Tabletop (portable or fixed mounting) and flush-mounting

Dimensions (h x w x d) (w/o stem microphone)

Tabletop.....66 x 251 x 121 mm

Flush-mounting.....13 x 251 x 121 mm

Weight (incl. stem microphone).....0.75 kg

Color.....Champagne panel + gray base / Champagne panel + black base

Stem length.....410 mm (standard version), 240 mm, 330 mm, 470 mm

Ordering Information

HCS-4888DE_S/50....Fully Digital Congress System Delegate Unit (tabletop/flush-mounting, 5 voting keys, champagne panel + gray base)

HCS-4888DE_B/50....Fully Digital Congress System Delegate Unit (tabletop/flush-mounting, 5 voting keys, champagne panel + black base)

**HCS-4886MP
Flush-mounting Plate**



Features

- Used for flush-mounting of HCS-4886/87/88 series congress unit

Technical Specifications


Mechanical

Dimensions (h x w x d).....1.5 x 288 x 139 mm
 Weight.....42 g
 Color.....Gray

Ordering Information

HCS-4886MP.....Flush-mounting Plate (for HCS-4886/87/88 series congress unit)

**HCS-4886MP2
Flush-mounting Plate**

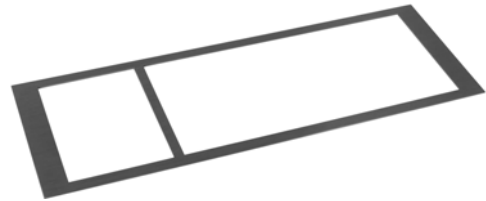

Features

- Used for flush-mounting of HCS-4886/87/88 series congress unit and HCS-8386K (contactless IC card & password keypad module) / HCS-8386F (Fingerprint identification & password keypad module)

Technical Specifications

Mechanical

Dimensions (h x w x d).....1.5 x 378 x 139 mm
 Weight.....50 g
 Color.....Gray

Ordering Information

HCS-4886MP2.....Flush-mounting Plate (for HCS-4886/87/88 series congress unit + HCS-8386K/F)