




PT-102VN

Wzmacniacz dystrybucyjny video 1:2 PT-102V



The Kramer PT102VN is a Composite or SDI video distribution amplifier. It will take one input, provide correct buffering and isolation and distribute the signal to two identical outputs.

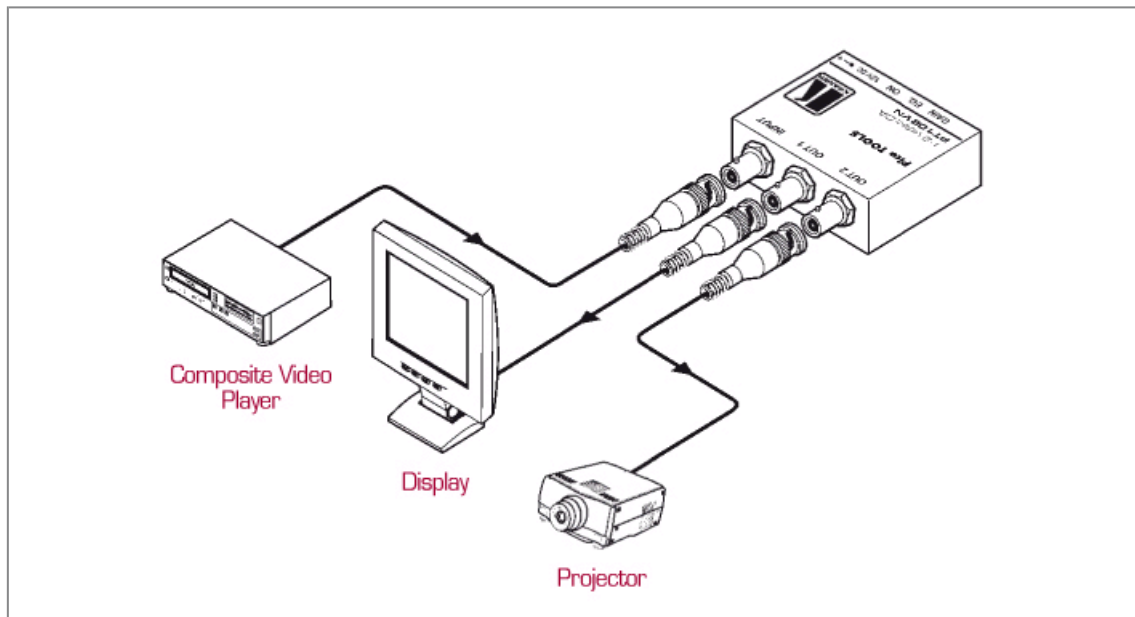



PT-102VN

FEATURES

- High Bandwidth - 430MHz (- 3dB).
- Level (Gain) and EQ (Peaking) Controls.
- Ultra-compact - Part of the Kramer PicoTOOLSTM family of extremely compact, high quality and cost effective solutions.

TECHNICAL SPECIFICATIONS

WSPÓŁCZYNNIK -K:	<0.05%
MAX. POZIOM SYGNAŁY WYJŚCIOWEGO:	2 Vpp.
ZASILANIE	12 VDC, 30 mA.
WYMIARY:	6cm x 6.5cm x 2.5cm (2.36" x 2.56" x 1", SZER., GŁĘB., WYS.)
MASA:	0.14 kg. (0.31 lbs.)
AKCESORIA:	Zasilacz
OPCJE	Model VA-50P Zasilacz sieciowy z sześcioma wyjściami z napięciem 12V DC.
WEJSCIE:	1 Composite Video, 1Vpp / 75Ω na łączu BNC.
WYJŚCIA:	2 Composite Video, 1Vpp / Ω na łączach BNC.
PASMO PRZENOSZENIA VIDEO:	470 MHz. -3dB, 415 MHz. - 0.1dB.
POŁĄCZENIE WEJŚCIA/WYJŚĆ:	AC(poprzez kondensator)
WZMOCNIENIE ROZNICOWE:	0.16%
RÓŻNICA FAZ:	0.11 stopnia
REGULACJE:	WZmocnienia :od -0.7 do +2.3 dB, EQ.:od 0 do 2.2 dB, poprzez trymerydostępne z panelu czołowego.
STOSUNEK SYGNAŁ/SZUM:	-71.6 dB.