




VM-5AD

Wzmacniacz dystrybucyjny 1:5 symetrycznego sygnału audio



The Kramer **VM-5AD** is a high performance distribution amplifier for balanced mono or unbalanced stereo audio signals on XLR connectors. It takes a mono or stereo input and distributes the signal to five identical outputs.

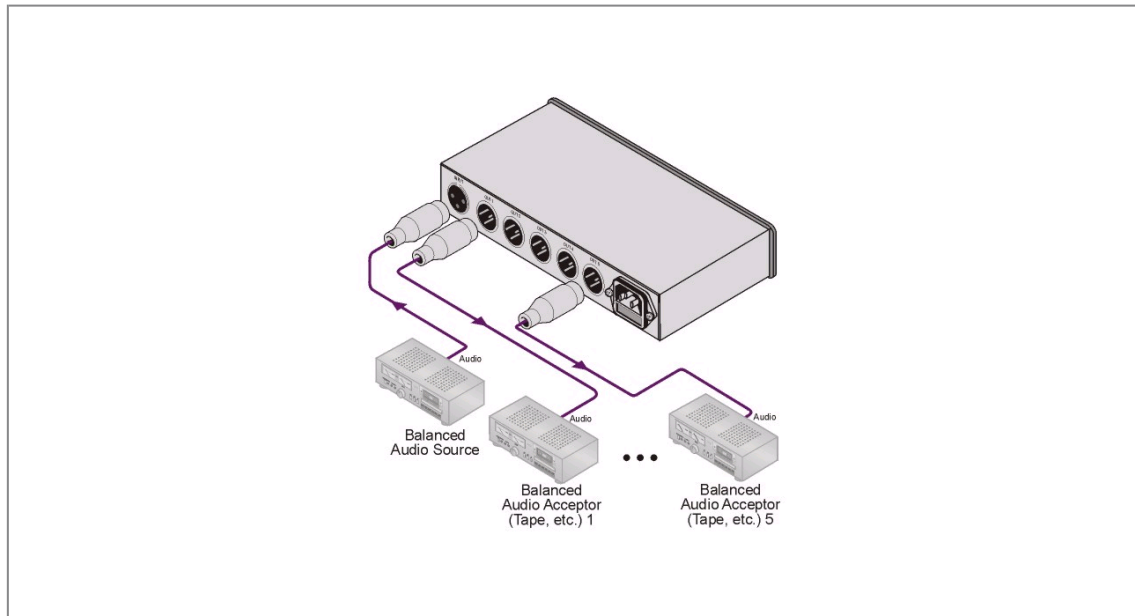



VM-5AD

FEATURES

- Level (Gain) Controls.
- Mic or Line Input Level Selection.
- Balanced/Unbalanced Input Selection.
- S/N Ratio - 88dB.
- Desktop Size - Compact size. Can be rackmounted in a 1U rack space with the optional RK-MEDN adapter.

TECHNICAL SPECIFICATIONS

REGULACJA POZIOMU SYGNAŁU:	20 dB.
ZASILACZ:	230VAC, 50/60 Hz (115V U.S.A.), 3.4 VA.
WYMIARY:	24.5cm X 18cm X 4.5cm (9.6" x 7" x 1.8", SZ., GŁĘB., WYS.).
MASA:	1.2 kg. (2.7 lbs.)
AKCESORIA:	Sznur sieciowy.
WEJŚCIE:	1 mono symetryczne audio, lub nie symetryczne /nie symetryczne/ stereo, do 18Vpp/50k Ohm na złączu typ XLR żeński. Mikrofonowe - 1 mono symetryczne mikrofonowe lub nie symetryczne / nie symetryczne/ stereo mikrofonowe - 5mV/10k Ohm .
WYJŚCIA:	5 mono symetryczne audio lub niesymetryczne stereo, do 20Vpp/50 Ohm na złączu typ XLR męski.
PASMO PRZENOSZENIA AUDIO:	80 kHz -3dB.
SZTOSUNEK SYGNAŁ/SZUM:	Lepiej niż 88 dB.
TŁUMIENIE POMIĘDZY KANAŁAMI:	>60dB.
THD:	0.011%