




## VS-21B

Przełącznik 2x1 kompozyt wideo i audio stereo lub komponent



**VS-21B** jest wysokiej klasy przełącznikiem sygnału kompozyt wideo i audio stereo lub komponent. Przełącza jedno z dwóch wejść na pojedyncze wyjście.

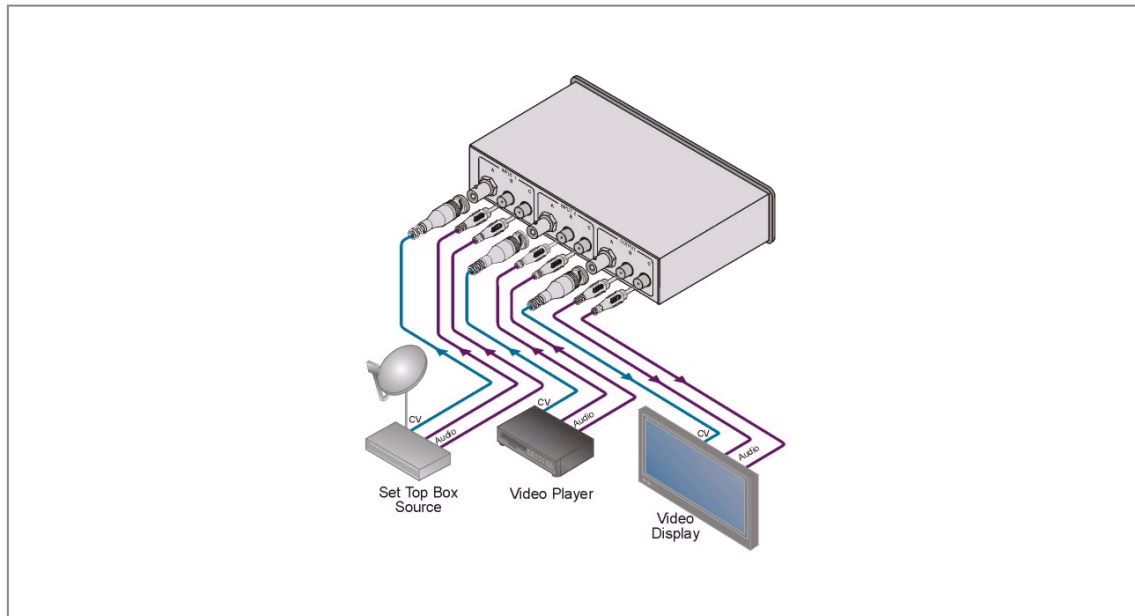



## VS-21B

---

### FEATURES

---

- High Bandwidth - 700MHz (-3db)
- Inputs (2) - 1 BNC and 2 RCAs each
- Output - 1 BNC and 2 RCAs
- HDTV Compatible
- Mechanical (Passive) Switching - No power required
- Desktop Size - Compact size. Two units can be rack mounted side-by-side in a 1RU rack space with the optional RK-81 adapter

### TECHNICAL SPECIFICATIONS

---

**INPUTS:** 2 sets of composite video, each on a BNC connector, and 2 sets of unbalanced stereo audio, each on RCA connectors, or 2 sets of component video (YUV) each on a BNC connector and 2 RCA connectors

**OUTPUT:** 1 set of composite video on a BNC connector, and unbalanced stereo audio on RCA connectors, or 1 set of component video (YUV) on a BNC connector and 2 RCA connectors

**BANDWIDTH (- 700MHz 3dB):**

**CONTROLS:** Channel selector via push button on front panel

**SWITCHING SYSTEM:** Mechanical, "Break-before-make"

**COUPLING:** DC

**AUDIO THD + NOISE:** 0.085%

**AUDIO 2nd HARMONIC:** 0.005%

**POWER SOURCE:** Not fed - mechanical

**DIMENSIONS:** 18.8cm x 10.2cm x 4.4cm (7.4" x 4" x 1.7"), W, D, H

**WEIGHT:** 0.64kg. (1.4lbs.) approx.

**OPTIONS:** RK-81 19" Rack Adapter

**DIFF. GAIN:** 0.01%

**DIFF. PHASE:** 0.01°

**K-FACTOR:** <0.05%

**VIDEO S/N RATIO:** 81dB

**VIDEO CROSSTALK (all hostile):** 51dB@5MHz