




VS-44AV

4x4 Video & Audio Switcher



The **VS-44AV** is a high performance switcher (4 crosspoints) for composite video and unbalanced stereo audio signals. It can route up to 4 inputs to four different outputs, but it can not distribute any one signal to multiple outputs.

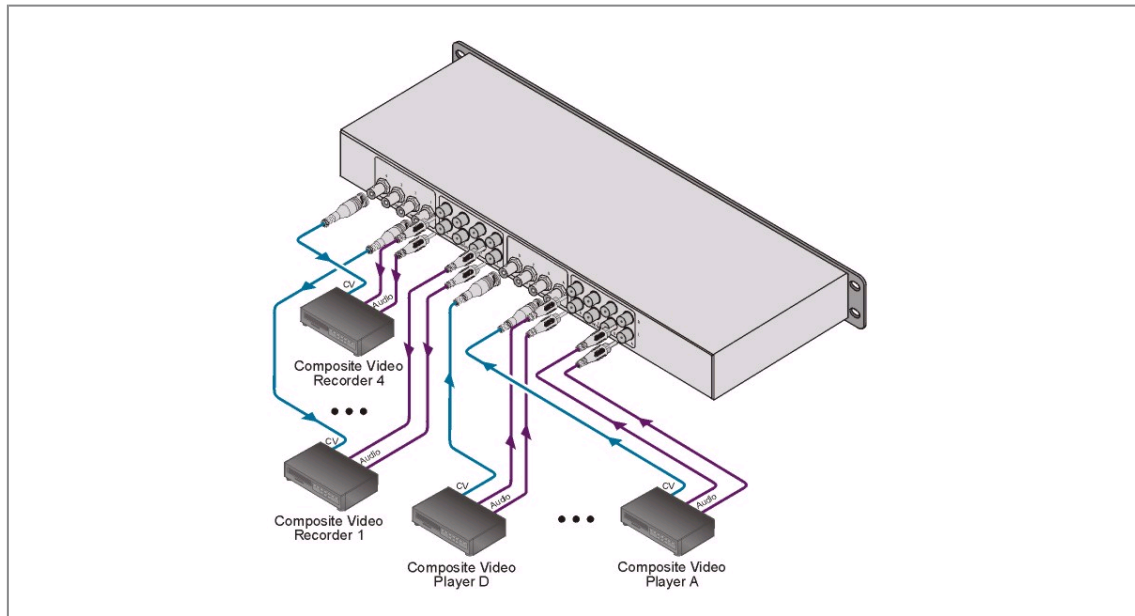



VS-44AV

FEATURES

- Bandwidth - 220MHz (- 3dB).
- Mechanical (Passive) Switching - No powerrequired.
- Standard 19" Rack Mount Size - 1U.

TECHNICAL SPECIFICATIONS

INPUTS: 4 Video, 1Vpp/75 Ω on BNCs. 4 stereo audio, up to 36Vpp (typ.) on RCAs.

OUTPUTS: 4 Composite Video (or RGBS), 1 Vpp/75 Ω on BNCs. 4 stereo audio, up to 36Vpp (typ.) on RCAs.

SWITCHING SYSTEM: Mechanical, Break-before-Make.

CROSSPOINTS: 16 for video, 16x2 for audio,4 active at any given time.

VIDEO CROSSTALK: -46 dB @ 5MHz.

BANDWIDTH: Video: 220 MHz -3dB; Audio: 100 kHz, -3dB.

DIMENSIONS: 19 inch (W),4 inch (D), 1U (H) rack mountable.

WEIGHT: 1.6 kg. (3.5 lbs.) Approx.